#### ENVIRONMENTAL MANAGEMENT PLAN (EMP) REPORT

#### For

# MYANMAR ASIA OPTICAL INTERNATIONAL COMPANY LIMITED (FACTORY-2)

Part-II
Plot No. (C1, C2), Mingaladon Industrial Park,
Mingaladon Township, Yangon Region, Myanmar



#### **PROPONENT**



**Myanmar Asia Optical International Company Limited** 

Plot No. (C1, C2), Mingaladon Industrial Park, Mingaladon Township, Yangon Region, Myanmar

Tel: +959-517 3541

Email: mao80@asiaoptical.com.mm, maoiimexp2@gmail.com

#### PREPARED BY



Green Myanmar Environmental Services Co., Ltd.

No. (115), Kanaung Min Thar Gyi Road, Industrial Zone (1), Hlaing Thar Yar Industrial City, Yangon Region, Myanmar

Tel: +95-9-897978296

Email: gmescompany@gmail.com, info@gmes-mm.com

Website: www.gmes-mm.com

Facebook: Green Myanmar Environmental Services Co., Ltd.

ENVIRONMENTAL MANAGEMENT PLAN (EMP) REPORT
For
MYANMAR ASIA OPTICAL INTERNATIONAL COMPANY LIMITED
(FACTORY-2)
Part-II

#### **Report Review Form**

Report Title: Environmental Management Plan (EMP) Report for Manufacturing of all kinds of Lens, Lens Units, Optical Apparatuses, Electronic Apparatuses, Self-focus Lens Array (SLA), Plastic Parts for Electronic Apparatuses and other Apparatuses on CMP Basis (Factory-2)

Apparatuses and other Apparatuses on CMP Basis (Factory-2) Report Version: 00 Version **Proponent:** Prepared by: Myanmar Asia Optical International **Green Myanmar Environmental Services Company Limited Company Limited** Plot No. (C1, C2), Mingaladon Industrial No. 115, Kanaung Min Thar Gyi Road, Park, Mingaladon Township, Yangon Hlaing Thar Yar Industrial City, Industrial Zone (1), Hlaing Thar Yar Township, Region, Myanmar. Yangon Region, Myanmar. Tel: +959-517 3541 Tel: +959-897 978 296 Email: mao80@asiaoptical.com.mm, Email: info@gmes-mm.com, maoiimexp2@gmail.com gmescompany@gmail.com

Prepared by: Daw Hnin Htet Htet Hlaing	Position: Environmental Specialist
Submitted Date: 21/03/2022	Signature:
Checked by: Daw Kyaw Kyaw Win	Position: Consultant
Checked Date: 29/04/2022	Signature:
Approved by: U Kyaw Soe Win	Position: Managing Director
	(ECD Registration No. 0019)
Date: 12/5/2022	Signature:

**Summary: EMP Report** 

This document presents the environmental management plan (EMP) report as required for Manufacturing of all kinds of Lens, Lens Units, Optical Apparatuses, Electronic Apparatuses, Slf-focus Lens Array (SLA), Plastic Parts for Electronic Apparatuses and other Apparatuses on CMP Basis (Factory-2).

## TABLE OF CONTENTS

	OF CONTENTS	
	F FIGURES	
	F TABLES	
DOCUN	MENT CERTIFICATION AND DECLARATION	XV
	ITMENT AND ACKNOWLEDGEMENT	
	EVIATION	
ാ။	ဂျဉ်းချုပ်အစီရင်ခံစာ	l
NC-C	နောက်ခံအကြောင်းအရာ	l
၁-၂။	လုပ်ငန်းလုပ်ကိုင်သူ၏အချက်အလက်များ	l
	မူဝါဒ၊ ဥပဒေနှင့်အဖွဲ့အစည်းဆိုင်ရာ မူဘောင်	
o-911	စီမံကိန်းအကြောင်းအရာဖော်ပြချက်	IX
<b>၁-</b> 9	:–၁။ မှန်ဘီလူးအမျိုးမျိုးအတွက် ပလတ်စတစ်ဘူးများ (ပလတ်စတစ်ပုံသွင်းခြင်း)	X
	–၂။ ကင်မရာအတွက် ပလတ်စတစ်အစိတ်အပိုင်းများ (ပလတ်စတစ်ပုံသွင်းခြင်း)	
<b>၁</b> -9	–၃။ ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း (SLA)	XII
၁–၅။	လက်ရှိသဘာဝပတ်ဝန်းကျင်နှင့်လူမှုရေးဆိုင်ရာအခြေအနေဖော်ပြချက်များ	XIII
၁-၅	၂–၁။ ပတ်ဝန်းကျင်ဆိုင်ရာအခြေခံအချက်အလက်များ (မူလအခြေခံအချက်အလက်များ)	XIII
၁-၅	၂–၂။ သဘာဝပတ်ဝန်းကျင်/ရုပ်ပတ်ဝန်းကျင် (ဆင့်ပွားအချက်အလက်များ)	XXV
၁-၆။	သက်ရောက်မှုများနှင့်လျော့ပါးစေရေးနည်းလမ်းများအကျဉ်းချုပ်	XXVI
၁-၇။	စောင့်ကြပ်ကြည့်ရှုရေးအစီအစဉ်	XXVI
၁–၈။	အများပြည်သူနှင့် တွေ့ဆုံဆွေးနွေးခြင်းနှင့် ထုတ်ဖော်ကြေညာခြင်း	XXXIV
ე-ი	–၁။ စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံခြင်း	XXXIV
ე-ი	–၂။ သက်ဆိုင်ရာအစိုးရအဖွဲ့နှင့်စက်ရုံနီးချင်းများနှင့် တွေ့ဆုံညှိနှိုင်းဆွေးနွေးခြင်း	XXXVI
၁-၉။	နိဂုံးနှင့်အကြံပြုချက်များ	XXXIX
1.0 E	EXECUTIVE SUMMARY	1
1.1	Introduction	1
1.2	Proponent Information	1
1.3	Policy, Legal and Institutional Framework	7
1.4	Description of the Project.	8
1.4	`	
1.4	.2 Plastic Parts for Camera (Injection Molding Process)	9
1.4	.3 Self-Focus Lens Array (SLA) (Glass Tube)	10

1.5	Description of the Current Environmental and Social Conditions	11
1.5.1	Environmental Baseline Situation (Primary Data)	11
1.5.2	Natural Environment/ Physical Component (Secondary Data)	22
1.6	Summary of Impacts and Mitigation Measures	22
1.7	Monitoring Program	23
1.8	Public Consultation and Information Disclosure	31
1.8.1	Meeting with Factory Employees	31
1.8.2	Consultation Meeting with the Relevant Government Organization and	
	Neighbors of the Factory	32
1.9	Conclusions and Recommendations	35
2.0 IN	TRODUCTION	36
2.1	Background	36
2.2	Type of EMP/IEE and EIA Requirement	36
2.3	Objectives of the EMP	37
2.4	Methodology Adopted	37
2.5	Identification of the Project Proponent	37
2.5.1	Proponent Information	37
2.5.2	List of Stakeholders	38
2.5.3	List of Directors and Executives	38
2.5.4	Organization of Management	39
2.6	Environmental Management Plan (EMP) Study Team	41
2.7	Structure of the Report	44
3.0 PC	DLICY, LEGAL AND INSTITUTIONAL FRAMEWORK	46
3.1	Background	46
3.2	Policy Framework	46
3.3	Myanmar Regulatory Framework for Environmental Assessment	46
3.3.1	National Environmental Policy of Myanmar (2019)	47
3.3.2	Myanmar Agenda 21 (1997)	47
3.3.3	National Sustainable Development Strategy (2009)	47
3.3.4	The Environmental Conservation Law (2012)	48
3.3.5	The Environmental Conservation Rules (2014)	50
3.3.6	Environmental Impact Assessment Procedure (2015)	50
3.3.7	National Environmental Quality (Emission) Guidelines (2015)	51
3.4	Environmental-related Laws and Regulations in Myanmar	51
3.5	International Conventions, Treaties and Agreements	58
3.6	Standards and Guidelines for Surrounding Environment of the Project	58

3	3.6.1	Air Quality	58
3	3.6.2	Water Quality	60
3	3.6.3	Noise Levels	61
3	3.6.4	Light Intensity	62
3.7	Ins	titutional Arrangement for Environmental Management	63
3	3.7.1	Institutional Arrangement during Operation Phase	63
3	3.7.2	Institutional Arrangement during Decommissioning Phase	63
3.8	Ke	y Commitment of Proponent for Environmental Management	64
4.0	DES	CRIPTION OF THE PROJECT	71
4.1	Pro	oject Location	71
4.2	Ar	ea and Land Ownership	72
4.3	Sit	e Description	72
4	1.3.1	Site Accessibility	72
4	1.3.2	Site Boundaries and Surrounding Environment	72
4.4	Fir	nancial Information and Investment Plan	73
4	1.4.1	Financial Information	73
4	1.4.2	Investment Plan	74
4.5	Wo	orking Hour and Manpower Requirement	74
4	1.5.1	Working Hour	74
4	1.5.2	Manpower Requirement	75
4.6	Inf	rastructure of the Factory	75
4.7	Ra	w Materials and Subsidiaries	78
4	1.7.1	Raw Materials	78
4	1.7.2	Chemical Usage	80
4.8	Uti	llities	82
4	1.8.1	Electricity	82
4	1.8.2	Generators	82
4	1.8.3	Fuel Requirements	82
4	1.8.4	Water Requirement	84
4.9	Ma	chinery and Equipment List	89
4.1	0 Pro	oduct Profile and Production Plan	90
4.1	1 Tra	ansportation of Raw Materials and Products	91
4.1	2 M	AOI Production Process	92
4	1.12.1	Plastics Lens Case (Plastic Forming)	92
4	1.12.2	Plastic Parts for Camera (Injection Molding Process)	96
4	1.12.3	Self-Focus Lens Array (SLA) (Glass Tube)	102

4.13 I	Orainage and Sewage Disposal	109
4.14 V	Vastewater Management System	111
4.14.	Wastewater Management	111
4.14.2	2 Solid Waste	112
4.15	Other Facilities	114
4.15.1	Cooling System	114
4.15.2	2 Ventilation System	114
5.0 DES	CRIPTION OF THE CURRENT ENVIRONMENTAL AND SOCIA	L
CON	NDITIONS	116
5.1 N	Methodology for Data Collection and Analysis	116
5.1.1	Primary Data Collection and Analysis	116
5.1.2	Secondary Data Collection and Analysis	116
5.2 E	Environmental Baseline Situation (Primary Data)	116
5.2.1	Air Quality	117
5.2	.1.1 Ambient Air Quality	118
5.2	.1.2 Workplace (Indoor) Air Quality	121
5.2	.1.3 Generators' Stack Emission Measuring	123
5.2.2	Noise Level	124
5.2	.2.1 Ambient Noise Levels	124
5.2	.2.2 Workplace (Indoor) Noise Levels	126
5.2.3	Light Intensity	126
5.2.4	Water and Wastewater Quality	128
5.2	.4.1 Water Quality	129
5.2	.4.2 Wastewater Quality	130
5.2.5	Soil Quality	131
5.3 N	Natural Environment/ Physical Components (Secondary Data)	133
5.3.1	Study Area (Mingaladon Township)	133
5.3.2	Climate	134
5.3.3	Topography	135
5.3.4	Geology	135
5.3.5	Soil	136
5.3.6	Hydrology	137
5.4 E	Biological Components (Secondary Data)	138
5.4.1	Natural Vegetation (Flora)	138
5.4.2	Wildlife (Fauna)	138
5.5 S	Socio-Economic Components (Secondary Data)	138

5	.5.1	Population and Communities	138
5	.5.2	Religion	139
5	.5.3	Education Attainment	139
5	.5.4	Connectivity	139
5	.5.5	Health Facility	139
5	.5.6	Economy	139
5	.5.7	Land Use	139
5	.5.8	Workforce	140
6.0	SUM	MARY OF IMPACTS	141
6.1	Imp	pact on Air Emissions and Ambient Air Quality	141
6.2	Imp	pact on Noise	143
6.3	Lig	ht Pollution	143
6.4	Wa	ter Use	144
6.5	Soi	l Contamination	144
6.6	Rav	w Material Optimization and Waste Discharge	144
6.7	Ene	ergy Use	145
6	.7.1	Electricity Consumption	146
6	.7.2	Diesel Consumption	146
7.0	DESC	CRIPTION OF PROPOSED MITIGATION MEASURES	147
7.1	Mi	tigation Measures for Air Emissions and Ambient Air Quality	147
7.2	Mi	tigation Measures for Noise	147
7.3	Mi	tigation Measures for Light Pollution	148
7.4	Wa	ter Use Reduction	148
7.5	Soi	l Quality	148
7.6	Sol	id Waste Control	149
7.7	Mi	tigation Measures for Energy Consumption	
7	.7.1	Conservation of Electricity	
7	.7.2	Minimizing Diesel Fuel Consumption	
8.0		ITORING PROGRAM	
8.1		vironmental Monitoring Plan	
8.2		imated Cost for Environmental Monitoring	
8.3		vironmental Management Team	
8.4		emical Management Plan	
	.4.1	Registration, Registry of Chemical / Hazardous Substances and SDS	
	.4.2	Labeling and Warning Signs	162
8	.4.3	Handling	162

8.4.4	Transportation	163
8.4.5	Storage	163
8.4.6	Identification of Hazardous Chemicals	164
8.4.7	Chemicals Risk Control Measure	165
8.4.8	Training	167
8.4.9	Waste Disposal	167
8.4.10	Emergency Preparedness	167
8.4.11	Emergency Response Plan (ERP) for Chemical Leakage / Spillage of	r Fire in
	MAOI	168
9.0 EME	RGENCY PLAN	169
9.1 Em	nergency Management Team	169
9.2 Em	nergency Response Plan	170
9.3 Ev	acuation Routes	172
9.4 Fir	e Emergency Plan	175
9.4.1	Organization and Responsibilities	175
9.4.2	Emergency Resolutions Procedure	176
9.4.3	Fire Fighting and Protection Measure	178
9.4.4	Fire Fighting Equipment	179
9.4.5	Operating a Fire Extinguishers	182
9.5 Em	nergency Medical Services	184
9.5.1	Health Care in the Factory	184
9.5.2	First Aid and Emergency Care	184
9.5.3	Women Workers and Women's Health	184
9.6 Oc	cupational Health and Safety System	185
9.6.1	Occupational Health Surveillance Programme	185
9.6.2	Industrial Accidents Survey Management	185
9.7 Na	tural Hazard	186
9.7.1	Flood	186
9.7.2	Earthquake	187
10.0 CAP	ACITY DEVELOPMENT AND TRAINING	189
10.1 Co	mpany Working Task Force	189
10.1.1	Human Resource Policy	189
10.1.2	Employee Complaint Mechanism	189
10.1.3	Emergency Response Team	190
10.1.4	Internal Emergency Communication (Factory-2)	192
10.2 Em	nployee's Welfare Plan	193

10.2.	1 Accommodation	193
10.2.	2 Uniform	194
10.2.	3 Meal System	194
10.2.	4 Health Care	196
10.2.	5 Parking	200
10.2.	6 Locker Room	200
10.2.	7 Social Security Fund	200
10.2.	8 Staff Activities	200
10.3	Reporting Requirements	203
10.3.	1 Documentation	203
10.3.	2 Reporting	203
10.4	Safety Training	205
10.4.	1 Chemical Safety Training	205
10.4.	2 Fire Safety Training	208
10.4.	3 Fire Drill Procedure Training	209
10.4.	4 Health Safety Trainings	211
11.0 PU	JBLIC CONSULTATION AND DISCLOSURE	212
11.1	Purpose	212
11.2	Methodology and Approach	212
11.3	Meeting with Factory Employees	212
	Consultation Meeting with the Relevant Government Organization and N	•
	the Factory	
	ORK PLAN AND IMPLEMENTATION SCHEDULE	
	Social Environmental Aspects	218
12.2	Time Schedule for Implementation of the EMP	218
13.0 CC	ONCLUSIONS AND RECOMMENDATIONS	219
13.1	Findings	219
13.2	Recommendations	220
13.3	Conclusions	221

## LIST OF FIGURES

Figure 1-1 Process Flow Diagram of Optical Lens Cases Manufacturing Process	8
Figure 1-2 Process Flow Diagram of Plastic Parts Manufacturing Process	9
Figure 1-3 Process Flow Diagram of SLA Manufacturing Process	10
Figure 1-4 Location of Ambient Air Quality Measuring Point	12
Figure 1-5 Status of Ambient Air Quality Measurement	12
Figure 1-6 Status of Generator Stack Emission Measurement	14
Figure 1-7 Locations of Ambient Noise Level Measuring Points	15
Figure 1-8 Location of Water Sampling Points	18
Figure 1-9 Location of Wastewater Sampling Points	18
Figure 1-10 Status of Wastewater Sampling	19
Figure 1-11 Location of Soil Sampling Point	21
Figure 1-12 Status of Soil Sampling	21
Figure 1-13 Employees Discussion Program	31
Figure 1-14 Consultation Meeting with the Relevant Government Organization and the Neighbors of the Factory	33
Figure 2-1 Organization Chart of the Project Proponent	40
Figure 3-1 Institutional Arrangement during the Operation Phase	63
Figure 3-2 Institutional Arrangement during the Decommissioning Phase	64
Figure 4-1 Location of the Factory	71
Figure 4-2 Access Road to the Proposed Project	72
Figure 4-3 Surrounding Environment of the Factory-2	73
Figure 4-4 Factory-2 Layout Plan	76
Figure 4-5 Photos of Office and Factory Buildings (MAOI-2)	77
Figure 4-6 Raw Materials and Raw Materials Storage Area	78
Figure 4-7 Generators and Generator Room at Factory-2	82
Figure 4-8 Power Supply Distribution Plan of Factory-2	83
Figure 4-9 Transformer at Factory-2	83
Figure 4-10 Diesel Storage Tanks in Factory-2	84
Figure 4-11 Drinking Water Test Results	85
Figure 4-12 Water Treatment Systems at Factory-2	86
Figure 4-13 Chemicals used in Pure Water Process	86
Figure 4-14 Water Storage Tanks	86
Figure 4-15 Water Treatment System Process Flow	87
Figure 4-16 All Kinds of Plastic Parts	91

Figure 4-17 Self-Focus Lens Array (SLA) (Glass Tube)	91
Figure 4-18 Forklifts used in MAOI	92
Figure 4-19 Process Flow Diagram of Optical Lens Cases Manufacturing Process	92
Figure 4-20 Process Flow Diagram of Plastic Parts Manufacturing Process	96
Figure 4-21 Dehumidifying and Drying Feeder Machine	98
Figure 4-22 Finished Products	101
Figure 4-23 Process Flow Diagram of SLA Manufacturing Process	102
Figure 4-24 Basins and Drains in the Factory-2	110
Figure 4-25 Toilets in the Factory-2	110
Figure 4-26 Drainage Layout of Factory-2	110
Figure 4-27 Filter Press at MAOI-2	111
Figure 4-28 Wastewater Treatment System of Factory-2	112
Figure 4-29 Wastewater Treatment Plant (Factory-2)	112
Figure 4-30 Waste Bins	113
Figure 4-31 Air Conditioning System at Factory-2	114
Figure 4-32 Ventilation Facilities at MAOI-2	115
Figure 5-1 Location of Measuring Ambient Air Quality at MAOI-2	119
Figure 5-2 Photos of Measuring Ambient Air Quality at MAOI-2	120
Figure 5-3 (a) Windrose Plot superimposed over the Project Site, (b) Windrose Plot, ( Class Frequency Distribution Chart for MAOI-2	
Figure 5-4 Location of Measuring Indoor Air Quality at MAOI-2	122
Figure 5-5 Some Photos of Measuring Indoor Air Quality at MAOI-2	
Figure 5-6 Generators' Stack Emission Measuring at MAOI-2	123
Figure 5-7 Ambient Noise Graph (24-hour) for Factory-2	125
Figure 5-8 Location of Measuring Light Intensity at Factory-2	127
Figure 5-9 Light Measurement Activities	128
Figure 5-10 Location of Tube Well Water Sampling Points	129
Figure 5-11 Location of Wastewater Sampling Points	130
Figure 5-12 Recorded Photos of Wastewater Samplings	131
Figure 5-13 Location of Soil Sampling Point in Factory-2	132
Figure 5-14 Photo of Taking Soil Sample inside the Factory Premise	132
Figure 5-15 Map of Mingaladon Township	134
Figure 5-16 Geological Map of Yangon Region	136
Figure 5-17 Soil Map of Yangon	137
Figure 8-1 Organization Chart of the Environmental Management Team	161
Figure 8-2 Chemical Storage Area	164

Figure 8-3 Systematically Storage of Chemicals	168
Figure 9-1 Organization Chart of Emergency Management Team	169
Figure 9-2 Emergency Response Team Organization Chart	171
Figure 9-3 Emergency Routes Hanged up on the Wall	172
Figure 9-4 Emergency Route Map of Factory-2	173
Figure 9-5 Fire Extinguisher Installed in Factory-2	174
Figure 9-6 Organization Chart of Fire Emergency Management Team	175
Figure 9-7 Fire Emergency Resolutions Procedure Flow Chart	176
Figure 9-8 Selection Guidelines for Fire Extinguishers	179
Figure 9-9 Firefighting Equipment Used in Factory-2	180
Figure 9-10 Photos of Emergency Exit Way	181
Figure 9-11 Photos of Notices	181
Figure 9-12 Clinic in Factory Compound	184
Figure 9-13 Flow Chart for Industrial Accidents Survey Management	186
Figure 9-14 Locations of Flood Disaster in Myanmar	187
Figure 9-15 Seismic Zone Map of Myanmar	188
Figure 10-1 Organization Chart of WCC	190
Figure 10-2 Emergency Response Team	191
Figure 10-3 Dormitories (Factory-2)	194
Figure 10-4 Uniform	194
Figure 10-5 Three Months Routine Menu	195
Figure 10-6 Kitchen	195
Figure 10-7 Canteen for Staffs (Factory -2)	196
Figure 10-8 Certificate of Nurse	199
Figure 10-9 Clinic	199
Figure 10-10 Parking Areas (Factory-2)	200
Figure 10-11 Lockers	200
Figure 10-12 Donation	202
Figure 10-13 Workplace Incident Records	204
Figure 10-14 Step by Step of Solving Accident Injury	205
Figure 10-15 Chemical Safety Training	207
Figure 10-16 Chemical Related Substance Knowledge Training	207
Figure 10-17 Firefighting Training	208
Figure 10-18 Fire Drill Plan (Factory 2)	210
Figure 10-19 Fire Drill Exercise (Factory 2)	211
Figure 11-1 Employees Discussion Program	213

Environmental Management Plan (EMP) Report for Factory-2 (Part-	II)
Myanmar Asia Optical Interna	ational Company Limited

Figure 11-2 Consultation Meeting with the Relevant Government Organization and the		
Neighbors of the Factory	21	5

## LIST OF TABLES

Table 1-1 Organization of the GMES's EMP Study Team	4
Table 1-2 Result of Water Quality (GMES Laboratory)	19
Table 1-3 Result of Wastewater Quality (GMES Laboratory)	20
Table 1-4 Environmental Monitoring Plan for the Operation and Decommissioning Phas	es.24
Table 1-5 Excerpts from Suggestion of the Factory Employees	31
Table 1-6 Summary of Discussion in the Meeting	34
Table 1-7 Description of Suggestion Letter from the Meeting	34
Table 2-1 Proponent Information	38
Table 2-2 List of Stakeholders	38
Table 2-3 List of Directors and Executives	38
Table 2-4 Organization in charge of EMP Implementation	41
Table 2-5 Organization of the GMES's EMP Study Team	41
Table 2-6 Structure of the Report	44
Table 3-1 Environment-Related Laws and Rules	52
Table 3-2 International Treaties and Conventions	58
Table 3-3 Ambient Air Quality Guidelines for Operation and Closing Phases	59
Table 3-4 Small Combustion Facilities Emission Guidelines	59
Table 3-5 WHO Drinking Water Standards (2011)	60
Table 3-6 Standards for Wastewater, Stormwater Runoff, Effluent and Sanitary Discharg	-
(General Application)	
Table 3-7 Ambient Noise Level Standards for Operation Phase	
Table 3-8 OHS Noise Exposure Limits for the Work Environment (Noise Exposures in	,
T.I. 20T. 1.I. 1.I. 1	
Table 3-9 Typical Light Levels	
Table 3-10 List of Key Commitments	
Table 4-1 Financial Information	
Table 4-2 Changed Amount in Total Amount of Foreign Capital	
Table 4-3 Investment Plan	
Table 4-4 Working Hour of the Factory	
Table 4-5 Human Resources Requirement	
Table 4-6 List of Raw Materials for Plastic Packing Processing	
Table 4-7 List of Raw Materials for Plastic Parts for Camera Production	
Table 4-8 List of Raw Materials for SLA Production	
Table 4-9 List of Chemicals for Use on Plastic Parts of Electronic Products Processing	81

Table 4-10 List of Chemicals for Use on SLA Processing	81
Table 4-11 Specification of the Generators	82
Table 4-12 Electricity Consumption	83
Table 4-13 Diesel Consumption	84
Table 4-14 Annual Water Consumption (Tube Well)	88
Table 4-15 Annual Water Consumption (MIP Water Supply Tap)	88
Table 4-16 Pure Water Consumption for General Use	88
Table 4-17 List of Machinery and Equipment for Optical Lens and Plastic Parts Pro	duction 89
Table 4-18 List of Machines for SLA Production	89
Table 4-19 Production Plan	90
Table 5-1 Parameters Measured for Ambient Air Quality	118
Table 5-2 Location of Ambient Air Quality Measuring Point	119
Table 5-3 Measuring Results of Ambient Air Quality Baseline Data (ASP) for Fact	ory-2120
Table 5-4 Indoor Air Quality Measuring Results for MAOI-2	123
Table 5-5 Generator Stack Emission Measuring Results for MAOI-2	123
Table 5-6 Ambient Noise Level Measuring Results	125
Table 5-7 Workplace (Indoor) Noise Level Measuring Results for Factory-2	126
Table 5-8 Light Measurement Results	128
Table 5-9 Locations of Water Sampling Points	128
Table 5-10 Result of Tube Well Water Quality (GMES Laboratory)	129
Table 5-11 Result of Wastewater Quality (GMES Laboratory)	131
Table 5-12 Locations of Soil Sampling Point (SSP)	132
Table 5-13 Results of Soil Quality for Factory-2	133
Table 5-14 Annual Rainfall Data and Temperature at Mingaladon Township	134
Table 5-15 Geological Succession of the Yangon Region	135
Table 5-16 Population by National Ethnic Group	138
Table 5-17 Population by Foreigner	138
Table 5-18 Population by Sex	139
Table 5-19 Religious Groups of Ethnic in Mingaladon Township	139
Table 5-20 Land Use of Mingaladon Township	140
Table 5-21 Workforce of Mingaladon Township	140
Table 7-1 Procedure and Description of Waste Management in MAOI	149
Table 8-1 Environmental Monitoring Plan for the Operation and Decommissioning	Phases
	153
Table 8-2 Estimated Cost for the Basic Environmental Monitoring during the Oper	
Decommissioning Phases	
Table 8-3 Identification of Hazardous Chemicals	164

# Environmental Management Plan (EMP) Report for Factory-2 (Part-II) Myanmar Asia Optical International Company Limited

Table 9-1 Duties of the Emergency Management Team	169
Table 9-2 Duties of the Fire Emergency Management Team	175
Table 10-1 Firefighting Team	192
Table 10-2 Equipment Moving Team	192
Table 10-3 Security Team	192
Table 10-4 Search and Rescue Team	192
Table 10-5 Reporting Team	193
Table 10-6 Medicine List	196
Table 11-1 Excerpts from Suggestion of the Factory Employees	213
Table 11-2 Summary of Discussion in the Meeting	216
Table 11-3 Description of Suggestion Letter from the Meeting	216

## DOCUMENT CERTIFICATION AND DECLARATION

Green Myanmar Environmental Services Company Limited has prepared this Environmental Management Plan (EMP) report for Manufacturing of all kinds of Lens, Lens Units, Optical Apparatuses, Electronic Apparatuses, Self-focus Lens Array (SLA), Plastic Parts for Electronic Apparatuses and other Apparatuses on CMP Basis (Factory-2) project.

I, the undersigned, (Dierctor of Myanmar Asia Optical International Company Limited) as proponent of this project, certify that the particulars in this report are correct, true to the best of my knowledge and do hereby solemnly affirm to:

- Ensure the legal and other obligations are incorporated in designs, procedures and project controls,
- Communicate legal and other requirements to personnel and contractors accountable for compliance,
- Ensure all relevant legal and other requirements and associated documentation (e.g., licenses, permits, approval applications) are readily available on site to company personnel and consultants,
- Comply with all Myanmar laws, rules and regulations, including Clauses 14 and 15 of the Environmental Conservation Law (2012),
- Conduct a compliance audit at least annually and ensure there is a process in place to monitor on-going compliance with all legal and other requirements,
- Follow according to the Environmental Management Plan (EMP) and Environmental Monitoring Plan (EMoP),
- Submit the monitoring report prescribed in the schedule of the Environmental Management Plan to the Ministry every (6) month,
- Follow company's OHS policies,
- Implement CSR,
- Commit to minimize the impact of its activities on the environment during operation phase and decommissioning phase,

 Commit that the project will always comply fully with the commitments, mitigation measures, and plans in this EMP report.

Signature

Mr. Chen Han-Jung

Name

Director

Designation

Myanmar Asia Optical International Company Limited

Plot No. (C1, C2), Mingaladon Industrial Park,

Mingaladon Township, Yangon Region, Myanmar.

Tel: +959-519 5601

Email: wolfgang chen@asiaoptical.com.mm

Date: May 12 - 2022

#### COMMITMENT AND ACKNOWLEDGEMENT

An Environmental Management Plan (EMP) describes the environmental condition of a project, including potential impact, formulation of mitigation measures, and preparation of institutional requirements and environmental monitoring. This EMP report was prepared using information from the following sources:

- Review of selected literature, reports, and advisors,
- Meetings with several interested parties,
- The experience of the Environmental Team, and
- Other information solicited from baseline data and stakeholders.

We strongly commit

- the accuracy and completeness of the EMP; and
- ➤ the EMP has been prepared in strict compliance with the applicable laws including this Procedure.

The EMP team is grateful to the project proponent – **Myanmar Asia Optical International Company Limited** - for commissioning us to conduct this Environmental Management Plan (EMP) Report in respect of the proposed project.

We further acknowledge the support, either direct or indirect, from the various parties who assisted the EMP team towards the successful completion of this report.

Signature

Name

Designation

U Kyaw Soe Win

Managing Director

Green Myanmar Environmental Services Co., Ltd.

No. 115, Kanaung Min Thar Gyi Road,

Hlaing Thar Yar Industrial City, Industrial Zone (1),

Hlaing Thar Yar Township, Yangon Region, Myanmar

Tel: +959-897 978 296

Email: gmescompany@gmail.com, info@gmes-mm.com

Date: 12/5/2022

#### **ABBREVIATION**

AMP Ambient Air Quality Measuring Quality

Co., Ltd. Company Limited

CSR Corporate Social Responsibility

CITIES Convention on International Trade in Endangered Species of Wild

Fauna and Flora

CMP Contract, Manufacturing and Processing

CNC Computer Numerical Control

EIA Environmental Impact Assessment
ECC Environment Compliance Certificate
ECD Environmental Conservation Department

EMOP Environmental Monitoring Plan
EMP Environmental Management Plan
EMT Environmental Management Team

ERP Emergency Response Plan

FQC Final Quality Check

GAD General Administration Department

GHS Globally Harmonized System

GMES Green Myanmar Environmental Services

IEE Initial Environmental Examination
IPQC Import Process Quality Control

IQC Income Quality Check

HSE Health, Safety and Environmental

MAOI Myanmar Asia Optical International Company Limited

MIC Myanmar Investment Commission

MIP Myanmar Industrial Park

MOECAF Ministry of Environmental Conservation and Forestry

MONREC Ministry of Natural Resources and Environmental Conservation

MQC Middle Quality Check

NEQ(E)G National Environmental Quality (Emission) Guidelines

OHS Occupational Health and Safety

OQC Outgoing Quality Control

PPE Personal Protective Equipment

QC Quality Control
RA Risk Assessment
RO Reverse Osmosis

SOC Safety Orientation Course

# Environmental Management Plan (EMP) Report for Factory-2 (Part-II) Myanmar Asia Optical International Company Limited

SDS Safety Data Sheet
SLA Self-focus Lens Array
SWF Safe Work Procedures
TDS Total Dissolved Solids

UNFCCC United Nations Framework Convention on Climate Change

USA United States of America
USD United States Dollar

WCC Workplace Coordinating Committee

WHO World Health Organization
WSH Workplace Safety and Health
WWTP Wastewater Treatment Plant

**Units** 

Al Aluminum As Arsenic

dB (A) weighted system (the decibel values of sounds at low frequencies)

CH<sub>4</sub> Methane

CO Carbon Monoxide CO<sub>2</sub> Carbon Dioxide

m<sup>3</sup>/hr Cubic Meter per hour

dB Decibel

°C Degree Celsius

g gram(s)
gal Gallons

H<sub>2</sub>S Hydrogen Sulfide

hr Hour kg Kilogram

kVA Kilo Volt Ampere kWh Kilowatt-hour

1 Liter

μg/m<sup>3</sup> Micrograms per cubic meter

m Meter

m<sup>3</sup> cubic meter

mg/Nm<sup>3</sup> milligrams per cubic meter

Mn Manganese MW Megawatt NH<sub>3</sub> Ammonia

NO Nitrogen Oxide NO<sub>2</sub> Nitrogen Dioxide

# Environmental Management Plan (EMP) Report for Factory-2 (Part-II) Myanmar Asia Optical International Company Limited

 $egin{array}{ll} O_2 & Oxygen \\ O_3 & Ozone \\ Pcs & pieces \\ \end{array}$ 

ppbppmPart Per BillionppmPart Per MillionPMParticulate Matter

PM<sub>10</sub> Particulate Matter 10 Micrometer or Less in Diameter PM<sub>2.5</sub> Particulate Matter 2.5 Micrometer or Less in Diameter pH Power of Hydrogen, Hydrogen Ion Concentration

Qty Quantity

Sr. No. Serial Number

W Watt

## ၁။ အကျဉ်းချုပ်အစီရင်ခံစာ

#### ၁–၁။ နောက်ခံအကြောင်းအရာ

Myanmar Asia Optical International Company Limited (MAOI) သည် British Virgin Island ရှိ Asia Optical International Limited မှ (၉၉) ရာခိုင်နှုန်းနှင့် ဂျပန်နိုင်ငံမှ Mr. Yuzo Asano ၏ (၁) ရာခိုင်နှုန်း တို့ဖြင့် ရာနှုန်းပြည့်နိုင်ငံခြားရင်းနှီးမှုတစ်ခုဖြစ်ပြီး ကုမ္ပဏီမှတ်ပုံတင်နံပါတ် ၁၄၇၈၄၂၂၈ (၂၆.၃.၂၀၀၃) ဖြင့် မြန်မာနိုင်ငံတွင် မှတ်ပုံတင်ထားပါသည်။ MAOI တွင် စက်ရုံနှစ်ရုံဖြင့် လည်ပတ်နေပြီး စက်ရုံ–၁ တွင် မှန်ဘီလူး အမျိုးမျိုးထုတ်လုပ်နေပြီး စက်ရုံ–၂ တွင် ကင်မရာအတွက်ပလတ်စတစ်အစိတ်အပိုင်းများနှင့် ဆုံချက်စုအလင်း တန်းမှန်ဘီလူးချောင်း (Self–focus Lens Array – SLA) တို့ကို ထုတ်လုပ်လျက်ရှိပါသည်။

ဤပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ် (EMP) အစီရင်ခံစာသည် စက်ရုံ–၂ အတွက် ပြင်ဆင် ထားခြင်းဖြစ်ပြီး ၄င်းသည် အကွက်အမှတ် (စီ ၁၊ စီ ၂)၊ မင်္ဂလာဒုံစက်မှုဇုန်၊ မင်္ဂလာဒုံမြို့နယ်၊ ရန်ကုန်တိုင်း ဒေသကြီး၊ မြန်မာနိုင်ငံတွင် တည်ရှိပါသည်။

၂၀၂၀ ခုနှစ် ဖေဖော်ဝါရီလတွင် စိမ်းလန်းမြန်မာပတ်ဝန်းကျင်ဆိုင်ရာဝန်ဆောင်မှုကုမ္ပဏီလီမိတက် (GMES – Green Myanmar Environmental Services Company Limited) သို့ Myanmar Asia Optical International Company Limited (MAOI) မှ "လက်ခစားစနစ်ဖြင့် မှန်ဘီလူးများ၊ မှန်ဘီလူးယူနစ်များ၊ အလင်းနှင့်ဆိုင်သောစက်ကိရိယာများ၊ အီလက်ထရောနစ်စက်ကိရိယာများ၊ ဆုံချက်စုအလင်းတန်းမှန်ဘီလူး ချောင်း (SLA)၊ အီလက်ထရောနစ်ကိရိယာများနှင့်အခြားကိရိယာများတွင်အသုံးပြုသည့် ပလတ်စတစ်အစိတ် အပိုင်းများ ထုတ်လုပ်ခြင်းလုပ်ငန်း" အတွက် သယံဧာတနှင့် သဘာဝပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဝန်ကြီးဌာန၊ ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဦးစီးသို့တင်ပြရန် ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ် (EMP) အစီရင်ခံစာ ဆောင်ရွက်ရာတွင် အကြံဉာဏ်ဝန်ဆောင်မှုပေးရန် ကမ်းလှမ်းခဲ့ပါသည်။

#### ၁–၂။ လုပ်ငန်းလုပ်ကိုင်သူ၏အချက်အလက်များ

Oll	စီမံကိန်းအမည်	လက်ခစားစနစ်ဖြင့် မှန်ဘီလူးများ၊ မှန်ဘီလူးယူနစ်များ၊ အလင်းနှင့်ဆိုင်သော	
		စက်ကိရိယာများ၊ အီလက်ထရောနစ်စက်ကိရိယာများ၊ ဆုံချက်စုအလင်းတန်း	
		မှန်ဘီလူးချောင်း (SLA)၊ အီလက်ထရောနစ်ကိရိယာများနှင့် အခြားကိရိယာ	
		များတွင်အသုံးပြုသည့်ပလတ်စတစ်အစိတ်အပိုင်းများထုတ်လုပ်ခြင်းလုပ်ငန်း	
JII	စီမံကိန်းလုပ်ကိုင်သူ	Myanmar Asia Optical International (MAOI) Company Limited	
<b>SII</b>	စီမံကိန်းလိပ်စာ	အကွက်အမှတ် (စီ ၁၊ စီ ၂)၊ မင်္ဂလာဒုံစက်မှုဇုန်၊ မင်္ဂလာဒုံမြို့နယ်၊  ရန်ကုန်	
		တိုင်းဒေသကြီး၊ မြန်မာနိုင်ငံ	
911	ကုမ္ပဏီမှတ်ပုံတင်နံပါတ်	၁၄၇၈၄၂၂၂၈	
၅။	စတင်တည်ထောင်သော အချိန်	၂၆.၃.၂၀၀၃	
GII	စမ်းသပ်လည်ပတ်သည့်နေ့	၂၀၀၄ ခုနှစ် မတ်လ	
၇။	စီးပွားဖြစ်လည်ပတ်သည့်နေ့	၁.၇.၂၀၀၄	
ଶା	ရင်းနှီးမြှုပ်နှံမှုခွင့်ပြုသည့်ကာလ	(၄၅) နှစ်	
GII	လုပ်ငန်းအမျိုးအစား	ထုတ်လုပ်ခြင်းလုပ်ငန်း	

OOII	ရင်းနှီးမြှုပ်နှံမှုအမျိုးအစား	၁၀၀% နိုင်ငံခြားရင်းနှီးမြှုပ်နှံမှု		
	နိုင်ငံခြားမှယူလာသည့် မတည်	အမေရိကန်ဒေါ်လာ ၁၂.၈၈၀ သန်း		
	ငွေရင်း			
	စုစုပေါင်းရင်းနှီးမြှုပ်နှံမှုပမာဏ	အမေရိကန်ဒေါ်လာ ၂၃.၅၅၈ သန်း		
	အမေရိကန်ဒေါ်လာ	၄၅,၁၂၃ ရှယ်ယာ		
	ရှယ်ယာအမျိုးအစား	Ordinary (ရှယ်ယာတစ်စုလျှင် အမေရိကန်ဒေါ်လာ ၆,၀၀၀)		
ncc	ပထဝီဆိုင်ရာအချက်အလက်	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၇.၅၆"		
		အရှေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၉.၃၃"		
၁၂။	မြေအမျိုးအစား	စက်မှုမြေ		
၁၃။	မြေရယူပုံ	ငှားရမ်းမြေ		
၁၄။	မြေပိုင်ဆိုင်သူ	Mingaladon Industrial Park Co., Ltd.		
၁၅။	မြေငှားရမ်းသူ	Myanmar Asia optical International Co., Ltd. (MAOI)		
၁၆။	စက်ရုံဧရိယာ	၃၆,၆၂၂.၈၈ စတုရန်းမီတာ		
၁၇။	ပတ်ဝန်းကျင်အခြေအနေ	အရှေ့ဘက် Designtime Myanmar Co., Ltd.		
		အနောက်ဘက် Linda Fashion Myanmar		
		လက်ဝဲဘက် Myanmar Postarion Co., Ltd.		
		လက်ယာဘက် Myanmar DYC Shoes Factory		
၁၈။	ရေအရင်းအမြစ်	ရေတွင်း (၆ လက်မ x ၆၀၀ ပေ) ၂ တွင်း		
		MIP ရေပိုက်ခေါင်း ၁ ခု		
၁၉။	လျှပ်စစ်ဓာတ်အားရယူမှု	နိုင်ငံတော်ဓာတ်အားစနစ်		
Joil	လျှပ်စစ်ဓာတ်အားဖြန့်ဖြူးမှု	ထရန်စဖော်မာ (၁) ခု		
		မီးစက်		
		၁,၀၀၀ kVA ဒီဇယ်အင်ဂျင် (တစ်လုံး)		
		၁,၅၀၀ kVA ဒီဧယ်အင်ဂျင် (နှစ်လုံး)		
Joli	ကုန်ကြမ်းပစ္စည်းများ	💠 ပလတ်စတစ်ထုပ်ပိုးခြင်းလုပ်ငန်းအတွက် ကုန်ကြမ်းပစ္စည်းများ		
		➢ PE/PE Film		
		Transparent Acrylic Board		
		Anti-static Mat		
		Masking Tape		
		Black Sanding Pad		
		> Anti-static Curtain		
		Ultrasonic Generator		
		Blister Sprinkler		
		Adsorption Mold Gypsum Powder		
		> PET /PET Sheet		
		➤ Paper Box		
•	1	1		

		💠 ကင်မရာအတွက်ပလတ်စတစ်အစိတ်အပိုင်းများထုတ်လုပ်မှုအတွက် ကုန်	
		ကြမ်းပစ္စည်းများ	
		➤ Plastic Granule PC-GSH2020R2-979G	
		➤ Plastic Granule PC-LS3302-K24235	
		Plastic Granule PC-GSH2020LR-Y083	
		Plastic Granule PC-GF1210-BLK	
		≽ Box	
		➤ PE Plastic	
		➢ Blister Pack	
		> Dummy Plate	
		💠 ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်းထုတ်လုပ်မှုအတွက် ကုန်ကြမ်း	
		ပစ္စည်းများ	
		➤ Self–Focus Lens Array Rod	
		➤ Fiber Reinforced Plastic	
		➤ Sponge Pad	
		➤ Paper Pad	
		➤ Paper Box	
		➤ Paper Pallet	
		💠 ဓာတုပစ္စည်းများ	
		➤ Ethyl Alcohol	
		> Acetone	
		Rare Earth Polishing Powder	
		Lapping Emery	
		➤ Optical Adhesive A-01	
		Cutting Fluid	
		➤ G 17 Adhesive	
		Metal Polish	
JJII	ကုန်ကြမ်းတင်သွင်းသည့်နိုင်ငံ	တရုတ် (ဟောင်ကောင်) နှင့် ဂျပန်	
	များ		
7511	ထုတ်ကုန်ပစ္စည်းများ	ကင်မရာအတွက် ပလတ်စတစ်အစိတ်အပိုင်းများ	
		ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း (SLA)	
JSII	ကုန်ချောတင်ပို့သည့်နိုင်ငံများ	တရုတ် (ဟောင်ကောင်) နှင့် ဂျပန်	
၂၅။	ကုန်ချောထွက်ရှိမှုပမာဏ	ကင်မရာအတွက်ပလတ်စတစ်အစိတ်အပိုင်းများ–တစ်လလျှင် ၁,၂၅၁,၈၀၀ ခု	
		ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း – တစ်နှစ်လျှင်၂၅,၆၀၀,၀၀၀ ခု	
JGII	လုပ်သားအင်အား	နိုင်ငံခြားသားဝန်ထမ်း ၁၃ ဦး	
		ပြည်တွင်းဝန်ထမ်း ၁၆၅ ဦး	
		စုစုပေါင်း ၁၇၈ ဦး	

၂၇။	အလုပ်ချိန်	တစ်ရက်လျှင် အလုပ်လုပ်ချိန် ၈ နာရီ (ရုံးလုပ်ငန်းစီမံခန့်ခွဲမှုနှင့် စက်ရုံ)		
	အလုပ်လုပ်ရက်	သတ္တတစ်ပတ်လျှင် ၆ ရက်		
	အလုပ်လုပ်ချိန်	ရုံးလုပ်ငန်းစီမံခန့်ခွဲမှု		
		အဆိုင်း (၁) ဆိုင်း		
		ე:၃၀ a.m. ~ ၄:၃၀ լ	o.m. (တန်လာမှစနေ)	
		(ထမင်းစားနားချိန် -	· ၁၁:၃၀ a.m. ~ ၁၂:၃၀ p.m.	
		စက်ရုံလည်ပတ်ချိန်		
		အဆိုင်း (၂) ဆိုင်း (ေ	န့ဆိုင်းနှင့် ညဆိုင်း)	
			နေ့ဆိုင်း	ညဆိုင်း
		တနင်္လာမှစနေ	ე:၃0a.m.~ç:00 p.m.	ე:၃၀ p.m.~ς:00 a.m.
		ထမင်းစားနားချိန်	၁၁:၃၀ a.m.~၁၂:၀၀ p.m.	၁၁:၃၀ p.m.~၁၂:၀၀ a.m.
		အချိန်ပို	9:00 p.m.~9:20 p.m.	ς:00 a.m.~η:20 a.m.
၂။	ဒါရိုက်တာစာရင်း	အမည်	- Mr. Yuzo A	Asano
		နိုင်ငံသား	- ဂျပန်	
		နိုင်ငံကူးလက်မှတ်အ	မှတ် - TZ 118775	3
		ရာထူး	- မန်နေဂျင်း	ဒါရိုက်တာ
		အမည်	- Mr. Chen,	Han-Jung
		နိုင်ငံသား	- တရုတ်	
		ို နိုင်ငံကူးလက်မှတ်အ		5
		ရာထူး	- ဒါရိုက်တာ	
JGII	ဆက်သွယ်ရန်အသေးစိတ်	စီမံကိန်းလိပ်စာ	အကွက်အမှတ် (စီ ၁၊ စီ ၂	)၊ မင်္ဂလာဒုံစက်မှုဇုန်၊
			မင်္ဂလာဒုံမြို့နယ်၊ ရန်ကုန်	တိုင်းဒေသကြီး၊ မြန်မာနိုင်ငံ
		တယ်လီဖုန်းနံပါတ်	იც-ჟაი გჟςა	
		အီးမေးလ်	mao80@asiaoptical.co	m.mm,
			maoiimexp2@gmail.com	
5011	EMP အစီရင်ခံစာအပြင်ဆင်ရေး	အမည်	ဒေါ်မေချမ်းခိုင်	
	အတွက် ဆက်သွယ်ရန်ပုဂ္ဂိုလ်	ရာထူး	အုပ်စုမှူး (Admin Department, Import/Export	
			Section)	
		တယ်လီဖုန်းနံပါတ်	၀၉၄၂၀၀၉၂၂၈၁	
		အီးမေးလ်	maoiimexp4@gmail.co	<u>m</u>

# ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ် (EMP) အစီရင်ခံစာလေ့လာပြုစုသည့်အဖွဲ့ အစည်း

ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဦးစီးဌာန (ECD) ၏ကြားကာလကုမ္ပဏီ အကြံပေးမှတ်ပုံတင်လက်မှတ် အမှတ်စဉ် ၀၀၀၆ ရရှိထားသော စိမ်းလန်းမြန်မာပတ်ဝန်းကျင်ဆိုင်ရာဝန်ဆောင်မှုကုမ္ပဏီလီမိတက်သည် ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ် (EMP) အစီရင်ခံစာ လေ့လာပြုစုသည့်အဖွဲ့ အစည်းဖြစ်ပြီး အသေး စိတ်အချက်အလက်များကို အောက်ပါဖယားတွင် ဖော်ပြထားပါသည်။

# ဧယား ၁−၁ GMES ၏ EMP လေ့လာပြုစုရေးအဖွဲ့

စဉ်	လုပ်ငန်းတာဝန်	သတ်မှတ်တာဝန်	အမည်၊ ရာထူး၊ အဖွဲ့အစည်းနှင့် ကြားကာလအကြံပေးမှတ်ပုံတင်အမှတ်
IIC	အဖွဲ့ ခေါင်းဆောင်	<ul> <li>EMP ရေးသားမှုအတွက် အလုံးစုံ စီမံခန့်         ခွဲခြင်း</li> <li>လုပ်ငန်းအစီအစဉ်ချမှတ်ခြင်း</li> <li>နည်းပညာပိုင်း ဆွေးနွေးညှိနှိုင်းခြင်း</li> <li>အချက်အလက်စုဆောင်းခြင်းနှင့်ထုတ်         လုပ်မှုလုပ်ငန်းနည်းစဉ်လေ့လာခြင်း</li> <li>အများပြည်သူနှင့်တိုင်ပင်ဆွေးနွေးရန်         အစီအစဉ်ဆွဲခြင်း၊ ဦးစီးဦးဆောင်ပြုလုပ်         ခြင်း</li> <li>ရရှိလာသောဒေတာအချက်အလက်များ         ကို ခွဲခြမ်းစိတ်ဖြာခြင်း</li> <li>စိတ်ပါဝင်စားသူများနှင့်ညှိနှိုင်းဆောင်ရွက်</li> </ul>	Engr. ဦးကျော်စိုးဝင်း အုပ်ချုပ်မှုဒါရိုက်တာ စိမ်းလန်းမြန်မာပတ်ဝန်းကျင်ဆိုင်ရာ ဝန်ဆောင်မှုလုပ်ငန်းကုမ္ပဏီလီမိတက် ပတ်ဝန်းကျင်စီမံခန့်ခွဲမှုအတွေ့အကြုံရှိ သူ ကြားကာလအကြံပေးမှတ်ပုံတင် နံပါတ် – ၀၀၁၉
اال	နည်းပညာပိုင်းဆိုင်ရာ အကြံပေး	ခြင်း  EMP ပြင်ဆင်မှုအတွက် အကြံပေးခြင်း  နည်းပညာပိုင်းဆိုင်ရာအစည်းအဝေးများ နှင့်အလုပ်ရုံဆွေးနွေးပွဲများကိုအကြံပေး ခြင်း  EMP လုပ်ငန်းစဉ်များအား စောင့်ကြပ် ကြည့်ရှုခြင်း  လူထုတွေ့ဆုံပွဲများအတွက်အကြံပေးခြင်း  အရည်အသွေးစစ်ဆေးမှုဆိုင်ရာနည်း ပညာအကြံပေးခြင်း  အချက်အလက်များစုစည်းမှုနှင့်စိစစ်မှုဆိုင် ရာလုပ်ငန်းများအတွက် အကြံပေးခြင်း	ဒေါ်ကျော်ကျော်ဝင်း ဒါရိုက်တာ (ငြိမ်း) မြန်မာ့ရေနံဓာတုဗေဒလုပ်ငန်း၊ လျှပ်စစ်နှင့်စွမ်းအင်ဝန်ကြီးဌာန
SII	ပတ်ဝန်းကျင်ဆိုင်ရာ အကြံပေး	<ul> <li>EMP ပုံစံဒီဇိုင်းအကြံပေးခြင်း</li> <li>ပတ်ဝန်းကျင်စီမံခန့်ခွဲမှုအဖွဲ့ ၏သတ်မှတ် တာဝန်နှင့်လုပ်ပိုင်ခွင့်ကိုဖွံ့ဖြိုးတိုးတက်စေ ခြင်း</li> <li>ပတ်ဝန်းကျင်ဆိုင်ရာအချက်အလက်များ အပေါ် အကြံဉာဏ်ပေးခြင်း</li> <li>ကွင်းဆင်းအချက်အလက်ကောက်ယူရာ တွင် အကြံပေးခြင်း</li> <li>နည်းပညာနှင့်စပ်လျဉ်း၍ခွဲခြမ်းစိတ်ဖြာ မှုအတွက် တိုးတက်အဆင်ပြေစေခြင်း</li> <li>ပတ်ဝန်းကျင်စီမံခန့်ခွဲမှုအစီအစဉ်အား</li> </ul>	Engr. ဒေါ်ခင်ဆွေအေး ကထိက (ငြိမ်း)၊ ဓာတုအင်ဂျင်နီယာဌာန၊ ရန်ကုန်နည်းပညာတက္ကသိုလ်။ ကြားကာလအကြံပေးမှတ်ပုံတင် နံပါတ် – ၀၀၂၁

စဉ်	လုပ်ငန်းတာဝန်	သတ်မှတ်တာဝန်	အမည်၊ ရာထူး၊ အဖွဲ့အစည်းနှင့် ကြားကာလအကြံပေးမှတ်ပုံတင်အမှတ်
		ပိုမိုကောင်းမွန်စေခြင်း	
ŞII	လေထုအရည်အသွေး စီမံခန့်ခွဲမှုအကြံပေး	<ul> <li>လေထုအရည်အသွေးအတွက်ကွင်းဆင်း အချက်အလက်ကောက်ယူရာတွင်အကြံ ပေးခြင်း</li> <li>လေထုအရည်အသွေးထိန်းသိမ်းမှု အတွက် အကြံပေးခြင်း</li> <li>လေထုညစ်ညမ်းမှုပမာဏလျော့နည်းစေ ရန်ဆောင်ရွက်မှုအား အကြံဉာဏ်ပေးခြင်း ကိန်းဂဏန်းအချက်အလက်များကို ခွဲခြမ်း စိတ်ဖြာ၍ ပုံစံထုတ်ခြင်း</li> <li>အစီရင်ခံစာရေးသားရန်အကြံဉာဏ်ပေး ခြင်း</li> </ul>	Engr. ဦးစိန်သောင်းဦး ဥက္ကဋ္ဌ စိမ်းလန်းမြန်မာပတ်ဝန်းကျင်ဆိုင်ရာ ဝန်ဆောင်မှုလုပ်ငန်းကုမ္ပဏီလီမိတက် ကြားကာလအကြံပေးမှတ်ပုံတင် နံပါတ် – ၀၀၂၃
၅။	စွန့်ပစ်ရည်စီမံခန့်ခွဲမှု ကျွမ်းကျင်အကြံပေး	<ul> <li>စီမံကိန်းနှင့်မြူနီစီပယ်ဆိုင်ရာစွန့်ပစ်ရည်</li> <li>အချက်အလက်များ ကွင်းဆင်းကောက်ယူ ရန် အကြံပေးခြင်း</li> <li>ဓာတ်ခွဲနည်းပညာအကြံပေးဦးဆောင်ခြင်း</li> <li>ကိန်းဂဏန်းအချက်အလက်များကိုစီစဉ်</li> <li>ခြင်း၊တွက်ချက်ခြင်း၊ကောက်ချက်ချခြင်း၊ ပုံစံပြုဆန်းသစ်ခြင်းများတွင်အကြံပေး</li> <li>ခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်မှုများကို အစီရင်ခံစာရေး သားပြုစုရာတွင် အကြံပေးခြင်း</li> </ul>	Engr. ဒေါ်တင်မေစိုး ပါမောက္ခ (ငြိမ်း)၊ ဓာတုအင်ဂျင်နီယာဌာန၊ မန္တလေးနည်းပညာတက္ကသိုလ်။ ပတ်ဝန်းကျင်အဆိပ်အတောက်နှင့် ညစ်ညမ်းမှုထိန်းသိမ်းရေးအတွေ့ အကြုံ ရှိ ကျွမ်းကျင်ပညာရှင် ကြားကာလအကြံပေးမှတ်ပုံတင် နံပါတ် – ၀၀၂၈
GII	ဓာတ်ခွဲခန်းရလဒ်ဆိုင်ရာ အကြံပေး	<ul> <li>ရေနှင့်စွန့် ပစ်ရည်နမူနာများကောက်ယူ</li> <li>ခြင်း၊ ကိုင်တွယ်ခြင်းနှင့် စမ်းသပ်ခြင်းများ တွင် အကြံပေးခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်မှုများအတွက်ညွှန်ကြား ခြင်း</li> <li>ပတ်ဝန်းကျင်ရေးရာဓာတ်ခွဲရလဒ်များကို စစ်ဆေးခြင်း</li> <li>ဓာတ်ခွဲရလဒ်များကိုနှိုင်းယှဉ်အတည်ပြု ခြင်း</li> </ul>	ဦးမျိုးမြင့် စက်ရုံမှူး (ငြိမ်း)၊ အမှတ် (၁) စက်မှုဝန်ကြီးဌာန။ ကြားကာလအကြံပေးမှတ်ပုံတင် နံပါတ် – ၀၀၂၆
ମ୍ବା	ပတ်ဝန်းကျင်ဆိုင်ရာ အရည်အသွေး စီမံခန့်ခွဲ မှုအကြံပေး	<ul> <li>ပတ်ဝန်းကျင်ဆိုင်ရာလေထုနှင့်ရေထု</li> <li>အရည်အသွေးအတွက် နမူနာကောက်ယူ</li> <li>ရာတွင် လမ်းညွှန်မှုပြုခြင်း၊ ပြင်ဆင်ပေး</li> <li>ခြင်း</li> <li>နမူနာကောက်ယူခြင်းများကိုစောင့်ကြပ်</li> </ul>	ဒေါ်ခင်ရွှေဌေး ကထိက (ငြိမ်း)၊ ဓာတုအင်ဂျင်နီယာဌာန၊ ရန်ကုန်နည်းပညာတက္ကသိုလ်။ ပတ်ဝန်းကျင်ဆိုင်ရာအင်ဂျင်နီယာ

စဉ်	လုပ်ငန်းတာဝန်	သတ်မှတ်တာဝန်	အမည်၊ ရာထူး၊ အဖွဲ့အစည်းနှင့် ကြားကာလအကြံပေးမှတ်ပုံတင်အမှတ်
		ကြည့်ရှုခြင်း နမူနာကောက်ယူမှုကိုစာရင်းသွင်းခြင်း၊စစ်	ကြားကာလအကြံပေးမှတ်ပုံတင်
		ဆေးခြင်း • ပတ်ဝန်းကျင်အခြေခံအချက်အလက်များ	နံပါတ် – ၀၀၂၂
		အတွက်အစီရင်ခံစာပြင်ဆင်ခြင်းကို ဦး	
		ဆောင်အကြံပေးခြင်း	
ดแ	လူမှုပတ်ဝန်းကျင်ထိခိုက်	<ul> <li>နည်းပညာဆိုင်ရာအစည်းအဝေးများညှိ</li> </ul>	ဦးခင်အောင်
	မှုကွင်းဆင်းလေ့လာရေး	နှိုင်းဆွေးနွေးခြင်းနှင့် မှတ်တမ်းတင်ထား	လူမှုပတ်ဝန်းကျင် ကျွမ်းကျင်ပညာရှင်
	ခေါင်းဆောင်	ခြင်း • အချက်အလက်များရာဖေ့ခြင်းနှင် ဒေသ	စိမ်းလန်းမြန်မာပတ်ဝန်းကျင်ဆိုင်ရာ ဝန်ဆောင်မှုလုပ်ငန်းကုမ္ပဏီလီမိတက်
		<ul> <li>အချက်အလက်များရှာဖွေခြင်းနှင့် ဒေသ</li> <li>ဆိုင်ရာအချက်အလက်များကိုစုဆောင်း</li> </ul>	ဝန်ဆောင်မှုလုပ်ငန်းကုမ္ပဏ်လမတ်က
		ျော်   ခြင်း	ကြားကာလအကြံပေးမှတ်ပုံတင်
		<ul> <li>သက်ဆိုင်ရာအာဏာပိုင်၊ဒေသခံများနှင့်</li> </ul>	နံပါတ် – ၀၀၂၅
		ဆွေးနွေးတိုင်ပင်မှုများ ပြုလုပ်ခြင်း	
GII	ကွင်းဆင်းလေ့လာ	■ ပတ်ဝန်းကျင်ဆိုင်ရာလေ့လာမှုများ	ဦးကြည်ဟန်ဘို
	ဆောင်ရွက်သည့်အဖွဲ့ ကြီးကြပ်ရေးခေါင်း	အတွက် Checklist ပြင်ဆင်ခြင်း အကြိုကွင်းဆင်းလေ့လာစစ်ဆေးခြင်း	B.E (Aerospace Fuel and Propellant Engineer)
	ကြးကြပ်ရေးခေါင်း ဆောင်	- အကြုက္မွင်းဆင်းငေ့ငံ့လာစစ်ဆေးခြင်း ■ ကွင်းဆင်းလေ့လာမှုကို ကြီးကြပ်ခြင်း	Liigineer
		<ul><li>အစီရင်ခံစာစစ်ဆေးခြင်းနှင့်ပြင်ဆင်ခြင်း</li></ul>	
OOII	ပတ်ဝန်းကျင်ဆိုင်ရာ	<ul> <li>အချက်အလက်များစုဆောင်းခြင်း</li> </ul>	ဒေါ်အေးသူဇာဟိန်း
	ကျွမ်းကျင်ပညာရှင်များ	<ul><li>စာရွက်စာတမ်းအထောက်အထားများ စစ်</li><li>ဆေးပြုစုခြင်း</li></ul>	B.E (Chemical)
		<ul> <li>စီမံကိန်းလုပ်ငန်းများအားလေ့လာခြင်း</li> </ul>	ဒေါ်နှင်းထက်ထက်လှိုင်
		<ul> <li>သက်ရောက်မှုများကိုရှာဖွေဖော်ထုတ်ခြင်း</li> <li>နှင့် စီမံခန့်ခွဲမှုစနစ် ပြင်ဆင်ရေးဆွဲခြင်း</li> </ul>	B.E (Port and Harbor)
			ဒေါ်ဝေဝေမွန်
			B.E (Port and Harbor)
			ခေါ်နိုနိုနင်းနနွေး
			B.E (Port and Harbor)
SOII	ပတ်ဝန်းကျင်ဆိုင်ရာ	<ul> <li>ပတ်ဝန်းကျင်ဆိုင်ရာအခြေခံအချက်</li> </ul>	ဦးပြည့်ဖြိုးကျော်
	အရည်အသွေးစောင့်	အလက်များ ကောက်ယူခြင်း	B.Sc (Forestry)
	ကြည့်တိုင်းတာရေးအဖွဲ့	<ul> <li>အချက်အလက်များအားဆန်းစစ်တွက်</li> <li>ချက်ခြင်း</li> </ul>	(အဖွဲ့ ခေါင်းဆောင်)
		■ အခြေခံအချက်အလက်ကောက်ယူသော	   ဦးမျိုးသက်နောင်
		မြေပုံများထုတ်ခြင်း	B.E (Aerospace Fuel and Propellant

စဉ်	လုပ်ငန်းတာဝန်	သတ်မှတ်တာဝန်	အမည်၊ ရာထူး၊ အဖွဲ့အစည်းနှင့် ကြားကာလအကြံပေးမှတ်ပုံတင်အမှတ်
		<ul> <li>အခြေခံအချက်အလက်ဆိုင်ရာအစီရင်ခံ</li> <li>စာ ပြင်ဆင်ပြုစုခြင်း</li> </ul>	Engineer) (လက်ထောက်အဖွဲ့ ခေါင်းဆောင်)
			ဦးအောင်ကိုမင်း B.E (Chemical) (တိုင်းတာရေးကျွမ်းကျင်ပညာရှင်)
			ဦးသီဟဇော် (လက်ထောက်တိုင်းတာရေး ကျွမ်းကျင် ပညာရှင်)
၁၂။	လူထုဆက်ဆံရေး	<ul> <li>ဌာနဆိုင်ရာတာဝန်ရှိသူများနှင့်ဆွေးနွေး မှုများတွင် ပါဝင်ကူညီခြင်း</li> <li>စာရွက်စာတမ်းများပြင်ဆင်ခြင်းနှင့် လိုက် လံဖိတ်ကြားခြင်း</li> <li>လူထုတွေ့ဆုံမှုများအတွက်လိုအပ်သော စာရွက်စာတမ်းများ ပြင်ဆင်ခြင်း</li> <li>လူထုတွေ့ဆုံမှုများတွင် အကြံပြုချက်များ ရယူခြင်း</li> </ul>	ဦးအောင်ကျော်သန်း B.E (Chemical)
၁၃။	ဓာတ်ခွဲစမ်းသပ်မှုကျွမ်း ကျင်ပညာရှင်များ	<ul> <li>ရေနှင့်စွန့်ပစ်ရည်နမူနာများကောက်ယူ         ရန် ကြိုတင်ပြင်ဆင်ခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်နိုင်ရေးအတွက်ကြိုတင်         ပြင်ဆင်ခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်ခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်ခြင်း</li> <li>ဓာတ်ခွဲစမ်းသပ်ခြင်းမှရရှိလာသောရလဒ်         များကို စုစည်းတင်ပြခြင်း</li> </ul>	ဒေါ်ချယ်ရီသွင် B.E (Chemical) ဘေတ်ခွဲခန်းမန်နေဂျာ ဦးသက်မင်းပိုင် B.E (Chemical) ဘတ်ခွဲခန်းပညာရှင်

#### ၁–၃။ မူဝါဒ၊ ဥပဒေနှင့်အဖွဲ့ အစည်းဆိုင်ရာ မူဘောင်

ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ်အစီရင်ခံစာ၏အခန်း(၃)သည် မူဝါဒ၊ဥပဒေနှင့်အဖွဲ့အစည်း ဆိုင်ရာမူဘောင်ဖြစ်ပြီး ယင်းတွင်ပါဝင်မှုများမှာ

- ≽ နောက်ခံ
- 😕 မူဝါဒရေးရာ
- ပတ်ဝန်းကျင်ဆန်းစစ်ခြင်းအတွက် မြန်မာနိုင်ငံမူဘောင်များ
   အသေးစိတ်မှာ
  - အမျိုးသားပတ်ဝန်းကျင်ဆိုင်ရာမြန်မာမူဝါဒ (၂၀၁၉)
  - မြန်မာနိုင်ငံအစီအစဉ် ၂၁ (၁၉၉၇)

- အမျိုးသားစဉ်ဆက်မပြတ်ဖွံ့ဖြိုးတိုးတက်ရေးဗျူဟာ (၂၀၀၉)
- ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဥပဒေ (၂၀၁၂)
- ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးနည်းဥပဒေ (၂၀၁၄)
- ပတ်ဝန်းကျင်ထိခိုက်မှုဆန်းစစ်ခြင်းလုပ်ထုံးလုပ်နည်း (၂၀၁၅)
- အမျိုးသားပတ်ဝန်းကျင်ဆိုင်ရာအရည်အသွေး(ထုတ်လွှတ်မှု)လမ်းညွှန်ချက် (၂၀၁၅)

#### 🗲 မြန်မာနိုင်ငံ၏ပတ်ဝန်းကျင်နှင့်သက်ဆိုင်သော ဥပဒေနှင့်နည်းဥပဒေများ

အုပ်ချုပ်ရေးကဏ္ဍနှင့်သက်ဆိုင်ခြင်း	<del>ર</del>
စီးပွားရေး/အဆောက်အအုံ/အုပ်ချုပ်ရေးနှင့်သက်ဆိုင်ခြင်း	<del>ર</del>
သဘာဝပတ်ဝန်းကျင်ထိန်းသိမ်းနှင့်သက်ဆိုင်ခြင်း	၅ ခု
ယဉ်ကျေးမှုအမွေအနှစ်နှင့်သက်ဆိုင်ခြင်း	၁ ခု
သစ်တော/ဇီဝမျိုးစုံ/စိုက်ပျိုးရေးနှင့်သက်ဆိုင်ခြင်း	<b>9</b>
မြေယာစီမံခန့်ခွဲမှုနှင့်သက်ဆိုင်ခြင်း	<b>9</b>
အရေးပေါ်/ဘေးအန္တရာယ်နှင့်သက်ဆိုင်ခြင်း	၂ခု
ဘဏ္ဍာရေးနှင့်အခွန်ကဏ္ဍနှင့်သက်ဆိုင်ခြင်း	<b>२</b>
အမျိုးသားစီမံကိန်းနှင့်စီးပွားရေးဖွံ့ဖြိုးတိုးတက်မှု နှင့်သက်ဆိုင်ခြင်း	၁ ခု
စက်မှုလုပ်ငန်းနှင့်သက်ဆိုင်ခြင်း	၆ ခု
ပြည်သူ့ကျန်းမာရေးနှင့်သက်ဆိုင်ခြင်း	<b>9</b>
သယ်ယူပို့ဆောင်ရေးနှင့်သက်ဆိုင်ခြင်း	၁ ခု
လုပ်သားကဏ္ဍနှင့်သက်ဆိုင်ခြင်း	<b>၉</b> ခုတို့ကို

ဖော်ပြထားပါသည်။


#### > အပြည်ပြည်ဆိုင်ရာကွန်ဗင်းရှင်းများ၊ စာချုပ်များနှင့် သဘောတူညီချက်များ ကွန်ဗင်းရှင်းများ၊ စာချုပ်များနှင့် သဘောတူညီချက်များ စုစုပေါင်း (၁၂) ခုကို တင်ပြထား ပါသည်။

- 🕨 စီမံကိန်း၏ပတ်ဝန်းကျင်နှင့်သက်ဆိုင်သောစံနှုန်းများနှင့်လမ်းညွှန်ချက်များ
  - လေထုအရည်အသွေး
  - ရေထုအရည်အသွေး
  - ဆူညံသံ
  - အလင်းရောင်

#### ၁–၄။ စီမံကိန်းအကြောင်းအရာဖော်ပြချက်


MAOI တွင်ထုတ်လုပ်သည့်ကုန်ပစ္စည်း (၃) မျိုးရှိပြီး မှန်ဘီလူးအမျိုးမျိုး၊ ကင်မရာအတွက် ပလတ် စတစ်အစိတ်အပိုင်းများနှင့် ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း (SLA) တို့ဖြစ်ပါသည်။ ယင်းတို့အနက် မှန်ဘီလူးအမျိုးမျိုးအတွက် ပလတ်စတစ်ဘူးများအပါအဝင် ကင်မရာအတွက် ပလတ်စတစ်အစိတ်အပိုင်းများ နှင့် ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်းများကို စက်ရုံ–၂ တွင် ထုတ်လုပ်ပါသည်။ MAOI–2 တွင် ထိုကုန်ထုတ်လုပ်မှုလုပ်ငန်းစဉ်များ၏လုပ်ငန်းစဉ်အဆင့်များကို ယေဘုယျအားဖြင့် အောက်ပါအတိုင်းဖော်ပြထားပါသည်။

၁–၄–၁။ မှန်ဘီလူးအမျိုးမျိုးအတွက် ပလတ်စတစ်ဘူးများ (ပလတ်စတစ်ပုံသွင်းခြင်း)

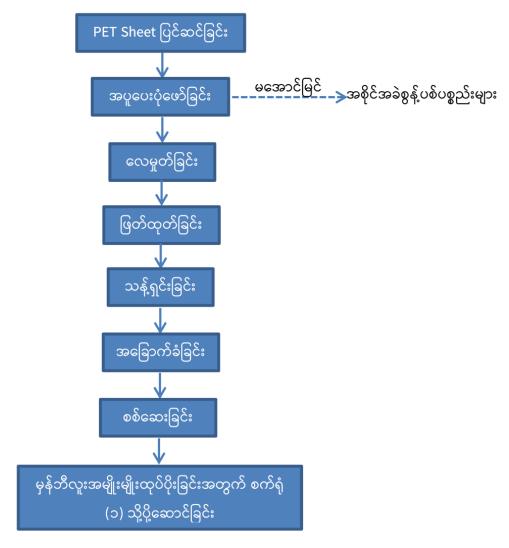


ပုံ ၁–၁ မှန်ဘီလူးအမျိုးမျိုးအတွက်ပလတ်စတစ်ဘူးများ ထုတ်လုပ်မှုလုပ်ငန်းစဉ်အဆင့်ဆင့်

#### ၁–၄–၂။ ကင်မရာအတွက် ပလတ်စတစ်အစိတ်အပိုင်းများ (ပလတ်စတစ်ပုံသွင်းခြင်း)

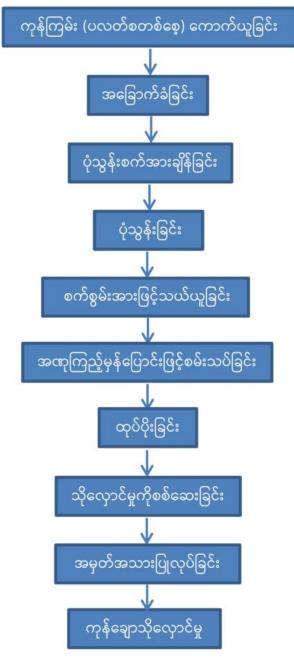

ပုံ ၁–၂ ကင်မရာအတွက် ပလတ်စတစ်အစိတ်အပိုင်းများ ထုတ်လုပ်မှုလုပ်ငန်းစဉ်အဆင့်ဆင့်

#### ၁–၄–၃။ ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း (SLA)

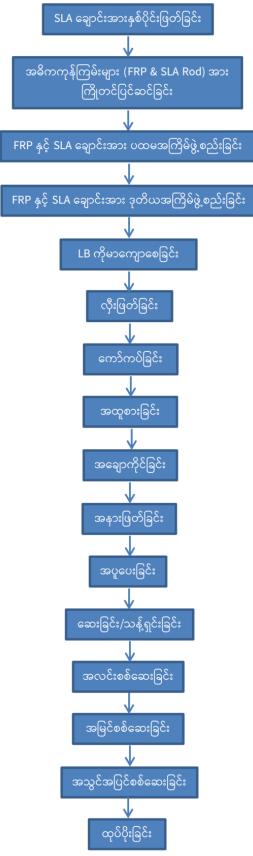

ပုံ ၁–၃ ဆုံချက်စုအလင်းတန်းမှန်ဘီလူးချောင်း ထုတ်လုပ်မှုလုပ်ငန်းစဉ်အဆင့်ဆင့်

#### ၁–၅။ လက်ရှိသဘာဝပတ်ဝန်းကျင်နှင့်လူမှုရေးဆိုင်ရာအခြေအနေဖော်ပြချက်များ

ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ်အစီရင်ခံစာရေးသားပြုစုခြင်းအတွက် စီမံကိန်းနှင့်သက်ဆိုင် သော လက်ရှိသဘာဝပတ်ဝန်းကျင်နှင့် လူမှုရေးဆိုင်ရာအခြေအနေများကိုဖော်ပြရန် အချက်အလက်များစု ဆောင်းရာတွင် ချဉ်းကပ်မှုနည်းလမ်း (၂) သွယ်ဖြင့် စုဆောင်းခဲ့ပါသည်။

- (၁) မူလအခြေခံအချက်အလက်များ (Primary Data) စုဆောင်းခြင်းနှင့် လေ့လာဆန်းစစ်ခြင်း
- (၂) ပြုစုပြီးအချက်အလက်များ (Secondary Data) စုဆောင်းခြင်းနှင့် လေ့လာဆန်းစစ်ခြင်း

မူလအခြေခံအချက်အလက်(Primary Data)များ စုဆောင်းခြင်းနှင့်လေ့လာဆန်းစစ်ခြင်း – ပတ်ဝန်းကျင်ဆိုင် ရာစီမံခန့်ခွဲမှုအစီအစဉ်တွင် အခြေခံအချက်အလက်များ (baseline data) စုဆောင်းရခြင်း၏ရည်ရွယ်ချက်မှာ လက်ရှိပတ်ဝန်းကျင်၏အခြေအနေအရပ်ရပ်ကို မူလအခြေခံအချက်အလက်များအဖြစ် စုဆောင်းထားရန်ဖြစ် သည်။ ချဉ်းကပ်မှုနည်းလမ်းကို "Myanmar Asia Optical International (MAOI) Company Limited" စီမံ ကိန်းအတွက် ပတ်ဝန်းကျင်ဆိုင်ရာအရည်အသွေးညွှန်းကိန်းများ၏အခြေခံအချက်အလက်များကို ဆန်းစစ်ရန် ရည်ရွယ်ထားပါသည်။ ပတ်ဝန်းကျင်ဆိုင်ရာအခြေခံအချက်အလက်ပါရာမီတာများကိုအဆိုပြုစီမံကိန်းအတွက် သတ်မှတ်ထားသော လမ်းညွှန်ချက်များအတိုင်း သတ်မှတ်ပါသည်။

လေအရည်အသွေး၊ အလင်းရောင်၊ ဆူညံသံအဆင့်နှင့် တုန်ခါမှုစသည့် ပတ်ဝန်းကျင်ဆိုင်ရာအခြေခံ အချက်အလက်များ (primary data)ကို ပစ္စည်းကိရိယာများဖြင့်တိုင်းတာပြီး ရေအရည်အသွေးနှင့် မြေအရည် အသွေးတို့အတွက် နမူနာများကိုကောက်ယူ၍ GMES ဓာတ်ခွဲခန်းနှင့် စိမ်းလန်းအမိမြေဖွံ့ဖြိုးတိုးတက်ရေး အသင်း၏ ပတ်ဝန်းကျင်ရေးရာဓာတ်ခွဲခန်း (ALARM ecological laboratory) တို့တွင် စမ်းသပ်စစ်ဆေးခဲ့ပါ သည်။ ဓာတ်ခွဲရလဒ်များကို အခန်း (၅) တွင် ဖော်ပြထားပြီး နောက်ဆက်တွဲတွင်လည်း ဖော်ပြထားပါသည်။

ပတ်ဝန်းကျင်ဆိုင်ရာလေအရည်အသွေး၊ လုပ်ငန်းခွင်လေအရည်အသွေး၊ အလင်းရောင်၊ ဆူညံသံ အဆင့်၊ ရေအရည်အသွေးနှင့်မြေအရည်အသွေးများနမူနာကောက်ယူခြင်းနှင့်လေ့လာဆန်းစစ်ခြင်း၊ နေရာရွေး ချယ်ခြင်းအတွက် လိုအပ်သောအကြောင်းအရာများကို GMES မှ ပြုလုပ်ပါသည်။

ပြုစုပြီးအချက်အလက်များ(Secondary Data)စုဆောင်းခြင်းနှင့် လေ့လာဆန်းစစ်ခြင်း - လူမှုစီးပွားဆိုင်ရာ အခြေအနေများ၊ ရုပ်ပိုင်းဆိုင်ရာ၊ ဇီဝဆိုင်ရာပတ်ဝန်းကျင်နှင့် ရာသီဥတုအချက်အလက်စသည်တို့ကို သက်ဆိုင် ရာဝက်ဘ်ဆိုဒ်များမှ စုဆောင်းပြီး EMP လေ့လာရေးအဖွဲ့မှ လေ့လာသုံးသပ်ပါသည်။ မင်္ဂလာဒုံမြို့နယ်၏ ဒေသဆိုင်ရာအချက်အလက်များကို ၂၀၂၀ ခုနှစ်တွင်ထုတ်ဝေထားသော အထွေထွေအုပ်ချုပ်ရေးဦးစီးဌာန၏ ဒေသဆိုင်ရာအချက်အလက်များလက်စွဲစာအုပ်မှ ရယူပါသည်

၁–၅–၁။ ပတ်ဝန်းကျင်ဆိုင်ရာအခြေခံအချက်အလက်များ (မူလအခြေခံအချက်အလက်များ)

#### (က) လေထုအရည်အသွေး

လေထုအရည်အသွေးကို စီမံကိန်းဧရိယာတွင် အဓိကအဆုံးအဖြတ်ပေးနိုင်သောနေရာ/ ထိ လွယ်ရှလွယ်သောနေရာများတွင် တိုင်းတာခဲ့ပါသည်။

- ၁) ပတ်ဝန်းကျင်လေထုကို နေရာတစ်နေရာတွင်လည်းကောင်း၊
- ၂) လုပ်ငန်းခွင်လေထုကို (၁၇) နေရာတွင်လည်းကောင်း၊

- ၃) ဒီဇယ်မီးစက်များ၏ခေါင်းတိုင်တွင်လည်းကောင်း တိုင်းတာခဲ့ပါသည်။
- ၁) ပတ်ဝန်းကျင်လေထုအရည်အသွေး ပတ်ဝန်းကျင်လေထုအရည်အသွေးကို အပိုင်းသုံးပိုင်းဖြင့် တင်ပြထားပါသည်။

# 💠 လေထုအရည်အသွေးအတွက် တိုင်းတာသည့်ပါရာမီတာများ

စဉ်	ပါရာမီတာများ	ခွဲခြမ်းစိတ်ဖြာခြင်းနည်းလမ်းများ	
Э	ဆာလဖာဒိုင်အောက်ဆိုဒ် ( $SO_2$ )	အီလက်ထရိုကင်မီကယ်ဆင်ဆာ	
J	နိုက်တြိုဂျင်ဒိုင်အောက်ဆိုဒ် ( $NO_2$ )	အီလက်ထရိုကင်မီကယ်ဆင်ဆာ	
5	ကာဗွန်ဒိုင်အောက်ဆိုဒ် (CO₂)	NDIR (optional sensor)	
9	ကာဗွန်မိုနောက်ဆိုဒ် (CO)	အီလက်ထရိုကင်မီကယ်ဆင်ဆာ	
၅	ဟိုက်ဒရိုဂျင်ဆာလဖိုဒ် (H₂S)	အီလက်ထရိုကင်မီကယ်ဆင်ဆာ	
G	သေးငယ်သောအမှုန်အမွှား (PM <sub>2.5</sub> )	Infrared light scattering	
૧	သေးငယ်သောအမှုန်အမွှား (PM <sub>10</sub> )	Infrared light scattering	

စီမံကိန်းဧရိယာရှိပတ်ဝန်းကျင်လေထုအရည်အသွေးကို အမှတ်နေရာတစ်ခုတည်း တွင် ၂၄ နာရီဆက်တိုက် တိုင်းတာခဲ့ပါသည်။

#### 💠 လေထုအရည်အသွေးတိုင်းတာခဲ့သည့်နေရာဖော်ပြချက်

စဉ်	တိုင်းတာသည့်နေရာ	ပထဝီဆိုင်ရာနေရာဖော်ပြချက်	တည်နေရာ
Э	AMP	မြောက်လတ္တီတွဒ် ၁၆°၅၆'၂၉.၀၉"	စက်ရုံ–၂၏ရုံးခန်း
		အရှေ့လောင်ဂျီတွဒ် ၉၆°၀၉'၂၃.၈၅"	ဝင်ပေါက်အနီး

AMP = Ambient Air Quality Measuring Point



ပုံ ၁–၄ ပတ်ဝန်းကျင်ဆိုင်ရာလေထုအရည်အသွေးတိုင်းတာသည့်နေရာပြပုံ



ပုံ ၁–၅ ပတ်ဝန်းကျင်လေထုအရည်အသွေးတိုင်းတာနေပုံ

### ပတ်ဝန်းကျင်လေထုအရည်အသွေးတိုင်းတာမှုရလဒ်များ (AMP)

စဉ်	ပါရာမီတာများ	ယူနစ်	Analysis Values		အမျိုးသားပတ်ဝန်းကျင် ဆိုင်ရာ အရည်အသွေး (ထုတ်လုပ်မှု) လမ်းညွှန်ချက်		မှတ်ချက်
			ရလဒ် တန်ဖိုး	ပျမ်းမျှ ကြာချိန်	Guideline တန်ဖိုး	ပျမ်းမျှ ကြာချိန်	
Э	နိုက်တြိုဂျင်ခိုင်အောက် ဆိုဒ်	µg/m³	<u> </u> გე.0၅	၂၄ နာရီ	Joo	၁ န၁ရီ	၁၀/၂/၂၀၂၀ ၂၂:၃၂-၂၃:၃၁ (Peak Hour)
J	ဆာလဖာဒိုင်အောက် ဆိုဒ်	µg/m³	0	၂၄ နာရီ	JO	၂၄ န၁ရီ	-
5	သေးငယ်သောအမှုန် အမွှား(PM <sub>10</sub> )	µg/m³	၁၀၂.၀၇	၂၄ န၁ရီ	ეი	၂၄ န၁ရီ	-
9	သေးငယ်သောအမှုန် အမွှား(PM <sub>2.5</sub> )	µg/m³	હિ <sub>ઉ</sub> .၂၇	၂၄ နာရီ	JO	၂၄ န၁ရီ	-
၅	အမိုးနီးယား	ppm	ം.വ്	၂၄ န၁ရီ	NG	-	-
G	ကာဗွန်ဒိုင်အောက်ဆိုဒ်	ppm	ენე.ცე	၂၄ န၁ရီ	NG	-	-
7	ကာဗွန်မိုနောက်ဆိုဒ်	ppm	0.26	၂၄ န၁ရီ	NG	-	-
െ	ဟိုက်ဒရိုဂျင်ဆာလဖိုဒ်	ppb	၁.၁၃	၂၄ န၁ရီ	NG	-	-
G	မီသိန်း	ppm	0	၂၄ န၁ရီ	NG	-	-
00	Relative Humidity	%	ეე.იე	၂၄ န၁ရီ	NG	-	-
၁၁	အပူချိန်	°C	၂၉.၂၀	၂၄ န၁ရီ	NG	-	-

အထက်ပါဇယားများအရ တိုင်းတာရရှိသည့်ရလဒ်များတွင် အမှုန်အမွှားများ ( $PM_{10}$  နှင့်  $PM_{2.5}$ ) သည် အမျိုးသားပတ်ဝန်းကျင်ဆိုင်ရာအရည်အသွေး (ထုတ်လုပ်မှု) လမ်းညွှန်ချက်စံနှုန်းများ ထက်မြင့်မားနေပြီး ဤသို့ဖြစ်ရခြင်းမှာ လေတိုင်းတာသည့်နေရာအနီးတစ်ဝိုက်တွင် ယာဉ်များနှင့်လူ

များ လှုပ်ရှားသွားလာနေခြင်းကြောင့်ဖြစ်သည်။ ကျန်ပါရာမီတာများသည် အမျိုးသားပတ်ဝန်းကျင် ဆိုင်ရာအရည်အသွေး (ထုတ်လုပ်မှု) လမ်းညွှန်ချက်စံနှုန်းများအတွင်းတွင်ရှိကြောင်း တွေ့ရပါသည်။

# ၂) လုပ်ငန်းခွင်လေထုအရည်အသွေး လုပ်ငန်းခွင်လေထုအရည်အသွေးကို အပိုင်းနှစ်ပိုင်းဖြင့် တင်ပြထားပါသည်။

### 💠 လုပ်ငန်းခွင်လေထုအရည်အသွေးများတိုင်းတာခဲ့သည့်နေရာဖော်ပြချက်

စဉ်	တိုင်းတာသည့်နေရာများ	တည်နေရာဖော်ပြချက်
Э	ID-01	ဓာတုပစ္စည်းသိုလှောင်ခန်း
J	ID-02	ပလတ်စတစ်စေ့များသိုလှောင်ခန်း
5	ID-03	ပလတ်စတစ်စေ့များထုတ်လုပ်ခန်း
9	ID-04	တပ်ဆင်ရေးဌာန
၅	ID-05	Injection စစ်ဆေးခန်း
ઉ	ID-06	Paper Box သိုလှောင်ခန်း
9	ID-07	သိုလှောင်ရုံ
െ	ID-08	ပလတ်စတစ်ဘူးသန့်စင်ခန်း
6	ID-09	ပလတ်စတစ်ဘူးထုတ်လုပ်ခန်း
20	ID-10	မီးစက်ခန်းအမှတ်–၁
၁၁	ID-11	မီးစက်ခန်းအမှတ်–၂

### လုပ်ငန်းခွင်လေထုအရည်အသွေးတိုင်းတာမှုရလဒ်များ

			ပါရာမီတာ	
စဉ်	တိုင်းတာသည့်နေရာများ	VOC	PM <sub>10</sub>	PM <sub>2.5</sub>
		(ppm)	(µg/m³)	(µg/m³)
Э	ID-01	0.2	า	၆၉
J	ID-02	၁.၂	79	$\gamma$
5	ID-03	၁.၂	୯୧	၉၁
9	ID-04	0.J	၆	၈၃
၅	ID-05	0.J	IJ	ဂ
G	ID-06	0	ઉત્	Go
૧	ID-07	0	၇၁	၆၁
၈	ID-08	၂.၁	J9	၂၁
9	ID-09	၁.၂	၁၇	၁၅
00	ID-10	J	၇၀	ენ
၁၁	ID-11	J·9	૧ર	ე?

\_\_\_\_\_\_ လုပ်ငန်းခွင်လေထုအရည်အသွေးတွင်သတ်မှတ်ထားသောလမ်းညွှန်ချက်များမရှိပါ။

#### ၃) လျှပ်စစ်ထုတ်စက်ခေါင်းတိုင်ထုတ်လွှတ်မှုတိုင်းတာခြင်း

လျှပ်စစ်ထုတ်စက်ခေါင်းတိုင်ထုတ်လွှတ်မှုကို အပိုင်းသုံးပိုင်းခွဲ၍ အောက်ပါအတိုင်း တင်ပြအပ်ပါသည်။

#### မီးစက်၏အချက်အလက်များ

အမျိုးအစား ဒီဖယ်အင်ဂျင်သုံးလျှပ်စစ်ထုတ်စက်

စွမ်းအား ၁,၀၀၀ kVA (၁) လုံးနှင့် ၁,၅၀၀ kVA (၂) လုံး

လောင်စာဆီ ဒီဇယ်ဆီ

#### 💠 လျှပ်စစ်ထုတ်စက်ခေါင်းတိုင်မှထုတ်လွှတ်မှုအခိုးအငွေ့တိုင်းတာသည့်နေရာဖော်ပြချက်



ပုံ ၁-၆ လျှပ်စစ်ထုတ်စက်ခေါင်းတိုင်မှထုတ်လွှတ်မှုအခိုးအငွေ့တိုင်းတာနေပုံ

### ခေါင်းတိုင်ထုတ်လွှတ်မှုတိုင်းတာရရှိမှုရလဒ်များ

			တိုင်းတ	ာရရှိမှုရလ	ာဒ်များ	
စဉ်	ပါရာမီတာ	ယူနစ်	Generator-1	Generator-2	Generator-3	Small Combustion Facilities Emission Guidelines
Э	02	%	၁၈.၄	၁၇.၉	၁၇.၈	-
J	СО	mg/Nm <sup>3</sup>	975	၄၁၆	9J0	-
5	CO <sub>2</sub>	%	J.J၅	၂.၃၁	၂.၁၂	-
9	NO <sub>2</sub>	mg/Nm <sup>3</sup>	၉၁	၉၂	၉၀	၄၆၀
၅	SO <sub>2</sub>	mg/Nm <sup>3</sup>	ე.©	ე.၁	၁.၉	J,000

တိုင်းတာမှုရလဒ်များအရ မီးစက်ခေါင်းတိုင်မှဓာတ်ငွေ့ထွက်ရှိမှုများသည် သတ် မှတ်စံနှုန်းအတွင်းရှိကြောင်း တွေ့ရပါသည်။

### (ခ) ဆူညံသံနှင့်တုန်ခါမှုများ

### ၁) ပတ်ဝန်းကျင်ဆူညံသံ

ပတ်ဝန်းကျင်ဆူညံသံနှင့်စပ်လျဉ်း၍ အပိုင်းနှစ်ပိုင်းကို အောက်ပါအတိုင်း တင်ပြ ထားပါသည်။

### 💠 ပတ်ဝန်းကျင်ဆူညံသံတိုင်းတာခဲ့သည့်နေရာဖော်ပြချက်

စဉ်	တိုင်းတာသည့် နေရာများ	ပထဝီဆိုင်ရာနေရာဖော်ပြချက်	တည်နေရာ
Э	NMP	မြောက်လတ္တီတွဒ် ၁၆°၅၆'၂၉.၀၉"	စက်ရုံ–၂၏ရုံးခန်း
		အရှေ့လောင်ဂျီတွဒ် ၉၆°၀၉'၂၃.၈၅"	ဝင်ပေါက်အနီး



ပုံ ၁–၇ ပတ်ဝန်းကျင်ဆူညံသံတိုင်းတာခဲ့သည့်နေရာဖော်ပြပုံ

#### 💠 ပတ်ဝန်းကျင်ဆူညံသံတိုင်းတာမှုရလဒ်များ

စဉ်	တိုင်းတာသည့် နေရာများ	တိုင်းတာသည့် ရလဒ်များ (dBA)	NEQG (dBA)	မှတ်ချက်
Э	NMP	၅၈.၄၂	၇၀	နေ့အချိန် (၀၇:၀၀ a.m. ~ ၁၀:၀၀ p.m.)
		ჟი.၄၇	၇၀	ညအချိန် (၁၀:၀၀ p.m. ~ ၀၇:၀၀ a.m.)

စက်ရုံစီမံကိန်းနေရာသည် စက်မှုဇုန်အတွင်းတွင်တည်ရှိပြီး နေ့အချိန်နှင့် ညအချိန် ဆူညံသံတိုင်းတာမှုတန်ဖိုးများသည် စံနှုန်းအတွင်းကျရောက်ကြောင်း တွေ့ရပါသည်။ သို့ပါ၍ အလုပ်သမား များနှင့် ပတ်ဝန်းကျင်အပေါ် ဆူညံသံကြောင့် သက်ရောက်မှုမရှိနိုင်ပါ။

#### ၂) လုပ်ငန်းခွင်ဆူညံသံများ

လုပ်ငန်းခွင်ဆူညံသံများနှင့်စပ်လျဉ်း၍ အောက်ပါအတိုင်း အပိုင်းနှစ်ပိုင်းတင်ပြထား ပါသည်။

### 💠 လုပ်ငန်းခွင်ဆူညံသံတိုင်းတာခဲ့သည့်နေရာများဖော်ပြချက်

စဉ်	တိုင်းတာသည့်နေရာများ	တည်နေရာဖော်ပြချက်
Э	ID-01	ဓာတုပစ္စည်းသိုလှောင်ခန်း
J	ID-02	ပလတ်စတစ်စေ့များသိုလှောင်ခန်း
5	ID-03	ပလတ်စတစ်စေ့များထုတ်လုပ်ခန်း
9	ID-04	တပ်ဆင်ရေးဌာန
ච	ID-05	Injection စစ်ဆေးခန်း
ઉ	ID-06	Paper Box သိုလှောင်ခန်း
?	ID-07	သိုလှောင်ရုံ
െ	ID-08	ပလတ်စတစ်ဘူးသန့်စင်ခန်း
6	ID-09	ပလတ်စတစ်ဘူးထုတ်လုပ်ခန်း
00	ID-10	မီးစက်ခန်းအမှတ်–၁
၁၁	ID-11	မီးစက်ခန်းအမှတ်–၂

# • လုပ်ငန်းခွင်ဆူညံသံတိုင်းတာမှုရလဒ်များ

စဉ်	တိုင်းတာသည့် နေရာများ	ဆူညံသံတိုင်း တာမှုရလဒ်များ (Duration = 1hr) (dB[A])	OHS Guidelines (8 hr) (dB[A])
၁	ID-01	၆၀.၆	၉၀
J	ID-02	G <sub>G</sub> .ი	၉၀
5	ID-03	၈၇.၅	၉၀
9	ID-04	<b>ე</b> २∙၅	၉၀
၅	ID-05	<b>ი</b> ც.ჟ	၉၀
G	ID-06	ეგ.ც	၉၀
૧	ID-07	99.२	၉၀
၈	ID-08	၈၇.၂	၉၀
G	ID-09	e.J	၉၀
00	ID-10	<u>ც</u> გ. ი	၉၀
၁၁	ID-11	0.000	၉၀

လုပ်ငန်းခွင်ဆူညံသံတိုင်းတာမှုရရှိမှုရလဒ်တန်ဖိုးများအရ မီးစက်ခန်းမှလွဲ၍ ကျန် တန်ဖိုးများသည် စံနှုန်းအတွင်းကျရောက်ကြောင်း တွေ့ရပါသည်။ မီးစက်ခန်းသည် လျှပ်စစ် ဓာတ်အား ပြတ်တောက်သည့်အချိန်တွင်သာမောင်းနှင်ပြီး ယင်းအချိန်တွင်သာ ထိခိုက်မှု ဖြစ်နိုင်ပါသည်။

#### (ဂ) အလင်းရောင်ပမာဏ

အလင်းရောင်ပမာဏနှင့်စပ်လျဉ်း၍ အပိုင်းနှစ်ပိုင်းခွဲခြား၍ အောက်ပါအတိုင်း တင်ပြထားပါ သည်။

# အလင်းရောင်ပမာဏတိုင်းတာသည့်နေရာဖော်ပြချက်

O	ဉ်	တိုင်းတာသည့် နေရာများ	တည်နေရာဖော်ပြချက်
	)	ID	ပလတ်စတစ်ဘူးထုတ်လုပ်ခန်း

# အလင်းရောင်ပမာဏတိုင်းတာရရှိမှုတန်ဖိုးများ

စဉ်	တိုင်းတာသည့် နေရာများ	Measured Values (Lux)	Guideline Values (Lux)
၁	ID	്വാ	၁၅ი-၃იი


အထက်ဖော်ပြပါဖယားအရ အလင်းရောင်ပမာဏသည် သတ်မှတ်ချက်အတွင်းရှိ ကြောင်း တွေ့ရပါသည်။

### (ဃ) ရေနှင့်စွန့်ပစ်ရည်အရည်အသွေး


ရေနှင့်စွန့်ပစ်ရည်အရည်အသွေးနှင့်စပ်လျဉ်း၍ အောက်ပါအတိုင်း အပိုင်းနှစ်ပိုင်းဖြင့် တင်ပြ အပ်ပါသည်။

### 💠 ရေနှင့်စွန့်ပစ်ရည်နမူနာကောက်ယူသည့်နေရာဖော်ပြချက်

စဉ်	တိုင်းတာသည့် နေရာများ	ဖော်ပြချက်	ပထဝီဆိုင်ရာနေရာဖော်ပြချက်	မှတ်ချက်
၁	WSP-1	တွင်းရေ	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၃.၅၀"	ရေ
		• .	အရှေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၅.၂၀"	•
J	WSP-2	စက်ရုံတွင်းရှိ	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၅.၂၆"	စွန့်ပစ်ရည်
		မြောင်း	အရှေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၄.၀၇"	
5	WSP-3	သန့်စင်ပြီးရေ	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၅.၄၅"	ရေ
			အရေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၄.၃၄"	
9	WSP-4	စွန့်ပစ်ရည် သန့်	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၅.၀၈"	စွန့်ပစ်ရည်
		စင်စက်မှအထွက်	အရှေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၅.၃၃"	
၅	WSP-5	စွန့်ပစ်ရည်သန့်	မြောက်လတ္တီတွဒ် ၁၆° ၅၆'၂၅.၁၉"	စွန့်ပစ်ရည်
		စင်စက်သို့အအဝင်	အရှေ့လောင်ဂျီတွဒ် ၉၆° ၀၉'၂၅.၆၀"	

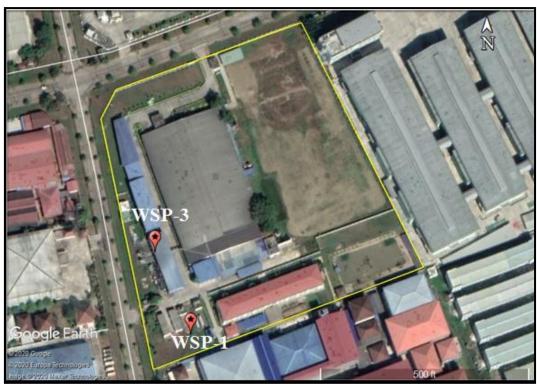

ပုံ ၁–၈ ရေနမူနာကောက်ယူသည့်နေရာများဖော်ပြပုံ

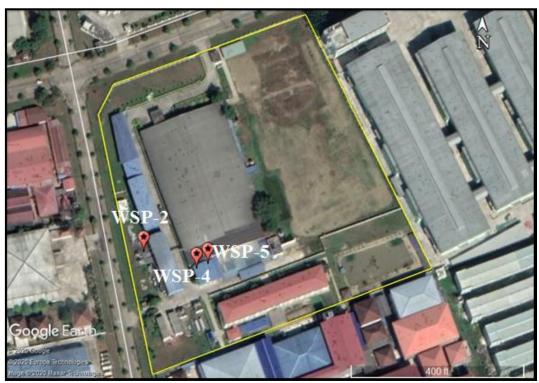

ပုံ ၁–၉ စွန့်ပစ်ရည်နမူနာကောက်ယူသည့်နေရာများဖော်ပြပုံ







ပုံ ၁–၁၀ စွန့်ပစ်ရည်နမူနာများကောက်ယူနေပုံ

# ရေနှင့်စွန့်ပစ်ရည်တို့၏ဓာတ်ခွဲရလဒ်များ

ဇယား ၁−၂ ရေနမူနာဓာတ်ခွဲရလဒ်များ (GMES Laboratory)

စဉ်	ပါရာမီတာ	ယူနစ်	ဓာတ်ခွဲရလဒ်များ		Drinking Water Standard
			WSP-1	WSP-3	WHO (2011)
Э	Aluminum	mg/l	0.0၂	0.0၂	٥.၂
J	Arsenic	µg/l	0.00	0	00
5	Chloride	mg/l	၁၆၀	6	၂၅၀
9	Copper	mg/l	ND	ND	J
၅	Cyanide	mg/l	ND	ND	0.09
G	Manganese	mg/l	೦.೯	ND	0.9
૧	рН	-	၆.၀၁	၅.၇၂	<b>હ</b> .ე~ი.ე
റ	Sulfate	mg/l	ND	ND	၂၅၀
6	Total Alkalinity	mg/l	၇၈	၁၅	-
00	Total Dissolved Solids	mg/l	ეცი	00	Goo
၁၁	Total Hardness	mg/l	၁၉၇	၁၂	၅၀၀
၁၂	Total Iron	mg/l	5	<0.0>	0.2
၁၃	Turbidity	NTU	၁၀.၇	၈.၈၆	၅

ND - Not Detected

ဓာတ်ခွဲခန်းရလဒ်အရ သန့်စင်ပြီးနောက် turbidity တန်ဖိုးများသည် ၁၀.၇ NTU မှ ၈.၈၆ NTU သို့ ကျဆင်းသွားသော်လည်း WSP-1 (တွင်းရေ) နှင့် WSP-3 (သန့်စင်ပြီးရေ) တို့မှ turbidity သည် လမ်းညွှန် ချက်များထက် ပိုများနေသေးသည်။ WSP-1 မှ မန်းဂနိနှင့် total iron တို့သည် လမ်းညွှန်ချက်များထက် မြင့် မားသော်လည်း သန့်စင်ပြီးနောက်တွင်မူ လမ်းညွှန်ချက်အတွင်းရှိကြောင်း တွေ့ရှိရပါသည်။ WSP-2 မှ pH တန်ဖိုးသည် လမ်းညွှန်များထက် အနည်းငယ်လျော့နည်းနေပြီး အခြားသောပါရာမီတာများသည် ကန့်သတ် ချက်အတွင်း ရှိပါသည်။

ဧယား ၁–၃ စွန့်ပစ်ရည်နမူနာဓာတ်ခွဲရလဒ်များ (GMES Laboratory)

စဉ်	ပါရာမီတာ	ယူနစ်	e	ဓာတ်ခွဲရလဒ်များ		National Environmental Quality (Emission) Guidelines (2015)
ا مح	Old[50055	~~~~	WSP-2	WSP-4	WSP-5	General Application
Э	Arsenic	mg/l	0	0	0	0.0
J	Chemical Oxygen Demand (COD)	mg/l	၆၂	Jo	၁၂၀	၂၅၀
5	Oil and Grease	mg/l	ND	ND	J	00
9	рН	-	6.99	၆.၀၁	<u> </u>	<b>ତ~</b> ၉
၅	Total Suspended Solids (TSS)	mg/l	J	Jo	၁၅၁၀	ეი

ND - Not Detected

ဓာတ်ခွဲစမ်းသပ်ထားသောစွန့်ပစ်ရည်အရည်အသွေးရလဒ်များအရ ရေနမူနာ-၅ (စွန့်ပစ်ရည်သန့်စင် စက်သို့အအဝင်) ၏ TSS မှလွဲ၍ ကျန်တန်ဖိုးများသည် သတ်မှတ်စံနှုန်းအတွင်းရှိကြောင်းတွေ့ရှိရသည်။ သို့ရာ တွင်လည်း စွန့်ပစ်ရည်သန့်စင်စက်တွင် သန့်စင်ပြီးနောက် TSS တန်ဖိုးသည် ၁၅၁၀ mg/l မှ ၂၀ mg/l သို့ လျော့နည်းသွားကြောင်း တွေ့ရှိရသည်။ ထို့ကြောင့် စွန့်ပစ်ရည်သန့်စင်စက်သည် ထိရောက်မှုရှိကြောင်းသိရှိရ သည်။

#### (c) မြေအရည်အသွေး

မြေအရည်အသွေးနှင့်စပ်လျဉ်း၍ အောက်ပါအတိုင်း အပိုင်းနှစ်ပိုင်း တင်ပြအပ်ပါသည်။

#### 💠 မြေနမူနာကောက်ယူသည့်နေရာဖော်ပြချက်

စဉ်	နမူနာကောက် ယူသည့်နေရာ	ပထဝီဆိုင်ရာနေရာ ဖော်ပြချက်	တည်နေရာ
O	SSP	မြောက်လတ္တီတွဒ် ၁၆˚ ၅၆'၂၃.၃၀" အရှေ့လောင်ဂျီတွဒ် ၉၆˚ ၀၉'၂၅.၁၀"	စက်ရုံ–၂ ဝင်းအတွင်း

SSP = Soil Sampling Point



ပုံ ၁–၁၁ မြေနမူနာကောက်ယူသည့်နေရာဖော်ပြပုံ



ပုံ ၁–၁၂ မြေနမူနာကောက်ယူနေပုံ

## မြေနမူနာဓာတ်ခွဲရလဒ်များ

စဉ်	ပါရာမီတာ	ယူနစ်	Analysis Value
၁	Aluminum	mg/kg soil	၀.၁၅
J	Arsenic	mg/kg soil	၀.၀၂၅
5	Chloride	g/kg soil	၀.၃၂
9	Copper	mg/kg soil	ND
၅	Cyanide	mg/kg soil	ND
G	Extractable Acidity	cmol/kg soil	ე.6

စဉ်	ပါရာမီတာ	ယူနစ်	Analysis Value
9	Manganese	mg/kg soil	၀.၀၂၆
၈	P–Alkalinity	mmol/l extract	0
9	pH	-	ე.၂၇
00	Total Alkalinity	mmol/l extract	o. <u></u> ჟე
၁၁	Total Iron	g/kg soil	၀.၀၁၅

အထက်ဖော်ပြပါဓာတ်ခွဲရလဒ်များကို အခြေခံရလဒ်များအဖြစ်သတ်မှတ်ပြီး နောင် တိုင်းတာမှုတန်ဖိုးများဖြင့် နှိုင်းယှဉ်ရန်ဖြစ်ပါသည်။ ယင်းသို့နှိုင်းယှဉ်မှုအရ ပိုမိုတိုးတက်လာ သည်/ဆုတ်ယုတ်လာသည်ကို သိနိုင်မည်ဖြစ်ပါသည်။

၁–၅–၂။ သဘာဝပတ်ဝန်းကျင်/ရုပ်ပတ်ဝန်းကျင် (ဆင့်ပွားအချက်အလက်များ)

#### (က) သဘာဝ/ရုပ်ပိုင်းဆိုင်ရာပတ်ဝန်းကျင်

စီမံကိန်းဧရိယာရှိ ရာသီဥတု၊မြေမျက်နှာသွင်ပြင်၊ဘူမိအခြေအနေ၊မြေထုနှင့်ရေဆင်းစသည့် အခြေခံအချက်အလက်များကို ရုပ်ပတ်ဝန်းကျင်အဖြစ်တင်ပြထားပါသည်။ ယင်းအချက်အလက်များ ကို မြို့နယ်အထွေထွေအုပ်ချုပ်ရေးဦးစီးဌာန၏ ၂၀၂၀ ခုနှစ် ရန်ကုန်တိုင်းဒေသကြီး၊ မင်္ဂလာဒုံမြို့နယ် ဒေသဆိုင်ရာအချက်အလက်များမှ ရယူထားပါသည်။ ယင်းတို့ကို အောက်ပါအတိုင်း အပိုင်း (၅) ပိုင်း ဖြင့် တင်ပြထားပါသည်။

- 💠 ရာသီဥတု
- 💠 မြေမျက်နှာသွင်ပြင်
- 💠 ဘူမိအခြေအနေ
- 💠 မြေထု
- 💠 ရေဆင်း

#### (ခ) ဧဝဆိုင်ရာအချက်အလက်များ

ဤခေါင်းစဉ်အောက်တွင် သဘာဝပေါက်ရောက်ပင်များနှင့် တောရိုင်းတိရစ္ဆာန်များ၏အခြေ အနေကို ကောက်နှုတ်တင်ပြထားပါသည်။

#### (ဂ) လူမှုစီးပွားအခြေအနေ

မင်္ဂလာဒုံမြို့နယ်၏လူမှုစီးပွားအခြေအနေများကို အောက်ပါခေါင်းစဉ်များဖြင့် တင်ပြအပ်ပါ သည်။

- 💠 လူဦးရေနှင့်အဖွဲ့အစည်း
- 💠 ကိုးကွယ်မှု
- 💠 ပညာရေးကဏ္ဍ
- 💠 လမ်းပန်းဆက်သွယ်ရေး
- ကျန်းမာရေးကဏ္ဍ
- 💠 စီးပွားရေး

- 💠 မြေအသုံးချမှု
- လုပ်သားအင်အား

### ၁–၆။ သက်ရောက်မှုများနှင့်လျော့ပါးစေရေးနည်းလမ်းများအကျဉ်းချုပ်

MAOI စက်ရုံ–၂ သည် အဆောက်အအုံများကို ဆောက်လုပ်ထားပြီးသားဖြစ်သောကြောင့် တည် ဆောက်ရေးကာလသက်ရောက်မှုများကို ထည့်သွင်းစဉ်းစားရန်မလိုအပ်ပါ။

MAOI ထုတ်ကုန်များမှ ပြန်လည်သန့်စင်နိုင်သောပစ္စည်းများ (ဖန်နှင့် ပလတ်စတစ်ကဲ့သို့သော) ထွက် ရှိပါသည်။ သို့သော်လည်း အဆိုပါထုတ်ကုန်များသည် အခြားသောထုတ်ကုန်ပစ္စည်းများကဲ့သို့ပင် ထုတ်လုပ်မှု လုပ်ငန်းစဉ်၏အဆင့်ဆင့်ကဲ့သို့ပင် အမျိုးမျိုးသောပတ်ဝန်းကျင်ဆိုင်ရာသက်ရောက်မှုများကို ဖြစ်ပေါ်စေနိုင်ပြီး ဤစီမံကိန်းကိုအကောင်အထည်ဖော်ခြင်းကြောင့် စီမံကိန်းဧရိယာအနီးတစ်ဝိုက်တွင် ကောင်းကျိုးနှင့်ဆိုးကျိုး တစ်ချို့သက်ရောက်မှုရှိနိုင်ပါသည်။ ပတ်ဝန်းကျင်ဆိုင်ရာသက်ရောက်မှုများ၏အဓိကအရင်းအမြစ်မှာ ကုန် ကြမ်းမှနောက်ဆုံးထုတ်ကုန်အထိ လုပ်ဆောင်ရသောလုပ်ငန်းစဉ်အတွင်း လိုအင်သောစွမ်းအင်သုံးစွဲမှုနှင့် ရေ သုံးစွဲမှုကြောင့်ဖြစ်သည်။

လျော့ပါးစေရေးနည်းလမ်းများသည် သိသာထင်ရှားသောသက်ရောက်မှုများကို ရှောင်ကြဉ်ရန်၊ လျှော့ ချရန်ဖြစ်သည်။ လုပ်ငန်းလည်ပတ်ခြင်းကာလနှင့်လုပ်ငန်းဖျက်သိမ်းခြင်းကာလများတွင် ရုပ်ဂုဏ်သတ္တိ၊ ဇီဝ ဖြစ်စဉ်နှင့် လူမှုပတ်ဝန်းကျင်တို့အပေါ် သိသာထင်ရှားသောသက်ရောက်မှုနှင့် လျော့ပါးစေရေးနည်းလမ်းများ ကို အခန်း (၆) နှင့် (၇) တို့တွင်ဖော်ပြထားသည်။

### ၁–၇။ စောင့်ကြပ်ကြည့်ရှုရေးအစီအစဉ်

#### ပတ်ဝန်းကျင်ဆိုင်ရာစောင့်ကြပ်ကြည့်ရှုရေး

စောင့်ကြပ်ကြည့်ရှုခြင်းသည် အဆိုပြုထားသော ပတ်ဝန်းကျင်ဆိုင်ရာလျော့ပါးစေရေးနည်းလမ်းများ အကောင်အထည်ဖော်ဆောင်ရွက်ရေးအတွက် မရှိမဖြစ်လိုအပ်သော အစိတ်အပိုင်းတစ်ခုဖြစ်သည်။ ပတ်ဝန်း ကျင်ဆိုင်ရာစောင့်ကြပ်ကြည့်ရှုရေးတွင် အသုံးဝင်သောအချက်အလက်များပါဝင်ပြီး လျော့ပါးစေရေးနည်း လမ်းများအကောင်အထည်ဖော်ရာမှ ပတ်ဝန်းကျင်ဆိုင်ရာအရည်အသွေးတိုးတက်စေမည့် ထိရောက်သောလုပ် ဆောင်ချက်များကိုချမှတ်ရန် ရည်ရွယ်ပါသည်။

စောင့်ကြပ်ကြည့်ရှုခြင်းတွင် ဆိုးကျိုးသက်ရောက်မှုများကိုလျှော့ချနိုင်ရန်၊ သတ်မှတ်ချက်စံချိန်စံနှုန်း များနှင့်ကိုက်ညီသော အကြံပြုချက်များပေးနိုင်ရန် စီမံကိန်းဧရိယာအတွင်း လုပ်ငန်းဆောင်ရွက်ချက်များကို လေ့လာခြင်း၊ သုံးသပ်အကဲဖြတ်ခြင်း၊ ဆန်းစစ်ခြင်းတို့ပါဝင်ပါသည်။ ယင်းအစီအစဉ်သည် သက်ဆိုင်ရာဌာန များမှညွှန်ကြားထားသော ကြိမ်နှုန်းများအတိုင်း ဖြစ်ပေါ်နိုင်သောသက်ရောက်မှုများအပေါ် အခြေခံ၍ အစီရင် ခံစာနှင့်တကွ ရှင်းလင်းပြည့်စုံစွာ တင်ပြရမည်။

ပတ်ဝန်းကျင်ဆိုင်ရာထိခိုက်မှုဆန်းစစ်ခြင်းဆိုင်ရာလုပ်ထုံးလုပ်နည်း အပိုဒ် (၁၀၈) အရ စီမံကိန်းအဆို ပြုသူသည် ပတ်ဝန်းကျင်စီမံခန့်ခွဲမှုအစီအစဉ်၏မေယားပါအတိုင်း စောင့်ကြပ်ကြည့်ရှုမှုအစီရင်ခံစာကို ဝန်ကြီး ဌာနသို့ (၆) လတစ်ကြိမ် (သို့မဟုတ်) ဝန်ကြီးဌာနကသတ်မှတ်သည့်အတိုင်း တင်ပြရမည်။

## eယား ၁–၄ လုပ်ငန်းလည်ပတ်ခြင်းနှင့်လုပ်ငန်းဖျက်သိမ်းခြင်းကာလပတ်ဝန်းကျင်ဆိုင်ရာစောင့်ကြပ်ကြည့်ရှုခြင်းအစီအစဉ်

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှု ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ			
	လုပ်ငန်းလည်ပတ်ခြင်းကာလ								
Э	လေထုအရည်	ပတ်ဝန်းကျင်ဆိုင်ရာ လေအရည်အသွေး	တစ်နှစ်လျှင် ၁ ကြိမ်	စက်ကိရိယာများ	စက်ရုံဝင်းအတွင်း	ပတ်ဝန်းကျင်ဆိုင်ရာ			
	အသွေး			ဖြင့် တိုင်းတာခြင်း		စီမံခန့်ခွဲမှုအဖွဲ့			
		လုပ်ငန်းခွင်လေအရည်အသွေး	တစ်နှစ်လျှင် ၂ ကြိမ်	စက်ကိရိယာများ	လုပ်ငန်းခွင်	ပတ်ဝန်းကျင်ဆိုင်ရာ			
				ဖြင့် တိုင်းတာခြင်း	(ဓာတုပစ္စည်းသိုလှောင်ခန်း၊	စီမံခန့်ခွဲမှုအဖွဲ့			
					ပလတ်စတစ်စေ့များသိုလှောင်				
					ခန်း၊ ပလတ်စတစ်စေ့များထုတ်				
					လုပ်ခန်း၊ တပ်ဆင်ရေးဌာန၊				
					Injection စစ်ဆေးခန်း၊ Paper				
					Box သိုလှောင်ခန်း၊ သိုလှောင်				
					ရုံ၊ ပလတ်စတစ်ဘူးသန့်စင်				
					ခန်း၊ ပလတ်စတစ်ဘူးထုတ်				
					လုပ်ခန်း၊ မီးစက်ခန်းအမှတ်–၁				
					နှင့် မီးစက်ခန်းအမှတ်–၂)				
		မီးစက်များ၏မီးခိုးခေါင်းတိုင်မှထုတ်လွှတ်မှုများ	တစ်နှစ်လျှင် ၂ ကြိမ်	စက်ကိရိယာများ	မ်းစက်များ၏ခေါင်းတိုင်များ	ပတ်ဝန်းကျင်ဆိုင်ရာ			
				ဖြင့် တိုင်းတာခြင်း	အားလုံး	စီမံခန့်ခွဲမှုအဖွဲ့			
		<ul> <li>ယာဉ်များနှင့်စက်ပစ္စည်းကိရိယာများကို စစ်</li> </ul>	လစဉ်	စစ်ဆေးခြင်း	လုပ်ငန်းခွင်	ပတ်ဝန်းကျင်ဆိုင်ရာ			
		ဆေးခြင်း				စီမံခန့်ခွဲမှုအဖွဲ့နှင့်			
		<ul> <li>လေဝင်လေထွက်စနစ်ကိုစစ်ဆေးခြင်း</li> </ul>				ကြီးကြပ်ရေးမှူးများ			
		<ul> <li>အိမ်သာများနှင့်မိလ္လာစနစ်ကိုစစ်ဆေးခြင်း</li> </ul>							

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှ ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
		• အမှိုက်ပုံးများနှင့်အမှိုက်စုစည်းရာနေရာများ				
		ကို စစ်ဆေးခြင်း				
		• စစ်ဆေးမှုမှတ်တမ်း/အစီရင်ခံစာပြင်ဆင်ခြင်း				
J	ဆူညံသံ	ပတ်ဝန်းကျင်ဆိုင်ရာဆူညံသံအဆင့်	တစ်နှစ်လျှင် ၁ ကြိမ်	စက်ကိရိယာများ	စက်ရုံဝင်းအတွင်း	ပတ်ဝန်းကျင်ဆိုင်ရာ
				ဖြင့် တိုင်းတာခြင်း		စီမံခန့်ခွဲမှုအဖွဲ့
		လုပ်ငန်းခွင်ဆိုင်ရာဆူညံသံအဆင့်	တစ်နှစ်လျှင် ၂ ကြိမ်	စက်ကိရိယာများ	လုပ်ငန်းခွင်	ပတ်ဝန်းကျင်ဆိုင်ရာ
				ဖြင့် တိုင်းတာခြင်း	(ဓာတုပစ္စည်းသိုလှောင်ခန်း၊	စီမံခန့်ခွဲမှုအဖွဲ့
					ပလတ်စတစ်စေ့များသိုလှောင်	
					ခန်း၊ ပလတ်စတစ်စေ့များထုတ်	
					လုပ်ခန်း၊ တပ်ဆင်ရေးဌာန၊	
					Injection စစ်ဆေးခန်း၊ Paper	
					Box သိုလှောင်ခန်း၊ သိုလှောင်	
					ရုံ၊ ပလတ်စတစ်ဘူးသန့်စင်	
					ခန်း၊ ပလတ်စတစ်ဘူးထုတ်	
					လုပ်ခန်း၊ မီးစက်ခန်းအမှတ်–၁	
					နှင့် မီးစက်ခန်းအမှတ်–၂)	
		<ul> <li>ဆူညံသံနှင့်တုန်ခါမှုဖြစ်စေသည့်လုပ်ငန်းများ</li> </ul>	တစ်နှစ်လျှင် ၂ ကြိမ်	စစ်ဆေးခြင်း	လုပ်ငန်းခွင်	ပတ်ဝန်းကျင်ဆိုင်ရာ
		ကို မှတ်တမ်းတင်ခြင်း	(သိုမဟုတ်)			စီမံခန့်ခွဲမှုအဖွဲ့နှင့်
		<ul> <li>အသံအကာအကွယ်ပစ္စည်းများတပ်ဆင်ထားမှု</li> </ul>	ညွှန်ကြားချက်			ကြီးကြပ်ရေးမှူးများ
		ကို စစ်ဆေးခြင်း	အတိုင်း			
		• တစ်ကိုယ်ရည်သုံးကာကွယ်ရေးပစ္စည်းများကို				
		လုံလောက်စွာ ထောက်ပံ့ပေးခြင်း				

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှ ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
5	အလင်းပမာဏ	အလင်းပမာဏ	တစ်နှစ်လျှင် ၂ ကြိမ်	စက်ကိရိယာများ	လုပ်ငန်းခွင်	ပတ်ဝန်းကျင်ဆိုင်ရာ
				ဖြင့် တိုင်းတာခြင်း		စီမံခန့်ခွဲမှုအဖွဲ့
9	ရေနှင့်စွန့်ပစ်ရည်	ရေအရည်အသွေး	တစ်နှစ်လျှင်၁ ကြိမ်	ဓာတ်ခွဲစမ်းသပ်	တွင်းရေနှင့် သန့်စင်ပြီးရေ	ပတ်ဝန်းကျင်ဆိုင်ရာ
	အရည်အသွေး			ခြင်း		စီမံခန့်ခွဲမှုအဖွဲ့
		စွန့်ပစ်ရည်အရည်အသွေး	တစ်နှစ်လျှင်၁ ကြိမ်	ဓာတ်ခွဲစမ်းသပ်	စက်ရုံအတွင်းရှိ မြောင်းရေ၊	ပတ်ဝန်းကျင်ဆိုင်ရာ
				ခြင်း	ရေဆိုးသန့်စင်စက်မှအထွက်	စီမံခန့်ခွဲမှုအဖွဲ့
					နှင့် ရေဆိုးသန့်စင်စက်သို့	
					အဝင်	
		<ul> <li>မိုးရေစီးဆင်းမှုများကိုစစ်ဆေးခြင်း</li> </ul>	လစဉ်	စစ်ဆေးခြင်း	လုပ်ငန်းခွင်နှင့် စက်ရုံဝင်း	ပတ်ဝန်းကျင်ဆိုင်ရာ
		<ul> <li>အစိုင်အခဲစွန့်ပစ်ပစ္စည်းများစုစည်းမှုကို စစ်</li> </ul>			အတွင်း	စီမံခန့်ခွဲမှုအဖွဲ့ နှင့်
		ဆေးခြင်းနှင့်ထိန်း သိမ်းခြင်း				ကြီးကြပ်ရေးမှူးများ
		■ ကွန်ကရစ်ကြမ်းခင်းများအခြေအနေကို စစ် ဆေးခြင်း				
		■ ဆီ၊ ချောဆီနှင့် လောင်စာများ ဖိတ်စင်မှု၊ ယို				
		စိမ့်မှုများကို စစ်ဆေးခြင်း				
		<ul> <li>စစ်ဆေးမှုမှတ်တမ်း/အစီရင်ခံစာပြင်ဆင်ခြင်း</li> </ul>				
ච	မြေထုအရည်	မြေ	တစ်နှစ်လျှင်၁ ကြိမ်	ဓာတ်ခွဲစမ်းသပ်	စက်ရုံဝင်းအတွင်း	ပတ်ဝန်းကျင်ဆိုင်ရာ
	အသွေး			ခြင်း		စီမံခန့်ခွဲမှုအဖွဲ့
6.	စွန့်ပစ်ပစ္စည်း စွန့်	<ul> <li>မတူညီသောစွန့်ပစ်ပစ္စည်းများအလိုက် အမှိုက်</li> </ul>	လစဉ်	စစ်ဆေးခြင်း	စက်ရုံဝင်းအတွင်းနှင့်	ပတ်ဝန်းကျင်ဆိုင်ရာ
	ပစ်မှု	ပုံးများ ခွဲခြားထားခြင်း			အနီးအနားပတ်ဝန်းကျင်	စီမံခန့်ခွဲမှုအဖွဲ့
		■ စွန့်ပစ်ပစ္စည်းပမာဏကိုမှတ်တမ်းတင်ထား ခြင်း				

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှု ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
		<ul><li>အမှိုက်စွန့်ပစ်မှုစနစ်ကိုစစ်ဆေးခြင်း</li><li>အမှိုက်သိုလှောင်မှုစနစ်ကိုစစ်ဆေးခြင်း</li></ul>				
7	အန္တရာယ်ရှိစွန့်ပစ် ပစ္စည်းစွန့်ပစ်မှု	<ul> <li>အန္တရာယ်ရှိစွန့်ပစ်ပစ္စည်းပမာဏကိုမှတ်တမ်း တင်ခြင်း</li> <li>စွန့်ပစ်မှုစနစ်ကိုစစ်ဆေးခြင်း</li> <li>အန္တရာယ်ရှိစွန့်ပစ်ပစ္စည်းသိုလှောင်ဧရိယာကို စစ်ဆေးခြင်း</li> </ul>	လစဉ်	စစ်ဆေးခြင်း	အန္တရာယ်ရှိစွန့်ပစ်ပစ္စည်း သိုလှောင်ဧရိယာ	ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့
6	ရေအသုံးပြုမှု	■ ရေအသုံးပြုမှုပမာဏကို မှတ်တမ်းတင်ထား ခြင်း	နေ့စဉ်/လစဉ်	ရေမီတာဖြင့်မှတ် တမ်း တင်ခြင်း	သောက်ရေ၊ လုပ်ငန်းသုံးရေနှင့် ဝန်ထမ်းသုံးရေ	ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့
6	လျှပ်စစ်အသုံးပြုမှု	■ လျှပ်စစ်အသုံးပြုမှုပမာဏကိုမှတ်တမ်းတင် ထားခြင်း	နေ့စဉ်/လစဉ်	မှတ်တမ်းတင်ခြင်း	လျှပ်စစ်မီတာ	ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့
00	လောင်စာအသုံး ပြုမှု	■ ဒီဖယ်အသုံးပြုမှုပမာဏကိုမှတ်တမ်းတင်ထား ခြင်း	နေ့စဉ်/လစဉ်	မှတ်တမ်းတင်ခြင်း	မီးစက်များ	ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့
22	လုပ်ငန်းခွင်ကျန်း မာရေးနှင့်ဘေး အန္တရာယ်ကင်းရှင်း ရေး	<ul> <li>လုပ်ငန်းခွင်ကျန်းမာရေးနှင့် ဘေးအန္တရာယ် ကင်းရှင်းရေးကို မှတ်တမ်းတင်ခြင်း</li> <li>အလုပ်သမားများ၏အဆင်မပြေမှုများနှင့် တောင်းဆိုမှုများကို မှတ်တမ်းတင်ခြင်း</li> <li>တစ်ကိုယ်ရည်သုံးကာကွယ်ရေးပစ္စည်းများ အားစစ်ဆေးခြင်းနှင့် မှတ်တမ်းတင်ခြင်း</li> <li>ရှေးဦးသူနာပြုဆေးသေတ္တာများထားရှိပေး ခြင်း</li> <li>အလုပ်သမားများနားနေဆောင်များနှင့်</li> </ul>	လစဉ်	စစ်ဆေးခြင်း	စက်ရုံဝင်းအတွင်း	HSE အရာရှိနှင့် ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှု ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
		သောက်ရေရရှိမှုအခြေအနေများအား စစ်ဆေး ပေးခြင်း • အိမ်သာနှင့်မိလ္လာစနစ်အားစစ်ဆေးခြင်း • အရေးကြီးသောနေရာတွင် ဝန်ထမ်းများ အတွက် ပုံမှန်စစ်ဆေးခြင်း	တစ်နှစ်လျှင်၁ ကြိမ်	စစ်ဆေးခြင်း	စက်ရုံဝင်းအတွင်း	HSE အရာရှိနှင့် ပတ်ဝန်းကျင်ဆိုင်ရာ
		ဝန်ထမ်းတစ်ဦးစီ၏ ဆေးစစ်ချက်မှတ်တမ်း     OHS နှင့် ရှေးဦးသူနာပြုစုခြင်းအတွက် လေ့ ကျင့်ပေးခြင်း	202			စီမံခန့်ခွဲမှုအဖွဲ့
၁၂	အခြားသောလူမှု ဆိုင်ရာကိစ္စရပ်များ	<ul> <li>လူမှုတာဝန်သိအစီအစဉ်လုပ်ငန်းများ</li> <li>အလုပ်သမားဖူလုံထောက်ပံ့ရေးဆောင်ရွက်မှု များ</li> </ul>	နှစ်စဉ <u>်</u>	မှတ်တမ်းတင်ခြင်း	အနီးဆုံးဒေသနှင့်စက်ရုံဧရိယာ	HR မန်နေဂျာနှင့် ပတ်ဝန်းကျင်ဆိုင်ရာ စီမံခန့်ခွဲမှုအဖွဲ့
25	အရေးပေါ်သဘာဝ ဘေးအန္တရာယ်များ	<ul> <li>မီးသတ်ပစ္စည်းများအားစစ်ဆေးခြင်း</li> <li>သင်တန်းအခြေအနေနှင့်တက်ရောက်သူများ စာရင်းအား မှတ်တမ်းတင်ခြင်း</li> <li>ဘေးအန္တရာယ်ရှိသောပစ္စည်းများကိုင်တွယ် ခြင်းနှင့်စီမံခန့်ခွဲမှုများအား မှတ်တမ်းတင် ခြင်း</li> <li>အရေးပေါ်တုံ့ပြန်မှုလုပ်ငန်းများအား စစ်ဆေး ခြင်းနှင့် မှတ်တမ်းတင်ခြင်း</li> <li>စီမံကိန်းဧရိယာတစ်ဝိုက်ရှိမြောင်းများအား စစ်ဆေး ခြင်းနှင့် မှတ်တမ်းတင်ခြင်း</li> <li>စီခံကိန်းဧရိယာတစ်ဝိုက်ရှိမြောင်းများအား စစ်ဆေးခြင်းနှင့် မှတ်တမ်းတင်ခြင်း</li> <li>အရေးပေါ်တုံ့ပြန်မှုအစီအစဉ်အား မှတ်တမ်း</li> </ul>	တစ်နှစ်လျှင် ၂ ကြိမ် သို့မဟုတ် လိုအပ်သလို	စစ်ဆေးခြင်း	စက်ရုံဝင်းအတွင်း	အရေးပေါ် တုံ့ပြန်ရေး အဖွဲ့ နှင့် ပတ်ဝန်း ကျင်ဆိုင်ရာစီမံခန့်ခွဲ မှုအဖွဲ့

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှ ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
		တင်ခြင်း				
		<ul> <li>စစ်ဆေးမှုအချက်အလက်များအား မှတ်တမ်း</li> </ul>				
		တင်ခြင်း				
		လုပ်	ပ်ငန်းဖျက်သိမ်းခြင်းကာဂ	o .		
Э	လေထုအရည်	ပတ်ဝန်းကျင်ဆိုင်ရာ လေထုအရည်အသွေး	တစ်ကြိမ်	စက်ကိရိယာများ	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
	အသွေး			ဖြင့် တိုင်းတာခြင်း		ကန်ထရိုက်တာ
		ဖုန်မှုန့်ထုတ်လုပ်ခြင်း	တစ်ကြိမ်	အမြင်ဖြင့်စစ်ဆေး	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
				ခြင်း		ကန်ထရိုက်တာ
		အိတ်ဇောဓာတ်ငွေ့များ	အပတ်စဉ်	အမြင်ဖြင့်စစ်ဆေး	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
				ခြင်း		ကန်ထရိုက်တာ
		မော်တော်ယာဉ်များ၊ စက်ယန္တရားများ ပြုပြင်	လိုအပ်လျှင်လိုအပ်	ပြုပြင်ထိန်းသိမ်းမှု	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
		ထိန်းသိမ်းခြင်း	သလို	မှတ်တမ်း		ကန်ထရိုက်တာ
J	ဆူညံသံအဆင့်	ပတ်ဝန်းကျင်ဆိုင်ရာဆူညံသံအဆင့်	တစ်ကြိမ်	စက်ကိရိယာများ	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
				ဖြင့် တိုင်းတာခြင်း		ကန်ထရိုက်တာ
		မော်တော်ယာဉ်များ၊ စက်ယန္တရားများနှင့် စက်	လိုအပ်လျှင်လိုအပ်	ပြုပြင်ထိန်းသိမ်းမှု	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
		ကိရယာများကို ပြုပြင်ထိန်းသိမ်းခြင်း	သလို	မှတ်တမ်း		ကန်ထရိုက်တာ
5	ရေနှင့်စွန့်ပစ်ရည်	သောက်ရေနှင့်သုံးရေတို့၏ရေအရည်အသွေး	တစ်ကြိမ်	ဓာတ်ခွဲစမ်းသပ်	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
	အရည်အသွေး			ခြင်း		ကန်ထရိုက်တာ
		စွန့်ပစ်ရည်အရည်အသွေး	တစ်ကြိမ်	ဓာတ်ခွဲစမ်းသပ်	ပြင်ပမြောင်းသို့မစွန့်ပစ်မီ	ဖျက်သိမ်းရေး
				ခြင်း	နောက်ဆုံးရေထွက်ပေါက်	ကန်ထရိုက်တာ
		ယာယီရေကန်များအသုံးပြုခြင်း	အပတ်စဉ်	အမြင်ဖြင့်စစ်ဆေး	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး
				<b>ි</b> ට්		ကန်ထရိုက်တာ

စဉ်	အမျိုးအစား	စောင့်ကြပ်ကြည့်ရှုရမည့် အရာများ	စောင့်ကြပ်ကြည့်ရှုမှု ပြုလုပ်ရန်အကြိမ်	စောင့်ကြပ်ကြည့်ရှု ရေးနည်းလမ်း	နေရာ	တာဝန်ရှိသူ
		စွန့်ပစ်ရည်များစုဆောင်းခြင်း	လစဉ်	ရေဆိုးစုဆောင်း ရေး ပြေစာ မှတ်တမ်း	ယာယီမိလ္လာကန်များ	ဖျက်သိမ်းရေး ကန်ထရိက်တာ
9	မြေထုအရည် အသွေး	မြေ	တစ်ကြိမ်	ဓာတ်ခွဲစမ်းသပ် ခြင်း	စက်ရုံဝင်းအတွင်း	ဖျက်သိမ်းရေး ကန်ထရိုက်တာ

အဆိုပြုစီမံကိန်း၏လုပ်ငန်းလည်ပတ်စဉ်နှင့်ဖျက်သိမ်းခြင်းကာလများတွင် ပတ်ဝန်းကျင်စောင့်ကြပ်ကြည့်ရှုရေးရန်ပုံငွေတို့ကို ၁၆,၂၅၀,၀၀၀ ကျပ်နှင့် ၃,၄၅၀,၀၀၀ ကျပ် အသီးသီးလျာထားပါကြောင်းနှင့် အသေးစိတ်အချက်အလက်များကို အပိုဒ် ၈–၂ တွင် တင်ပြထားပါသည်။

### ၁–၈။ အများပြည်သူနှင့် တွေ့ဆုံဆွေးနွေးခြင်းနှင့် ထုတ်ဖော်ကြေညာခြင်း

အဖွဲ့လိုက်တွေ့ဆုံဆွေးနွေးမှုများတွင် စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံခြင်းနှင့် သက်ဆိုင်ရာအစိုးရအဖွဲ့ အစည်းများနှင့် စီမံကိန်းအနီးနေထိုင်သူ ဒေသခံပြည်သူများနှင့် တွေ့ဆုံဆွေးနွေး၍ အကြံပြုချက်များရယူခြင်း ဟူ၍ နည်းနှစ်နည်းရှိပါသည်။

#### ၁–၈–၁။ စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံခြင်း

၂၀၂၁ ခုနှစ် မတ်လ ၁၂ ရက်နေ့တွင် Myanmar Asia Optical International (MAOI) ကုမ္ပဏီလီမိတက်၏စက်ရုံထမင်းစားဆောင်၌ စက်ရုံလုပ်သားဝန်ထမ်းများနှင့် တွေ့ဆုံဆွေးနွေးမှုကို ဆောင်ရွက်ခဲ့ပါသည်။ တက်ရောက်သူဦးရေ ၂၄၂ ဦးစာရင်းရရှိခဲ့ပြီး အကြံပြုလွှာများ ရရှိ ခဲ့ပါသည်။





ပုံ ၁–၁၃ စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံဆွေးနွေးပွဲမှ ဓာတ်ပုံများ

စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံဆွေးနွေးခြင်းဆိုင်ရာ အသေးစိတ်အချက်အလက်များမှာ အောက်ပါ အတိုင်းဖြစ်သည်။

eယား ၁−၅ စက်ရုံဝန်ထမ်းများနှင့်တွေ့ဆုံဆွေးနွေးခြင်းဆိုင်ရာ အချက်အလက်များ

စဉ်	၌ ကိစ္စရပ်များ အကြံပြုချက်များ/မှတ်ချက်များ		စက်ရုံဘက်မှတုံ့ပြန်ချက်များ
(c)	<b>ပုပ်ငန်းခွင်ကျန်းမာရေး</b> နှင့်	<del>၂</del> က်	
၁.၁	လုပ်ငန်းခွင်သုံးအကာ	• တက်ရောက်လာသူအားလုံးကလုံ	🗸 ဝန်ထမ်းများအားလုံးများအားလုံးကို

စဉ်	ကိစ္စရပ်များ	အကြံပြုချက်များ/မှတ်ချက်များ	စက်ရုံဘက်မှတုံ့ပြန်ချက်များ				
	အကွယ်ပစ္စည်းများ	လောက်စွာထောက်ပံ့ပေးထားကြောင်း ဖော်ပြခဲ့သည်။	PPE များထောက်ပံ့ပေးထားပါသည်။				
၁.၂	သောက်ရေ	■ တက်ရောက်လာသူအားလုံးကသောက် ရေများလုံလောက်စွာရရှိကြောင်း ဖော် ပြထားပါသည်။	<ul> <li>✓ ကုမ္ပဏီသည်ကျန်းမာရေးနှင့်ညီညွတ်</li> <li>သောသောက်ရေကို ထောက်ပံ့ထား</li> <li>ပေးပြီး ရေအရည်အသွေးကို နှစ်စဉ်</li> <li>စစ်ဆေးပါသည်။</li> </ul>				
၁.၃	မိလ္လာစနစ်	<ul> <li>လူအားလုံးသည်ကောင်းမွန်ပြီးလုံ</li> <li>လောက်သည်ဟု ဖော်ပြထားပါသည်။</li> </ul>	<ul><li>✓ စက်ရုံရှိအိမ်သာ၊ စားသောက်ဆောင်</li><li>နှင့် အများသူ၄ာနေရာများတွင် ဆပ်</li></ul>				
э.ç	ဆေးကြောသန့် စင်ခြင်း စနစ်	<ul> <li>အစည်းအဝေးသို့တက်ရောက်လာသူ         များမှ ဆပ်ပြာနှင့်လက်သန့်ဆေးရည်         များထောက်ပံ့ပေးထားကြောင်း ဖော်ပြ         ထားပါသည်။</li> </ul>	ပြာနှင့်လက်သန့်ဆေးရည်များ ထား ပေးထားပါသည်။				
(J) o		ကိုင်မှုအခြေအနေနှင့်စပ်လျဉ်း၍ အ <u>ကြံပြု</u> ချက်					
J.3	လုပ်ငန်းခွင်ဆူညံသံ	<ul> <li>တက်ရောက်လာသူဝန်ထမ်းများအနက်</li> <li>၄၀ဦးမှဆူညံမှုမရှိကြောင်းဖော်ပြထား</li> <li>သော်လည်း ၇ဦးမှာမူ အနည်းငယ်ရှိ</li> <li>ကြောင်းဖော်ပြထားပါသည်။</li> </ul>	<ul> <li>✓ ဆူညံသံကိုလစဉ်စောင့်ကြည့်ပါ</li> <li>သည်။</li> <li>✓ ဆူညံသံသတ်မှတ်ချက်ထက်ကျော်</li> <li>လွန်သောလုပ်ငန်းခွင်တွင် လုပ်ကိုင်</li> <li>ရသောဝန်ထမ်းများအတွက်နားကြပ်</li> <li>နှင့်နားအစွပ်များပေးထားပါသည်။</li> </ul>				
7.7	အနံ့ <b>ဆိုး</b>	<ul> <li>တက်ရောက်လာသူဝန်ထမ်းများအနက်</li> <li>၄၅ဦးမှအနံ့မရှိကြောင်းဖော်ပြထား</li> <li>သော်လည်း ၂ဦးမှာမူ အနံ့အနည်းငယ်ရှိ</li> <li>ကြောင်းဖော်ပြထားပါသည်။</li> </ul>	✓ လေဝင်/လေထွက်စနစ်ကို ပုံမှန် လစဉ် သန့်ရှင်းပေးပါမည်။				
7.5	လုပ်ငန်းခွင်ရှိအလင်း ရောင်	<ul> <li>အားလုံးမှအဆင်ပြေကြောင်းဆွေးနွေး</li> <li>ထားပါသည်။</li> </ul>	<ul> <li>✓ ကုမ္ပဏီလုပ်ငန်းခွင်နေရာတိုင်းတွင်</li> <li>စံချိန်မီမီးချောင်း/မီးအိမ်များ လုံ</li> <li>လောက်စွာတပ်ဆင်ထားပါသည်။</li> </ul>				
J·9	လုပ်ငန်းခွင်ရှိအမှုန် အမွှား/ဖုန်မှုန့်များ	• တက်ရောက်လာသူ(၉)ဦးမှအမှုန်အမွှား မရှိဟုဖော်ပြထားပြီး (၈)ဦးမှအနည်း ငယ်ရှိသည်ဟု ဖြေကြားထားပါသည်။	<ul> <li>✓ လုပ်ငန်းခွင်တွင်းရှိဝန်ထမ်းများအား</li> <li>နှာခေါင်းစည်းများတပ်ဆင်စေပြီး</li> <li>အမှုန်အမွှားများကိုလည်း ပုံမှန်သန့်</li> <li>ရှင်းရေးလုပ်ပေးပါမည်။</li> </ul>				
J-9	လုပ်ငန်းခွင်လေဝင်/ လေထွက်စနစ်	■ အားလုံးမှအဆင်ပြေကြောင်းဆွေးနွေး ထားပါသည်။	<ul> <li>✓ လုပ်ငန်းခွင်အတွင်း လေဝင်/လေ</li> <li>ထွက်ကောင်းမွန်စေရန် အိတ်ဇော</li> <li>စနစ်နှင့်လေအေးပေးစနစ်များ တပ်</li> <li>ဆင်ထားပါသည်။</li> </ul>				
1510	(၃) လုပ်ငန်းခွင်လူမှုဆက်ဆံရေးအခြေအနေနှင့်စပ်လျဉ်း၍ အကြံပြုချက်						

စဉ် ကိစ္စရပ်များ အကြံပြုချက်များ/မှတ်ချက်များ	စက်ရုံဘက်မှတုံ့ပြန်ချက်များ
၃.၁ ဝန်ထမ်းအချင်းချင်း မိမိအထက်လူကြီးများနှင့် အဆင်ပြေ 🗸 ပေါင်းသင်းဆက်ဆံရေး ကြောင်းဖော်ပြထားပါသည်။	2 2 6 6 2 2 2 3

### ၁–၈–၂။ သက်ဆိုင်ရာအစိုးရအဖွဲ့ နှင့်စက်ရုံနီးချင်းများနှင့် တွေ့ဆုံညှိနှိုင်းဆွေးနွေးခြင်း

၂၀၂၁ခုနှစ်၊အောက်တိုဘာလ (၁၆) ရက်နေ့တွင် မင်္ဂလာဒုံစက်မှုဥယျာဉ်(MIP)၏စက်မှုဇုန် စီမံခန့်ခွဲမှုကော်မတီရုံး၌ လူထုတွေ့ဆုံဆွေးနွေးပွဲကို ကျင်းပပြုလုပ်ခဲ့ပါသည်။ ထိုအစည်းအဝေးပွဲသို့ ဇုန်ကော်မတီရုံးမှတာဝန်ရှိသူများ၊ သက်ဆိုင်ရာအစိုးရအဖွဲ့ အစည်းများ၊ စက်ရုံအနီးတစ်ဝိုက်မှတာဝန် ရှိသူများ၊ စက်ရုံ(၂)ရုံလုံးတို့မှတာဝန်ရှိသူများနှင့် တတိယအဖွဲ့ အစည်းတို့ တက်ရောက်ခဲ့ကြပြီး အကြံ ပြုစာများ ရယူခဲ့ပါသည်။









ပုံ ၁–၁၄ သက်ဆိုင်ရာအစိုးရအဖွဲ့ နှင့်စက်ရုံနီးချင်းများနှင့် တွေ့ဆုံညှိနှိုင်းဆွေးနွေးခြင်းမှ ဓာတ်ပုံများ

# eယား ၁-၆ အစည်းအဝေးပွဲမှဆွေးနွေးချက်များ

စဉ်	အကြံပြုဆွေးနွေးသူမှဆွေးနွေးချက်များ	ပြန်လည်ရှင်းလင်းဖြေကြားမှုများ
၁	ဒေါ်ညိုလင်းထက် (ဒုတိယဦးစီးမှူး)	ဦးကျော်စိုးဝင်း (အုပ်ချုပ်မှုဒါရိုက်တာ)
	ရန်ကုန်မြောက်ပိုင်းခရိုင်၊ ပတ်ဝန်းကျင်ထိန်းသိမ်း	Green Myanmar Environmental Services Co.,
	ရေးဦးစီးဌာန	Ltd
	<ul> <li>ပတ်ဝန်းကျင်ဆိုင်ရာအဖွဲ့ ကို စက်ရုံတွင်ဖွဲ့ စည်း</li> </ul>	• စက်ရုံများအနေဖြင့် မိမိတို့၏စက်ရုံတွင်
	ထားရန်နှင့် ယင်းအဖွဲ့အစည်းမှ ဝန်ထမ်းများ	Pollution Control Manager (သို့မဟုတ်)
	သို့ ပတ်ဝန်းကျင် ဆိုင်ရာအသိပညာပေးဆောင်	Safety Officer ကဲ့သို့သော ကျွမ်းကျင်ဝန်ထမ်း
	ရွက်မှုများနှင့် သင်တန်းပို့ချခြင်းများကို လုပ်	များကို ခန့်အပ်ထားရန်လိုအပ်ပါကြောင်း၊
	ဆောင်သင့်ကြောင်း၊	• ထိုကျွမ်းကျင်ဝန်ထမ်းများအနေထြင့် သက်ဆိုင်
	<ul> <li>ပတ်ဝန်းကျင်ဆိုင်ရာထိန်းသိမ်းစောင့်ရှောက်မှု</li> </ul>	ရာစက်ရုံများရှိဝန်ထမ်းများ၏လုပ်ငန်းခွင်ဆိုင်
	များနှင့်ပတ်သက်၍ ပိုမိုသိရှိလိုပါက ပ <b>တ်ဝန်း</b>	ရာဘေးအန္တရာယ်ကင်းရှင်းရေးနှင့် ပတ်ဝန်းကျင်
	ကျင်ထိန်းသိမ်းရေးဦးစီးဌာန၏ဝက်(ဘ်)ဆိုဒ်	ဆိုင်ရာထိန်းသိမ်းစောင့်ရှောက်မှုများကို ဆောင်
	နှင့် လူမှုကွန်ယက်စာမျက်နှာများတွင် ဝင်	ရွက်ရန်လိုအပ်ပါကြောင်း၊
	ရောက်လေ့လာနိုင်ပါကြောင်း၊	<ul> <li>ဆွေးနွေးပွဲသို့တက်ရောက်လာသူများအနေဖြင့်</li> </ul>
	<ul> <li>ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဦးစီးဌာနမှချမှတ်</li> </ul>	လည်း ကိုယ်တိုင်ကိုယ်ကျဆွေးနွေးလိုခြင်းမရှိပါ

စဉ်	အကြံပြုဆွေးနွေးသူမှဆွေးနွေးချက်များ	ပြန်လည်ရှင်းလင်းဖြေကြားမှုများ
	ထားသောလမ်းညွှန်ချက်များအတိုင်း လိုက်နာ	က ဖြန့်ဝေထားသောအကြံပြုစာရွက်များတွင်
	ဆောင်ရွက်သင့်ပါကြောင်း၊	အကြံပြုချက်များကိုရေးသားနိုင်ပါကြောင်း
	<ul><li>စက်ရုံတွင်လုပ်ကိုင်နေကြသောဝန်ထမ်းများ</li></ul>	ပြောကြားခဲ့ပါသည်။
	အတွက် ကျန်းမာရေးစောင့်ရှောက်မှုဆိုင်ရာ	
	ကိစ္စရပ်များကို အလေးထားဆောင်ရွက်သင့်ပါ	
	ကြောင်း၊	
	<ul> <li>စက်ရုံလုပ်ငန်းအတွက်လိုအပ်သောလုပ်ငန်း</li> </ul>	
	လိုင်စင်များကို သက်ဆိုင်ရာဌာနများသို့တင်ပြ	
	၍ခွင့်ပြုချက်တောင်းခံပြီး လိုက်နာလုပ်ဆောင်	
	သင့်ကြောင်း အကြံပြုအပ်ပါသည်။	

## ဖယား (၇) အကြံပြုစာရွက်များမှဖော်ပြချက်များ

စဉ်	အမည်	အကြံပြုဆွေးနွေးချက်များ	
Э	ဦးအောင်သူ	🗲 ပတ်ဝန်းကျင်စီမံခန့်ခွဲမှုဆိုင်ရာအစီအစဉ်များသည် ကောင်းမွန်ပါသည်။	
J	ဒေါ်မေမျိုးရွှေ	🗲 ပတ်ဝန်းကျင်ထိခိုက်မှုမရှိစေရန် လုပ်ဆောင်ချက်များအဆင်ပြေပါသည်။	
		≽ အဘက်ဘက်မှပြည့်စုံပါသည်။	
5	ဦးထွန်းလင်းကျော်	🕨 ဝန်ထမ်းလုပ်သားများ၏လူမှုရေး၊ကျန်းမာရေးနှင့်အလုပ်အကိုင်များတည်တံ့	
		ရေး၊ လုပ်ခလစာမပြတ်ရရှိနိုင်ရေးအတွက် ကြိုးပမ်းဆောင်ရွက်ပေးစေချင်ပါ	
		သည်။	
9	ဦးသက်မျိုးထိုက်	≽ Wastewater treatment system ထားရှိသည်ကိုတွေ့ ရှိရပါသည်။	
		≽ Green Myanmar ၏ Analysis အရ ရေ၏ pH level သည် ၆.၃၅ ဖြစ်နေပါ	
		သည်။	
		≽ Chemical များသုံးစွဲမှုရှိသဖြင့် Wastewater treatment system အား	
		> Plastic Injection စက်များလည်ပတ်နေပါသဖြင့် အနံ့အတွက် လေဝင်/လေ	
		ထွက်စနစ်ကိုကောင်းမွန်စေပြီး ထိန်းသိမ်းမှုပြုလုပ်သင့်ပါသည်။	
		<ul><li>လုပ်ငန်းခွင်နှင့်ပတ်ဝန်းကျင်ကိုထိန်းသိမ်းနိုင်ရန် Chemical management</li></ul>	
		plan များရေးဆွဲအကောင်အထည်ဖော်ပြီး လုပ်ဆောင်သင့်ပါသည်။	
၅	ဒေါ် ဧင်မာလှိုင်	🗲 အကြံပြုချက်များမရှိပါ။	
G	ဒေါ်မေချမ်းခိုင်	≽ အကြံပြုချက်များမရှိပါ။	
૧	ဒေါ်မေအေး	🗲 အစိုးရမှထုတ်ပြန်ထားသောဥပဒေများနှင့်စည်းမျဉ်းများအတိုင်း လိုက်နာ	
		ဆောင်ရွက်ပေးပါရနိ	
၈	ဒေါ်ညိုလင်းထက်	🗲 ဓာတုပစ္စည်းများအသုံးပြုကိုင်တွယ်ခြင်းအတွက် သက်ဆိုင်ရာဌာနမှ လိုင်စင်	
		လျှောက်ထားရယူရန်	
		🗲 စွမ်းအင်အသုံးပြုမှု နေ့စဉ်/လစဉ်ပမာဏအား ထည့်သွင်းဖော်ပြရန်	
		🗲 လုပ်ငန်းခွင်မှစွန့်ပစ်ရည်၊အခိုးအငွေ့ထုတ်လွှတ်မှုနှင့် ဆူညံသံများကို အမျိုး	
		သားပတ်ဝန်းကျင်ဆိုင်ရာအရည်အသွေး (ထုတ်လွှတ်မှု) လမ်းညွှန်ချက်များ	
		နှင့်အညီ လိုက်နာဆောင်ရွက်ရန်	

စဉ်	အမည်	အကြံပြုဆွေးနွေးချက်များ
		🗲 ဝန်ထမ်းများအား ပတ်ဝန်းကျင်ဆိုင်ရာအသိပညာများ ဖြန့်ဝေပေးရန်နှင့်
		ယင်းတို့ကို ရန်ကုန်တိုင်းဒေသကြီး၊ပတ်ဝန်းကျင်ထိန်းသိမ်းရေးဦးစီးဌာန၏
		Facebook စာမျက်နှာပေါ်တွင် ဝင်ရောက်လေ့လာနိုင်ပါကြောင်း ဆွေးနွေး
		အကြံပြုပါသည်။

### ၁–၉။ နိဂုံးနှင့်အကြံပြုချက်များ

ပတ်ဝန်းကျင်ဆိုင်ရာစီမံခန့်ခွဲမှုအစီအစဉ် (EMP) အစီရင်ခံစာကို ပြင်ဆင်စဉ်ကာလအတွင်း ပတ် ဝန်းကျင်အပေါ်ဆိုးကျိုးသက်ရောက်မှုများသည် ဒေသအတွင်းတွင်ဖြစ်ပေါ်နိုင်ကြောင်းနှင့် လုပ်ငန်းလည်ပတ် စဉ်စွန့်ပစ်ပစ္စည်းများထုတ်လွှတ်မှု၊ မီးလောင်လွယ်သောစွန့်ပစ်ပစ္စည်းများထွက်ရှိနိုင်မှုများကို တွေ့ရှိခဲ့သော် လည်း ယင်းတို့ကိုလုံလောက်သော ထိန်းသိမ်းဆောင်ရွက်မှုများရှိကြောင်းတွေ့ရှိရသဖြင့် ပတ်ဝန်းကျင်အပေါ် သက်ရောက်မှုများသည် လက်ခံနိုင်သည့်အတိုင်းအတာအတွင်းရှိကြောင်း တွေ့ရပါသည်။

အဆိုပြုစီမံကိန်းသည် လေထုညစ်ညမ်းမှုနှင့်အမှုန်အမွှားထွက်ရှိခြင်းတို့အပေါ် ပတ်ဝန်းကျင်စောင့် ကြပ်ကြည့်ရှုခြင်းနှင့် ထိခိုက်မှုများကိုလျော့နည်းစေရန် ဆောင်ရွက်ခြင်းတို့ဖြင့် ဆိုးကျိုးတရားများကို လျော့ နည်းစေပြီး လူမှုစီးပွားတိုးတက်စေမည့် စီမံကိန်းတစ်ခုဖြစ်ကြောင်း တင်ပြအပ်ပါသည်။

#### 1.0 EXECUTIVE SUMMARY

#### 1.1 Introduction

Myanmar Asia Optical International Company Limited (MAOI) is a wholly foreign owned investment by Asia Optical International Limited (99%) from British Virgin Island and Mr. Yuzo Asano (1%) from Japan. It is incorporated and registered in Myanmar having registration number of 147842228 (26.3.2003).

There are two factories:

- Factory-1 operates for manufacturing of all kinds of lens and
- ➤ Factory-2 operates for manufacturing of plastic parts for camera and Selffocus Lens Array (SLA).

This environmental management plan (EMP) report is prepared for factory-2, which is located at Plot No. (C1, C2), Mingaladon Industrial Park, Mingaladon Township, Yangon Region, Myanmar.

In February 2020, Green Myanmar Environmental Services Company Limited (GMES) was requested by Myanmar Asia Optical International Company Limited (MAOI) to provide professional consultation service to "Manufacturing of all kinds of Lens, Lens Units, Optical Apparatuses, Electronic Apparatuses, SLA, Plastic Parts for Electronic Apparatuses and other Apparatuses on CMP Basis" Project and assist the submission of the Environmental Management Plan (EMP) Report to the Environmental Conservation Department (ECD), Ministry of Natural Resources and Environmental Conservation (MONREC).

#### 1.2 Proponent Information

1.	Project Name	Manufacturing of all kinds of Lens, Lens Units, Optical
		Apparatuses, Electronic Apparatuses, SLA, Plastic Parts for
		Electronic Apparatuses and other Apparatuses on CMP Basis
2.	Project Proponent	Myanmar Asia Optical International (MAOI) Company Limited
3.	Address of Project	Plot No. (C1, C2), Mingaladon Industrial Park, Mingaladon
		Township, Yangon Region, Myanmar
4.	Company Registration	147842228
	Number	
5.	Established Time	26.3.2003
6.	Date of Test Run	March 2004
7.	Date of Commercial Run	1.7.2004
8.	Validity of Investment	45 years
	Permit	
9.	Type of Proposed	Manufacturing
	Business	
10.	Type of Investment	100% Foreign Investment
	Amount of Foreign	USD 12.880 Million
	Capital	
	Total Amount of	USD 23.558 Million
	Investment	

	Number of Sharers	45,123 Shares	
	Type of Share	Ordinary (USD 6,000 per one share)	
11.	Geographical Information	North Latitude 16° 56' 27.56"	
		East Longitude 96° 09' 26.33"	
12.	Type of Land	Industrial Land	
13.	Land Acquisition	Lease Land	
14.	Land Owner/Lessor	Mingaladon Industrial Park Co., Ltd.	
15.	Lessee	Myanmar Asia optical International Co., Ltd. (MAOI)	
16.	Factory Area	36,622.88 m <sup>2</sup>	
17.	Surrounding Environment	East Side Designtime Myanmar Co., Ltd.	
		West Side Linda Fashion Myanmar	
		Left Side Myanmar Postarion Co., Ltd.	
		Right Side Myanmar DYC Shoes Factory	
18.	Water Source	Tube well (6" x 600') 2 units	
		MIP Water Supply Tap 1 units	
19.	Source of Electrical	From National Grid	
	Power		
20.	Power Supply	1 unit of transformers	
		Generators	
		1,000 kVA Diesel engine (one unit)	
		1,500 kVA Diesel engine (two units)	
21.	Raw Materials	Raw Materials for Plastic Packing Processing	
		> PE/PE Film	
		> Transparent Acrylic Board	
		<ul><li>Anti-static Mat</li><li>Masking Tape</li></ul>	
		➤ Black Sanding Pad	
		> Anti-static Curtain	
		➤ Ultrasonic Generator	
		➤ Blister Sprinkler	
		➤ Adsorption Mold Gypsum Powder	
		➤ PET /PET Sheet	
		> Paper Box	
		Raw Materials for Camera Production	
		<ul> <li>Plastic Granule PC-GSH2020R2-979G</li> <li>Plastic Granule PC-LS3302-K24235</li> </ul>	
		➤ Plastic Granule PC-GSH2020LR-Y083	
		➤ Plastic Granule PC-GF1210-BLK	
		Box	
		> PE Plastic	
		➤ Blister Pack	
		Dummy Plate	
		Raw Materials for SLA Production	
		Self-Focus Lens Array Rod	
		<ul><li>Fiber Reinforced Plastic</li><li>Sponge Pad</li></ul>	
		<ul><li>Sponge Pad</li><li>Paper Pad</li></ul>	
		> Paper Box	
L		- aper 2011	

22.	Raw Materials Imported from	<ul> <li>➢ Paper Pallet</li> <li>❖ Chemicals</li> <li>➢ Ethyl Alcohol</li> <li>➢ Acetone</li> <li>➢ Rare Earth Polishing Powder</li> <li>➢ Lapping Emery</li> <li>➢ Optical Adhesive A-01</li> <li>➢ Cutting Fluid</li> <li>➢ G 17 Adhesive</li> <li>➢ Metal Polish</li> <li>China (Hong Kong) and Japan</li> </ul>			
23.	Products	Plastic Parts for 0	Camera		
		Self-focus Lens	Array (SLA)		
24.	Products Exported to	China (Hong Kor			
	Production Capacity	Plastic Parts for C	Camera	1,251,	800 Pcs per month
		Self-focus Lens	Array (SLA)	25,600	0,000 Pcs per year
24.	Work Force	Oversea Employe	ees - 13		
		Local Employees			
		Total	- 178		
25.	Working Hours	8 hours per day (	Management Of	fice and l	Factory)
	Working Days	6 days per week			
	Working Time	Management Office One Shift 7:30 a.m. ~ 4:30 p.m. (Monday to Saturday) (Lunch Break: 11:30 a.m. ~ 12:30 p.m.)			
		Factory Operati	ion		
		Two Shift (Day S		Shift)	
			<u>Day Shi</u>		Night Shift
		Monday~	7:30 a.m. ~ 4:		7:30 p.m. ~ 4:00 a.m.
		Saturday			
		Break	11:30 a.m.~12	•	11:30 p.m. ~ 12:00 a.m.
26	Y CD	Overtime (OT)	4:00 p.m.~7:3		4:00 a.m. ~ 7:30 a.m.
26.	List of Directors	Name Citizanshin	- Mr. Yuzo A	sano	
		Citizenship Passport No.	<ul><li>Japanese</li><li>TZ 1187753</li></ul>	2	
		Designation	- 12 1167735 - Managing D		
		Designation	managing L	riccioi	
		Name	- Mr. Chen, H	Ian-Jung	
		Citizenship	- Chinese		
		Passport No.	- 314993106		
		Designation	- Director		
27.	Contact Details	Project Address			galadon Industrial Park,
			Mıngaladon To	ownship,	Yangon Region,

			Myanmar
		Telephone	09-5173541
		Email	mao80@asiaoptical.com.mm,
			maoiimexp2@gmail.com
28.	Contact Person for EMP	Name	Daw May Chan Khine
	Report Preparation	Designation	Line Leader
			(Admin Department, Import/Export Section)
		Telephone	09420092281
		Email	maoiimexp4@gmail.com

#### **Environmental Management Plan (EMP) Study Team**

Green Myanmar Environmental Services Company Limited (GMES) is Environmental Management Plan (EMP) study team, registered in ECD having Transitional Consultant Registration Number of Organization No.0006. GMES formed the EMP study team for this project as shown in the following Table.

Table 1-1 Organization of the GMES's EMP Study Team

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
1.	Team Leader	<ul><li>Overall management of EMP</li></ul>	Engr. U Kyaw Soe Win
		operation	Managing Director
		■ Work plan	Green Myanmar
		■ Technical meeting & workshop	Environmental Services Co.,
		<ul><li>Document reviewing and</li></ul>	Ltd.
		process flow studying	
		<ul><li>Lead and facilitation of public</li></ul>	Experience in EMP
		consultation	processing
		<ul><li>Data compilation and analysis</li></ul>	
		<ul><li>Coordination with stakeholders</li></ul>	No.0019
2.	Technical • Design of EMP		Daw Kyaw Kyaw Win
	Advisor	■ Technical meeting and workshop	Retired Director
		<ul><li>Monitoring of EMP process</li></ul>	Myanmar Petrochemical
		<ul><li>Public consultation meeting</li></ul>	Enterprise, Ministry of
		<ul><li>Quality control and check</li></ul>	Electricity and Energy
		<ul><li>Data compilation and analysis</li></ul>	
3.	Environmental	■ Advise on the design of EMP	Engr. Daw Khin Swe Aye
	Consultant	■ Develop term of reference for	Former Lecturer,
		duty and responsibility among	Chemical Engineering Dept.,
		EMP team	Yangon Technological
		■ Advise on the environmental	University
		baseline	
		<ul><li>Advise on the field survey</li></ul>	No.0021
		■ Facilitate technical analysis	

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
		<ul><li>Streamline the Environmental Management Plan (EMP)</li></ul>	
4.	Consultant (Air Quality Management)	<ul> <li>Give advice on collecting field data for air quality</li> <li>Assist on air quality control system</li> <li>Give advice on air pollution evaluate and mitigation</li> <li>Give advice for data processing, computing, projection, modeling</li> </ul>	Engr. U Sein Thaung Oo Chairman Green Myanmar Environmental Services Co., Ltd.
5.	Consultant (Wastewater Management)	<ul> <li>and analysis</li> <li>Give advice in report preparation</li> <li>Collecting field data for project activities and municipal waste</li> <li>Assist in laboratory testing</li> <li>Data processing, computing, projection, modeling and analysis</li> <li>Assist in report preparation</li> </ul>	Engr. Daw Tin May Soe Retired Professor & Head, Chemical Engineering Dept., Mandalay Technological University  Experience in environmental toxicology and pollution control
			No.0028
6.	Consultant (Laboratory Analysis)	<ul> <li>Advise on data processing and laboratory testing</li> <li>Prepare instruction for laboratory testing</li> <li>Check the result of environmental laboratory testing</li> <li>Compare the laboratory result and verification</li> </ul>	U Myo Myint Retired Factory Manager Ministry of Industry (1) No.0026
7.	Consultant (Environmental Quality Management)	<ul> <li>Assist in preparation of guideline for environmental sampling of air and water quality</li> <li>Monitor the sample collection</li> <li>Register and inspect the sample collected</li> <li>Assist in report preparation for environmental baseline</li> </ul>	Daw Khin Shwe Htay Former Lecturer, Chemical Engineering Dept., Yangon Technological University Environmental Engineer No.0022

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
8.	Social Operation and Field Coordinator	<ul> <li>Facilitate the technical meeting and record keeping</li> <li>Assist in data mining and secondary data collection</li> <li>Coordinate with local authority and communities</li> </ul>	U Khin Aung Social Specialist Green Myanmar Environmental Services Co., Ltd. No.0025
9.	Field Supervisor	<ul> <li>Develop operational checklist for environmental study</li> <li>In charge for preliminary field visit</li> <li>Supervise field survey</li> <li>Finalize checking for report and report formatting</li> </ul>	U Kyi Han Bo B.E (Aerospace Fuel and Propellant Engineer)
10.	Environmental Experts	<ul> <li>Data collection</li> <li>Document reviewing</li> <li>Process studying</li> <li>Preparation of impact evaluation and assessment, and management plan</li> <li>Report preparing and formatting</li> </ul>	Daw Aye Thuzar Hein B.E (Chemical)  Daw Hnin Htet Htet Hlaing B.E (Port and Harbor)  Daw Wai Wai Mon B.E (Port and Harbor)  Daw No No Hnin Nu Nway B.E (Port and Harbor)
11.	Environmental Monitoring Team	<ul> <li>Environmental baseline measuring</li> <li>Data analysis</li> <li>Environmental baseline mapping</li> <li>Environmental baseline report preparing and formatting</li> </ul>	U Pyae Phyo Kyaw B.Sc (Forestry) (Monitoring Team Leader)  U Myo Thet Naung B.E (Aerospace Fuel and Propellant Engineer) (Assistant Team Leader) U Aung Ko Min B.E (Chemical) (Monitoring Technician)  U Thiha Zaw (Assistant Monitoring Technician)

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
12.	Public	<ul> <li>Assist in stakeholder meeting</li> </ul>	U Aung Kyaw Than
	Coordinator	■ Document preparation and	B.E (Chemical)
		invitation	
		<ul><li>Preparation of document for</li></ul>	
		public consultation meeting	
		■ Taking suggestion from public	
		consultation meeting	
13.	Laboratory	<ul><li>Preparation for water and</li></ul>	Daw Cherry Thwin
	Experts	wastewater sampling	B.E (Chemical)
		<ul><li>Preparation for laboratory testing</li></ul>	Laboratory Manager
		<ul><li>Laboratory testing</li></ul>	
		■ Reporting for laboratory results	U Thet Min Paing
			B.E (Chemical)
			Laboratory Techanician

#### 1.3 Policy, Legal and Institutional Framework

Chapter 3 of EMP report is policy, legal and institutional framework and it contains

- > Background
- > Policy Framework
- ➤ Myanmar Regulatory Framework in Environmental Assessment [details in National Environmental Policy of Myanmar (2019); Myanmar Agenda 21 (1997); National Sustainable Development Strategy (2009); The Environmental Conservation Law (2012); The Environmental Conservation Rules (2014); Environmental Impact Assessment Procedure (2015) and National Environmental Quality (Emission) NEQ(E)G Guidelines (2015)]
- ➤ Environmental -related Laws and Regulations in Myanmar
  [3 numbers of Administrative Sector; 3 numbers of City Development Sector; 5 numbers of Environmental Conservation Sector; 1 number of Culture and Heritage Sector; 4 numbers of Biodiversity and Ecosystem Sector; 4 numbers of Land Management; 2 numbers of Emergency/ Disaster Sector; 3 numbers of Finance and Revenue Sector; 1 number of National Planning and Economic Development; 6 numbers of Industrial Sector; 4 numbers of Health Sector; 1 number of Transportation Sector and 9 numbers of Workforce Sector are
- ➤ International Conventions, Treaties and Agreements

  There are 12 numbers of conventions, treaties and agreements in this heading.
- > Standards and Guidelines for the Surrounding Environment of the Project
  - Air Quality

shown]

Water Quality

- Noise Levels
- Light Intensity

#### 1.4 Description of the Project

There are three kinds of products manufactured in MAOI for export, which are various kind of optical lens, plastic parts for electronic apparatuses and self-focus lens array (SLA). Among them, plastic parts for camera and self-focus lens array (SLA) including plastic lens cases for various kind of optical lens are manufactured at factory-2.

Process flow diagram of these manufacturing processes in MAOI-2 and a brief description of each process steps in general are shown as below.

#### 1.4.1 Plastics Lens Case (Plastic Forming)

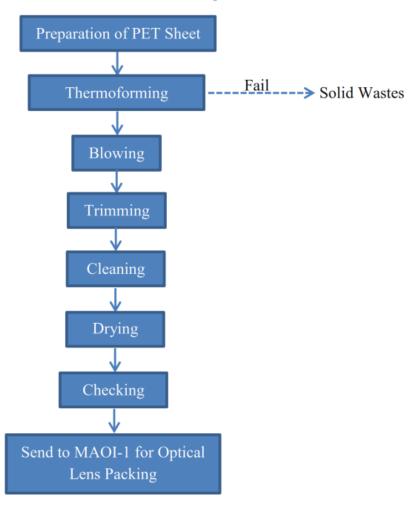


Figure 1-1 Process Flow Diagram of Optical Lens Cases Manufacturing Process

#### 1.4.2 Plastic Parts for Camera (Injection Molding Process)

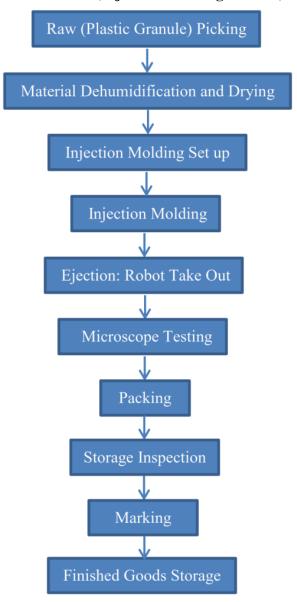


Figure 1-2 Process Flow Diagram of Plastic Parts Manufacturing Process

#### 1.4.3 Self-Focus Lens Array (SLA) (Glass Tube)



Figure 1-3 Process Flow Diagram of SLA Manufacturing Process

#### 1.5 Description of the Current Environmental and Social Conditions

For preparation of this EMP report, there are two methodologies to collect the data to describe the current environmental and social conditions of the proposed project.

- (i) Primary Data Collection and Analysis
- (ii) Secondary Data Collection and Analysis

**Primary Data Collection and Analysis:** The objective of the EMP baseline data collection is to present the general description of the environment as primary data collection. The methodology is designed to assess the baseline data of the environmental quality factors for "Myanmar Asia Optical International (MAOI) Company Limited" Project. Baseline environmental parameters are defined according to the guidelines, which apply to projects dedicated to the proposed project.

Environmental baseline data (primary data) such as air quality, light intensity, noise and vibration are measured by using instruments. For water quality, wastewater quality and soil quality, samples are collected and analyzed at the GMES laboratory and ALARM ecological laboratory. The results are mentioned in Chapter 5. All of the results are attached in Appendices.

All necessary criteria such as site selections for sampling and analysis of ambient air quality, workplace air quality, light intensity, noise level, water quality and soil quality were identified by GMES.

**Secondary Data Collection and Analysis:** Some data such as socioeconomic conditions, physical, biological environment and weather data are collected from the respective websites and reviewed by the EMP study team. The regional data of the Mingaladon Township was collected from the Township Data published by General Administration Department (GAD) in 2020.

#### 1.5.1 Environmental Baseline Situation (Primary Data)

#### (a) Air Quality

Air quality measurement was taken at the project site. The sampling points were selected based on their locations relative to key community receptors, as well as their current or potential for impairments.

- 1) Ambient air quality at the project site was measured at only one sampling point
- 2) Workplace (indoor) air quality was measured at six points and
- 3) Stack emission from diesel generator.

#### 1) Ambient Air Quality

There are three descriptions about the ambient air quality as follows.

#### **\*** Measured Parameters for Ambient Air Quality

No.	Parameters	Analysis Methods
1.	Sulfur dioxide (SO <sub>2</sub> )	Electrochemical sensors
2.	Nitrogen dioxide (NO <sub>2</sub> )	Electrochemical sensors
3.	Carbon dioxide (CO <sub>2</sub> )	NDIR (optional sensor)

No.	Parameters	Analysis Methods
4.	Carbon monoxide (CO)	Electrochemical sensors
5.	Hydrogen Sulfide (H <sub>2</sub> S)	Electrochemical sensors
6.	Particulate matter 2.5 (PM <sub>2.5</sub> )	Infrared light scattering
7.	Particulate matter 10 (PM <sub>10</sub> )	Infrared light scattering

Ambient air quality at the project site was measured continuously at only one sampling point for 24 hours.

# **❖** Location of Ambient Air Quality Measuring Point

Sr. No.	Measuring Points	Geographic Information	Description
1.	AMP	16° 56' 29.09" N	Near the entrance of the
		96° 09' 23.85" E	office at MAOI-2

AMP = Ambient Air Quality Measuring Point



Figure 1-4 Location of Ambient Air Quality Measuring Point



Figure 1-5 Status of Ambient Air Quality Measurement

# **\*** Measuring Results of Ambient Air Quality Baseline Data (AMP)

				National Environmental			
			Analys	sis Values	(Emissio	n) Quality	
No.	Parameters	Unit			Guid	lelines	Remarks
			Result	Average	Guideline	Average	
			Value	Period	Value	Period	
1.	Nitrogen	μg/m <sup>3</sup>	31.15	24 hours	200	1 hour	14/2/2020
	Dioxide						18:31-19:30
							(Peak Hour)
2.	Sulfur	$\mu g/m^3$	0	24 hours	20	24 hours	-
	Dioxide						
3.	Particulate	μg/m <sup>3</sup>	102.07	24 hours	50	24 hours	-
	Matter PM <sub>10</sub>						
4.	Particulate	μg/m <sup>3</sup>	69.27	24 hours	25	24 hours	-
	Matter PM <sub>2.5</sub>						
5.	Ammonia	ppm	0.22	24 hours	NG	-	-
6.	Carbon	ppm	267.92	24 hours	NG	-	-
	Dioxide						
7.	Carbon	ppm	0.39	24 hours	NG	-	-
	Monoxide						
8.	Hydrogen	ppb	1.13	24 hours	NG	-	-
	Sulfide						
9.	Methane	ppm	0	24 hours	NG	-	-
10.	Relative	%	55.87	24 hours	NG	-	-
	Humidity						
11.	Temperature	°C	29.20	24 hours	NG	-	-

According to the above table, the particulate matters (PM10 and PM2.5) were much higher than the guideline values because vehicles and humans are moving around the air measuring station. The other parameters of the ambient air quality are within the National Environmental Quality (Emission) Guidelines.

#### 2) Workplace Air Quality

There are two descriptions about the workplace air quality as follows.

# **\$** Locations of Workplace (Indoor) Air Quality Measuring Points

Sr. No.	Measuring Points	Description
1.	ID-1	Chemical Storeroom
2.	ID-2	Plastic Pallet Store
3.	ID-3	Plastic Pallet Manufacturing
4.	ID-4	Installation Department
5.	ID-5	Injection Check
6.	ID-6	Paper Box Store
7.	ID-7	Warehouse
8.	ID-8	Plastic Cleaning
9.	ID-9	Plastic Making

Sr. No.	Measuring Points	Description
10.	ID-10	Generator Room Point-1
11.	ID-11	Generator Room Point-2

#### **\*** Workplace Air Quality Measurement Results

Sr.	Magguring	Parameter		
No.	Measuring Points	VOC (ppm)	$\frac{PM_{10}}{(\mu g/m^3)}$	PM <sub>2.5</sub> (μg/m <sup>3</sup> )
1.	ID-1	0.3	72	69
2.	ID-2	1.2	74	72
3.	ID-3	1.2	97	91
4.	ID-4	0.2	86	83
5.	ID-5	0.2	22	15
6.	ID-6	0	67	60
7.	ID-7	0	71	61
8.	ID-8	2.1	24	21
9.	ID-9	1.2	17	15
10.	ID-10	2	70	56
11.	ID-11	2.4	73	53

The workplace (indoor) air quality does not have the specific guidelines.

#### 3) Stack Emission Measurement

There are three descriptions about the stack emission measurement.

#### **!** Information of Generator

Type: Diesel Generator

Capacity: One unit of 1,000 kVA and two units of 1,500 kVA.

Fuel Type: Diesel

# **Status of Stack Emission Measuring Point**



Figure 1-6 Status of Generator Stack Emission Measurement

			Measu	rement F	Results	
Sr. No.	Parameter	Unit	Generator-1	Generator-2	Generator-3	Small Combustion Facilities Emission Guidelines
1.	$O_2$	%	18.4	17.9	17.8	-
2.	CO	mg/Nm <sup>3</sup>	423	416	420	-
3.	$CO_2$	%	2.25	2.31	2.12	-

# **❖** Generator Stack Emission Measuring Result

mg/Nm<sup>3</sup>

mg/Nm<sup>3</sup>

According to the measuring results, stack emission gases from generators are within the desirable limits.

91

2.6

92

2.1

90

1.9

460

2000

#### (b) Noise Levels

 $NO_2$ 

 $SO_2$ 

5.

#### 1) Ambient Noise Levels

There are two descriptions about the noise as follows.

# **❖** Location of Ambient Noise Levels Measuring Point

Sr. No.	Measuring Points	Geographic Information	Description
1.	NMP	16° 56' 29.09" N	Near the entrance of
		96° 09' 23.85" E	the office at MAOI-2



Figure 1-7 Locations of Ambient Noise Level Measuring Points

#### **\*** Ambient Noise Level Measuring Results

Sr. No.	Measuring Points	Measuring Results (dBA)	NEQG (dBA)	Remarks
1.	NMP	58.42	70	Day time (7:00 a.m. ~ 10:00 p.m.)
		58.47	70	Night time (10:00 p.m. ~ 7:00 a.m.)

As the project is located in industrial park, the observed values are compared with the guidelines for industrial area. The observed values of the ambient noise levels for daytime and nighttime are within the limit of Guidelines. Therefore, the human and the environment cannot be affected by the noise.

# 2) Workplace (Indoor) Noise Levels

There are two descriptions about the workplace (indoor) noise levels as follows.

# **❖** Locations of Workplace (Indoor) Noise Level Measuring Points

Sr. No.	Measuring Points	Description
1.	ID-1	Chemical Storeroom
2.	ID-2	Plastic Pallet Store
3.	ID-3	Plastic Pallet Manufacturing
4.	ID-4	Installation Department
5.	ID-5	Injection Check
6.	ID-6	Paper Box Store
7.	ID-7	Warehouse
8.	ID-8	Plastic Cleaning
9.	ID-9	Plastic Making
10.	ID-10	Generator Room Point-1
11.	ID-11	Generator Room Point-2

# **❖** Measuring Results of Indoor (Workplace) Noise Levels

Sr. No.	Measuring Points	Noise Measuring Results (Duration = 1hr) (dB[A])	OHS Guidelines (8 hr) (dB[A])
1.	ID-1	60.6	90
2.	ID-2	69.8	90
3.	ID-3	87.5	90
4.	ID-4	73.5	90
5.	ID-5	76.5	90
6.	ID-6	53.6	90
7.	ID-7	47.3	90
8.	ID-8	87.2	90
9.	ID-9	89.2	90
10.	ID-10	94.8	90
11.	ID-11	100.1	90

According to the measuring results of average noise levels at workplace, the noise levels except generator rooms were within the acceptable conditions. The major noise pollution source inside the factory may be happened due to operation of generators and they are used in case of emergency only when the electricity goes out.

# (c) Light Intensity

There are two descriptions about the light intensity measurement as follows.

# **\*** Locations of Light Intensity Measuring Points

Sr. No.	<b>Measuring Points</b>	Location
1.	ID	Plastic Making

#### **\$** Light Measurement Results

Sr No		Measure Values (Lux)	Guideline Values (Lux)
1.	ID	215	150-300

According to the above table, all the light levels were within the limits.

#### (d) Water and Wastewater Quality

There are two descriptions about the water and wastewater quality measurement as follows.

# **\$** Locations of Water and Wastewater Sampling Points

Sr. No.	Sampling Points	Description	Geographic Information	Remarks
1.	WSP-1	Tube Well Water	16° 56' 23.5" N	Water
			96° 09' 25.2" E	
2.	WSP-2	Inside Drain	16° 56' 25.26" N	Wastewater
			96° 09' 24.07" E	
3.	WSP-3	Treated Water	16° 56' 25.45" N	Water
			96° 09' 24.32" E	
4.	WSP-4	Wastewater	16° 56' 25.08" N	Wastewater
		Treatment Outlet	96° 09' 25.33" E	
5.	WSP-5	Wastewater	16° 56' 25.19" N	Wastewater
		Treatment Inlet	96° 09' 25.6" E	

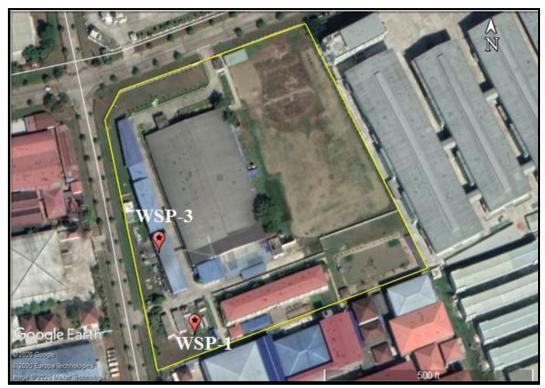


Figure 1-8 Location of Water Sampling Points



Figure 1-9 Location of Wastewater Sampling Points





Figure 1-10 Status of Wastewater Sampling

# \* Result of Water Quality

Table 1-2 Result of Water Quality (GMES Laboratory)

Sr. No.	Parameter	Unit	Analysi	Analysis Value	
140.			WSP-1	WSP-3	WHO (2011)
1.	Aluminum	mg/l	0.01	0.02	0.2
2.	Arsenic	μg/l	0.01	0	10
3.	Chloride	mg/l	160	8	250
4.	Copper	mg/l	ND	ND	2
5.	Cyanide	mg/l	ND	ND	0.07
6.	Manganese	mg/l	0.8	ND	0.4
7.	pН	-	6.01	5.72	6.5~8.5
8.	Sulfate	mg/l	ND	ND	250
9.	Total Alkalinity	mg/l	78	15	-
10.	Total Dissolved Solids	mg/l	590	10	600
11.	Total Hardness	mg/l	197	12	500
12.	Total Iron	mg/l	3	< 0.1	0.3
13.	Turbidity	NTU	10.7	8.86	5

ND - Not Detected

According to the lab result, even though the turbidity values decrease from 10.7 NTU to 8.86 NTU after treatment, turbidity from WSP-1 (Tube well water) and WSP-3 (Treated water) are still higher than the guidelines. Manganese and total iron from WSP-1 are higher

than the guidelines but after treating they are within the guideline values. pH value from WSP-2 is a little lower than the guidelines and the other parameters are within the limits.

Table 1-3 Result of Wastewater Quality (GMES Laboratory)

Sr.	Parameter	Unit	Analysis Value			National Environmental Quality (Emission)
No.	Tarameter	Cint	WSP-2	WSP-4	WSP-5	Guidelines (2015) General Application
1.	Arsenic	mg/l	0	0	0	0.1
2.	Chemical Oxygen Demand (COD)	mg/l	62	20	120	250
3.	Oil and Grease	mg/l	ND	ND	2	10
4.	рН	-	6.44	6.01	6.42	6~9
5.	Total Suspended Solids (TSS)	mg/l	2	20	1510	50

ND - Not Detected

According to the lab result, most of the parameter measured from wastewater samplings are within the guideline values except the value of TSS from WSP-5 (Wastewater Treatment Plant-Inlet). After this is treated in wastewater treatment plant, it can be seen that the TSS value decreases from 1510 mg/l to 20 mg/l. Therefore, the wastewater treatment system is effective.

#### (e) Soil Quality

There are two descriptions about the soil quality measurement as follows.

#### Location of Soil Sampling

Sr. No.	Sampling Points	Geographic Information	Description
1.	SSP	16° 56' 23.3" N	Inside the factory-2
		96° 09' 25.1" E	

SSP = Soil Sampling Point



Figure 1-11 Location of Soil Sampling Point



Figure 1-12 Status of Soil Sampling

# **\*** Results of Soil Quality

Sr.	Parameter	Unit	Analysis Value
No.	rarameter	Cilit	Construction Site Soil
1.	Aluminum	mg/kg soil	0.15
2.	Arsenic	mg/kg soil	0.025
3.	Chloride	g/kg soil	0.32
4.	Copper	mg/kg soil	ND
5.	Cyanide	mg/kg soil	ND
6.	Extractable Acidity	cmol/kg soil	7.8
7.	Manganese	mg/kg soil	0.026
8.	P-Alkalinity	mmol/l extract	0
9.	pН	-	5.27
10.	Total Alkalinity	mmol/l extract	0.57

Sr.	Parameter	Unit	Analysis Value	
No.	1 ar ameter	Omt	Construction Site Soil	
11.	Total Iron	g/kg soil	0.015	

The above results are noted as baseline data, and it will compare with the future results. Comparison will show better or worse.

# 1.5.2 Natural Environment/ Physical Component (Secondary Data)

#### (a) Natural Environment/ Physical Component

Physical environment essentially illustrates baseline conditions of climate, topography, geology, soils and hydrology of the project area, where necessary, of proposed project regardless of an assessment study. These data are extracted from the regional facts about Yangon Region, Mingaladon Township prepared by the Administrative Department of Township (2020) and study area is an area of that township.

There are 5 categories as follows.

- Climate
- Topography
- Geology
- **❖** Soil
- Hydrology

#### (b) Biological Component

At this heading, the natural vegetation and animals are shown, extracted from secondary data.

#### (c) Socio-economic Status

Socio-economic status of Mingaladon Township is summarized as

- Population and communities
- Religion
- Education Attainment
- Connectivity
- Health Facility
- Economy
- Land Use
- Workforce

#### 1.6 Summary of Impacts and Mitigation Measures

The MAOI Factory-2 has been already constructed factory buildings so that there is no need to consider the construction phase impacts.

The MAOI products are produced from recyclable materials (such as glass and plastics). However, as other products, these products may create various kinds of environmental impacts at different stages of the manufacturing processes. There may be some

positive and negative impacts in the surrounding environment of the project site due to the implementation of the project. A major source of the environmental impacts is the consumption of energy required to produce these products and water during the manufacturing process from raw materials to the final products.

Mitigation describes the measure proposed in order to avoid, reduce and where practicable remedy significant adverse effects. The summary of mitigation measures for the identified effects for the various disciplines of the physical, biological and human environment during the operation phase and decommissioning phase are described in Chapter-6 and Chapter-7.

# 1.7 Monitoring Program

#### **Environmental Monitoring**

Monitoring is an essential and an integral part of the implementation of the proposed environmental mitigation measures. Environmental monitoring generates useful information and improves the quality of implementation of mitigation measures.

Monitoring involves the observation, review and assessment of onsite activities to ensure adherence to regulatory standards and the recommendations made to reduce negative impacts. The plan must be comprehensive and address relevant issues, with a reporting component that will be made available to the regulatory agencies based on a mutually agreed frequency.

According to the section 108 of EIA Procedure, the project proponent will submit the Monitoring Report prescribed in the schedule of the Environmental Management Plan to the Ministry every (6) month or as may be prescribed by the Ministry.

Table 1-4 Environmental Monitoring Plan for the Operation and Decommissioning Phases

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
			1 0	ation Phase		
1.	Air Quality	Ambient air quality	Once a Year	Measurement by equipment	Within the factory premise	EMT
		Indoor air quality	Twice a Year	Measurement by equipment	Workplace (Chemical storeroom, plastics pallet store, plastics pallet manufacturing, installation dept., injection check, paper box store, warehouse, plastics cleaning and plastics making)	EMT
		Generators' stack emission	Twice a Year	Measurement by equipment	All of the generators' stack	EMT
		<ul> <li>Inspection of the machinery, equipment, and vehicles</li> <li>Inspection of the ventilation system</li> <li>Inspection of the toilets and sewage system</li> <li>Inspection of the waste disposal yards and waste bin</li> <li>Preparation of inspection record /</li> </ul>	Monthly	Inspection and checking	Workplace	EMT and Supervisors

Sr. No.	Category	Monitoring Items	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		report				
2.	Noise Levels	Ambient noise level	Once a Year	Measurement of noise levels by equipment	Within the factory premise	EMT
		Indoor noise level	Twice a Year	Measurement of noise levels by equipment	Workplace (Chemical storeroom, plastics pallet store, plastics pallet manufacturing, installation dept., injection check, paper box store, warehouse, plastics cleaning and plastics making)	EMT
		<ul> <li>Record the noise and vibration activities</li> <li>Inspection of the installation of sound barriers</li> <li>Regular supply of sufficient quantity of PPE</li> </ul>	Twice a year or according to instruction and compliance	Inspection and checking	Workplace	EMT and Supervisors
3.	Light Intensity	Light intensity	Twice a Year	Measurement by equipment	Workplace	EMT
4.	Water and Wastewater	Tube well water quality	Once a Year	Laboratory Analysis	Tube well water and treated water	EMT
	Quality	Effluent water quality	Once a Year	Laboratory Analysis	Inside drain, wastewater treatment outlet and wastewater	EMT

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
					treatment inlet	
		■ Inspection of the	Monthly	Inspection and	Workplace and factory premises	EMT and
		stormwater flowing		checking		Supervisors
		<ul><li>Inspection and</li></ul>				
		maintenance of the				
		screen to collect the				
		solid waste				
		<ul><li>Inspection of the</li></ul>				
		condition of concrete				
		floor				
		<ul><li>Inspection of the</li></ul>				
		leakage and spillage of				
		oil, lubricant and fuel				
		<ul><li>Preparation of</li></ul>				
		inspection record /				
		report				
5.	Soil Quality	Soil	Once a Year	Laboratory	Within the factory premise	EMT
				Analysis		
6.	Waste Disposal	<ul><li>Separate bins for</li></ul>	Monthly	Inspection and	Factory compounds and	EMT
		different kinds of		checking	surrounding environment	
		wastes				
		<ul><li>Record the solid waste</li></ul>				
		amount				
		Inspect the waste				
		disposal system				

Sr. No.	Category	Monitoring Items	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		<ul> <li>Inspect storage system</li> </ul>				
		of waste				
7.	Hazardous	<ul><li>Record the storage</li></ul>	Monthly	Inspection and	Hazardous waste storage area	EMT
	Chemical and	amount of hazardous		checking		
	Materials	waste				
		<ul><li>Inspect the disposal</li></ul>				
		system				
		<ul><li>Inspect the hazardous</li></ul>				
		wastes storage area				
8.	Water	<ul><li>Record the amount of</li></ul>	Daily/	Records by water	Drinking water, process water	EMT
	Consumption	water usage	Monthly	meter	and domestic water use	
9.	Electricity	<ul> <li>Record electricity</li> </ul>	Daily/	Recording	electric meter	EMT
	Consumption	usage	Monthly			
10.	Fuel	<ul><li>Record diesel</li></ul>	Daily/	Recording	Generator	EMT
	Consumption	consumption	Monthly			
11.	Occupational	■ Record the OHS	Monthly	Inspection and	Factory compounds	HSE Officer
	Health and	Record the worker		checking		and EMT
	Safety	complains and conflict				
		Inspect the PPE and				
		record the details of				
		PPE delivery				
		<ul><li>Supply the first aid kits</li></ul>				
		<ul><li>Inspect the worker rest</li></ul>				
		camps and drinking				
		water supplying				

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		situation Inspect the toilets and sewage system				
		<ul> <li>Regular medical checkup for employee at sensitive area</li> <li>Medical check-up record of each employee</li> <li>Give training for OHS and first aid</li> </ul>	Once a year	Inspection and checking	Factory compounds	HSE Officer and EMT
12.	Social Consideration	<ul><li>CSR activities</li><li>Worker ware-fare activities</li></ul>	Yearly	Records	Nearest local area and factory area	HR Manager and EMT
13.	Emergency Risks	<ul> <li>Inspect the firefighting equipment</li> <li>Record the training situation and trained person</li> <li>Record the hazardous materials handling and management</li> <li>Inspect and record the emergency response activities</li> </ul>	Twice a year or if necessary	Inspection and checking	Factory compounds	Emergency Response Team and EMT

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		<ul><li>Inspect and record the</li></ul>				
		situation of drain				
		inside the project area				
		<ul><li>Record the emergency</li></ul>				
		response plan				
		<ul><li>Record the inspection</li></ul>				
		information				
			Decommi	ssioning Phase		
1.	Air Quality	Ambient air quality	Once	Measurement by	A suitable point on demolition	Demolition
				equipment	site	Contractor
		Dust emission	Daily	Visual inspection	Demolition site	Demolition
						Contractor
		Exhaust gases	Weekly	Visual inspection	Demolition site	Demolition
						Contractor
		Repair and maintenance	As necessary	Record of repair	Demolition site	Demolition
		of vehicles, machineries		and maintenance		Contractor
		and equipment				
2.	Noise Levels	Ambient noise level	Once	Measurement of	Demolition site	Demolition
				noise levels by		Contractor
				equipment		
		Repair and maintenance	As necessary	Record of repair	Demolition site	Demolition
		of vehicles, machineries		and maintenance		Contractor
		and equipment				
3.	Water and	Water quality for drinking	Once	Laboratory	Demolition site	Demolition
	Wastewater	and domestic use		Analysis		Contractor

Sr. No.	Category	Monitoring Items	Monitoring Frequency	Monitoring Method	Location	Responsibilities
	Quality					
		Effluent water quality	Once	Laboratory	Effluent pit before discharge	Demolition
				Analysis		Contractor
		Operation of temporary	Weekly	Visual inspection	Demolition site	Demolition
		water ponds				Contractor
		Domestic wastewater	Monthly	Record of	Installation areas of temporary	Demolition
		collection		wastewater	septic tank	Contractor
				collection receipts		
4.	Soil Quality	Soil	Once	Laboratory	Demolition site	Demolition
				Analysis		Contractor

Estimated Cost for Environmental Monitoring for operation phase and decommissioning phase are 16,250,000 MMK and 3,450,000 MMK respectively and information are shown at section 8.2.

#### 1.8 Public Consultation and Information Disclosure

There are two group discussions: one for meeting with employees of the factory and another for consultation meeting with the relevant government organizations and local community in the vicinity of project.

# 1.8.1 Meeting with Factory Employees

On 12<sup>th</sup> March 2021, the consultation meeting for factory employees was held in factory's canteen of Myanmar Asia Optical International (MAOI) Company Limited. There are 242 employees attended and their suggested letters were collected.





Figure 1-13 Employees Discussion Program

The details of the discussion meeting with the employees are as follows.

Table 1-5 Excerpts from Suggestion of the Factory Employees

Sr. No.	Issues	Suggestions/ Comments	Responses of Factory In-charge		
1. Su	1. Suggestion on Occupational Health and Safety				
1.1	Personal Protective	■ All persons mentioned that ▼	✓ PPE is provided to all employees		
	Equipment	they were provided	in the factory.		

Sr. No.	Issues	Suggestions/ Comments	Responses of Factory In-charge
		adequately.	
1.2	Drinking Water	<ul> <li>All persons mentioned that they were provided with good drinking water.</li> </ul>	✓ The company provides healthy drinking water. In addition, the water quality is monitored annually.
1.3	Sanitation System	<ul> <li>All persons recommended it is good and enough.</li> </ul>	✓ There are hand basins, soaps and hand sanitizer in toilets, public
1.4	Cleaning System	All staff members who attended the meeting stated those soap / hand sanitizers are provided for washing.	areas and canteen entrances of the factory.
2. Su	00 0	Conditions in the Workplace	
2.1	Noise in Workplace	The 40 persons mentioned there is no noise, but 7 persons mentioned there was a little noise.	<ul> <li>✓ Noise is monitored monthly.</li> <li>✓ Earplugs and ear masks are provided for employees who exceed the limit in the workplace.</li> </ul>
2.2	Bad Odor	• The 45 persons mentioned there is no odor, but 2 persons mentioned there was a little odor.	✓ Ventilation system will be cleaned regularly every month.
2.3	Workplace Light Intensity	<ul> <li>All persons recommend.</li> </ul>	✓ There are enough standard lamps in every workplace of the company.
2.4	Particles/dust in Workplace	■ The 9 persons mentioned it was no particles, but 8 persons mentioned there was a little.	✓ Workers at the site will be fitted with a mask and regularly cleaned to remove particles.
2.5	Ventilation System in Workplace	<ul> <li>All persons recommend.</li> </ul>	✓ There is adequate ventilation in the workplace. There are exhaust system and air conditioning system.
3. Su		Relation in Workplace	
3.1	Social Relation between Employees	• All persons mentioned it was convenient with upper level.	✓ Employees from different level work or act together with good collaboration

# 1.8.2 Consultation Meeting with the Relevant Government Organization and Neighbors of the Factory

On 16<sup>th</sup> October 2021, the public consultation meeting was held in Industrial Zone Management Committee Office of Mingaladon Industrial Park (MIP). That meeting was attended by the responsible person of Industrial Zone Management Committee, relevant to the government organization, responsible person from the vicinity of the factory, responsible persons from both factories and third-party organization and their suggestion letters are collected.









Figure 1-14 Consultation Meeting with the Relevant Government Organization and the Neighbors of the Factory

Table 1-6 Summary of Discussion in the Meeting

Sr.	Participants	Explanations/ Responses of Factory	
Sr. No.	<ul> <li>Daw Nyo Lin Htet (Deputy Officer)         Yangon Region (North district),         Environmental Conservation Department         <ul> <li>An environmental team must be formed at the factory.</li> <li>Trainings and the environmental awareness program should be provided to the workers by the team.</li> <li>For more information on environmental conservation, please visit the Department of Environmental Conservation's website and social media pages.</li> <li>The guidelines set by the Department of Environmental Conservation should be followed.</li> <li>Emphasis should be placed on health care for employees working in the factory.</li> <li>It is recommended that the required</li> </ul> </li> </ul>	Explanations/ Responses of Factory  U Kyaw Soe Win- Managing Director (Green Myanmar Environmental Services Co., Ltd)  The skilled staff such as Pollution Control Manager or Safety Officer will be appointed in their factories.  The proponent to take care of the occupational safety and environmental protection of the employees in the relevant factories.  Participants were also encouraged to submit comments on the suggestion letter if they did not wish to do so in person.	
	• It is recommended that the required business licenses for the factory business be submitted to the relevant department for approval.		

Table 1-7 Description of Suggestion Letter from the Meeting

Sr. No.	Name	Comments	
1	U Aung Thu	➤ Good environmental management arrangements	
2	Daw May Myo Shwe	➤ Convenient to prevent environmental damage	
		➤ Complete in all respects	
3	U Tun Lin Kyaw	➤ Social welfare of employees	
		➤ Health and employment	
		➤ Please try to get a regular salary	
4	U Thet Myo Htike	➤ Wastewater treatment system is found at the factory	
		➤ Water pH is 6.35 according to Green Myanmar Analysis	
		➤ Wastewater treatment should be maintained regularly due to the	
		use of chemicals	
		Plastic Injection machines are running. Ventilation system	
		should be provided for odors and should be maintained	
		Chemical management plans should be developed and	
		implemented to protect the workplace and the environment	
5	Daw Zin Mar Hlaing	➤ No comments	
6	Ma May Chan Khaing	➤ No comments	
7	Daw May Aye	Follow to the laws and regulations issued by the government	

Sr. No.	Name	Comments		
8	Daw Nyo Lin Htet	<ul> <li>Apply for a license from the relevant department for handling and handling chemicals</li> <li>Describe daily/monthly energy consumption in a report</li> <li>There is follow to the national environmental quality (emission) guidelines for discharging of wastewater, emission of Exhaust fumes, Noise in workplace</li> <li>It is suggested that staff be educated on environmental awareness dissemination and environmental awareness on the Environmental Conservation Department Yangon Region Facebook Page</li> </ul>		

#### 1.9 Conclusions and Recommendations

During the preparation of EMP report, it was observed that most of the negative impacts on the environment are largely localized. The negative environment impacts that will result from the project include waste generation, emissions and fire hazards during operation which, however, can be mitigated if adequate control measures are taken into account. Based on this environmental study, environmental management and mitigation measures are proposed to ensure that there are no environmental impacts that exceed acceptable levels.

In conclusion, the project will have overall beneficial impacts in reducing air pollution, dust, and improving socioeconomic conditions along the project corridor, and will have insignificant negative impacts, which will be carefully monitored and adequately mitigated.

# 2.0 INTRODUCTION

# 2.1 Background

Myanmar Asia Optical International Company Limited (MAOI) is a wholly foreign owned investment by Asia Optical International Limited (99%) from British Virgin Island and Mr. Yuzo Asano (1%) from Japan. It is incorporated and registered in Myanmar having registration number of 147842228 (26.3.2003).

There are two factories:

- Factory-1 operates for manufacturing of all kinds of lens and
- ➤ Factory-2 operates for manufacturing of plastic parts for camera and Selffocus Lens Array (SLA).

This report is prepared for factory-2 and it is located at Plot No. (C1, C2), Mingaladon Industrial Park, Mingaladon Township, Yangon Region, Myanmar.

In February 2020, Green Myanmar Environmental Services Company Limited (GMES) was requested by Myanmar Asia Optical International Company Limited (MAOI) to provide professional consultation service to "Manufacturing of all kinds of Lens, Lens Units, Optical Apparatuses, Electronic Apparatuses, Self-focus Lens Array (SLA), Plastic Parts for Electronic Apparatuses and other Apparatuses on CMP Basis" Project and assist the submission of the Environmental Management Plan (EMP) Report to the Environmental Conservation Department (ECD), Ministry of Natural Resources and Environmental Conservation (MONREC).

This report is prepared for assessing the environmental impact due to factory operation. Thus, it is prepared in accordance with the existing policy, laws, rules and instructions and submitted as a requirement to receive the Environmental Compliance Certificate (ECC) from the Ministry of Natural Resources and Environmental Conservation (MONREC).

# 2.2 Type of EMP/IEE and EIA Requirement

**Type of Project:** Manufacturing of all kinds of Lens, Lens Units, Optical

Apparatuses, Electronic Apparatuses, Self-focus Lens Array (SLA), Plastic Parts for Electronic Apparatuses

and other Apparatuses on CMP Basis

**Total Production Capacity:** Plastic Parts for Camera - 1,251,800 Pcs per month

Self-focus Lens Array (SLA) - 25,600,000 Pcs per year

**Total Project Area:** 36,622.88 m<sup>2</sup>

Myanmar Asia Optical International Company Limited (MAOI) had already implemented prior to the issuance of Environmental Conservation Law (2012), Environmental Conservation Rules (ECR), and EIA Procedures (2015) and had been conducting factory operation since 2003.

However, in session (9) of EIA Procedures (2015) by MONREC, it is stated that "Any project/ business already in existence prior to the issuance of the Rules, or the

construction of which has already commenced prior to the issuance of the Rules, and which, in either case, shall be required to undertake within the timeframe prescribed by the Department, an environmental compliance audit, including on-site assessment, to identify past and/or present concerns related to that project 's environmental impacts, and to:

- develop an EIA or IEE or EMP;
- obtain an ECC; and
- take appropriate actions to mitigate adverse impacts in accordance with the law, rules and other applicable laws.

On July 24, Regional Deputy Office of Environmental Conservation Department (ECD) at Yangon Region issued the Letter No. YaKa- 1/3/4(EIA) (1332/2019) to undertake Environmental Management Plan (EMP) and submit this EMP to ECD, MONREC. (See in **Appendix 1**)

# 2.3 Objectives of the EMP

The main objective of the EMP is to identify impacts from the project implementation on physical, biological, socio-economic, and cultural environment of the project area, and to propose measures to avoid, minimize, mitigate, and compensate such impacts. The specific objectives of the proposed EMP are to:

- Establish baseline data of the proposed work area,
- Identify major issues that may arise as a result of the proposed works on biophysical, socio-economic and cultural environment of the project area,
- Recommend practical and site-specific environmental mitigation and enhancement measures, and prepare and implement environmental management and monitoring plan, and
- Confirm that EMP is sufficient for the proposed work.

# 2.4 Methodology Adopted

The methodology used in the preparation of the EMP report is

- (1) Desk review of information such as maps, reports, research data and related ministries' webpage, etc. for the project;
- (2) Preparation for collecting project related information;
- (3) Review of international and local laws, regulations and procedures relating to environment, health and safety, etc.;
- (4) Field visit and survey to collect data related to baseline conditions of the study area; and
- (5) Public meetings with the representatives of the project and local community.

# 2.5 Identification of the Project Proponent

#### 2.5.1 Proponent Information

The proposed project is developed by Myanmar Asia Optical International Company Limited (MAOI) in 2003 with 100% of foreign investment. The objective

of this company is to manufacture various kinds of plastic parts and self-focus lens array (SLA) on CMP Basis at factory-2 as per MIC Permit.

**Table 2-1 Proponent Information** 

<u> </u>			
Company Registration Number	147842228		
Established Time	26.3.2003		
Date of Test Run	March 2004		
Date of Commercial Run	1.7.2004		
Proposed Duration of Investment	45 years		
Contact Person			
Name	Daw May Chan Khine		
Designation	Line Leader		
	(Admin Department, Import/Export Section)		
Telephone	09420092281		
Email	maoiimexp4@gmail.com		
Contact Detail			
Factory Address	Plot No. (C1, C2), Mingaladon Industrial Park,		
Mingaladon Township, Yangon Region, Myanma			
Telephone	095173541		
Email	mao80@asiaoptical.com.mm,		
	maoiimexp2@gmail.com		

#### 2.5.2 List of Stakeholders

The stakeholders of MAOI are listed in **Table 2-2**.

Table 2-2 List of Stakeholders

Sr. No.	Name	Place of Incorporation & Registration Number / Citizenship & Passport	Address	Shares Holding Ratio
1.	Asia Optical	England	Palm Grove House,	99%
	International	155129	PAO Box 438, Road	
	Limited		Town, Tortola, British	
			Virgin Islands.	
2.	Mr. Yuzo	Japanese	1-17-1-516, Hisamoto	1%
	Asano	TZ 1187753	Takatsuku, Kawasaki	
			City, Kanagawa, Japan.	

#### 2.5.3 List of Directors and Executives

The directors and executives of MAOI are listed in **Table 2-3**.

Table 2-3 List of Directors and Executives

Sr. No.	Name	Citizenship & Passport	Date of Birth	Designation
1.	Mr. Yuzo Asano	Japanese	01.03.1948	Managing
		TZ 1187753		Director
2.	Mr. Chen, Han-	Chinese	20.03.1967	Director
	Jung	314993106		

# 2.5.4 Organization of Management

The organization is structured to provide flexibility, a high level of personal accountability and responsibility while also motivating cross training and sharing of responsibilities, the need arises and circumstances permit. The following figure describes the organization chart of the project proponent. The following figure shows the organization chart of MAOI.

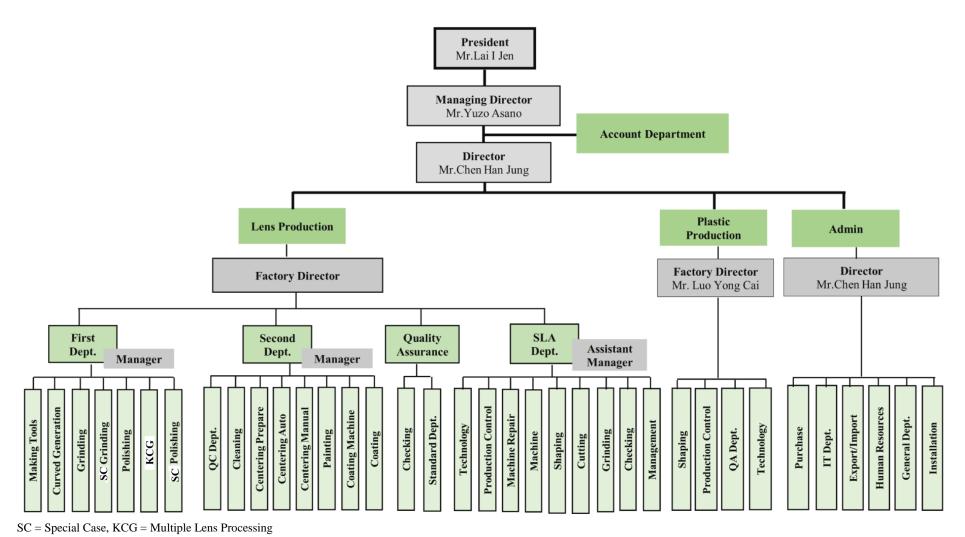


Figure 2-1 Organization Chart of the Project Proponent

# 2.6 Environmental Management Plan (EMP) Study Team

The planning and conduct of the EMP report of the Proposed Project was carried out by a team of Green Myanmar Environmental Services Company Limited (GMES) which is registered in ECD having with Transitional Consultant Registration Number of Organization No.0006, together with the support of Daw May Chan Khine, Line Leader (Admin Department, Import/ Export Section) from Myanmar Asia Optical International Company Limed (MAOI).

The details of Information of the study team are described in **Table 2-4** and **Table 2-5**. The transitional consultant registration certificates for organization and personal are attached in **Appendix 2** and **Appendix 3**.

Table 2-4 Organization in charge of EMP Implementation

Organization Name	Green Myanmar Environmental Services Co., Ltd. (GMES)
Transitional Consultant	0006
Registration Number	
Company Registration	110299931
Number	
Office Address	No. 115, Kanaung Min Thar Gyi Road, Hlaing Thar Yar
	Industrial City, Industrial Zone (1), Hlaing Thar Yar Township,
	Yangon Region, Myanmar.
Telephone	+95-9-897 978 296
Email	info@gmes-mm.com, gmescompany@gmail.com

Table 2-5 Organization of the GMES's EMP Study Team

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
1.	Team Leader	<ul><li>Overall management of EMP</li></ul>	Engr. U Kyaw Soe Win
		operation	Managing Director
		<ul><li>Work plan</li></ul>	Green Myanmar Environmental
		<ul><li>Technical meeting &amp; workshop</li></ul>	Services Co., Ltd.
		<ul><li>Document reviewing and process</li></ul>	
		flow studying	Experience in EMP processing
		<ul><li>Lead and facilitation of public</li></ul>	
		consultation	No.0019
		<ul><li>Data compilation and analysis</li></ul>	
		<ul><li>Coordination with stakeholders</li></ul>	
2.	Technical	■ Design of EMP	Daw Kyaw Kyaw Win
	Advisor	<ul><li>Technical meeting and workshop</li></ul>	Retired Director
		<ul><li>Monitoring of EMP process</li></ul>	Myanmar Petrochemical
		<ul><li>Public consultation meeting</li></ul>	Enterprise, Ministry of
		<ul><li>Quality control and check</li></ul>	Electricity and Energy
		<ul><li>Data compilation and analysis</li></ul>	
3.	Environmental	■ Advise on the design of EMP	Engr. Daw Khin Swe Aye
	Consultant	<ul> <li>Develop term of reference for duty</li> </ul>	Former Lecturer,

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
		and responsibility among EMP team	Chemical Engineering Dept., Yangon Technological
		<ul> <li>Advise on the environmental baseline</li> </ul>	University
		<ul><li>Advise on the field survey</li><li>Facilitate technical analysis</li></ul>	No.0021
		Streamline the Environmental     Management Plan (EMP)	
4.	Consultant (Air Quality	<ul> <li>Give advice on collecting field data for air quality</li> </ul>	Engr. U Sein Thaung Oo Chairman
	Management)	<ul> <li>Assist on air quality control system</li> <li>Give advice on air pollution</li> </ul>	Green Myanmar Environmental Services Co., Ltd.
		<ul> <li>evaluate and mitigation</li> <li>Give advice for data processing, computing, projection, modeling and analysis</li> </ul>	No.0023
		• Give advice in report preparation	
5.	Consultant	<ul> <li>Collecting field data for project</li> </ul>	Engr. Daw Tin May Soe
	(Wastewater	activities and municipal waste	Retired Professor & Head,
	Management)	• Assist in laboratory testing	Chemical Engineering Dept.,
		• Data processing, computing,	Mandalay Technological
		projection, modeling and analysis <ul><li>Assist in report preparation</li></ul>	University
			Experience in environmental
			toxicology and pollution control
			No.0028
6.	Consultant	<ul> <li>Advise on data processing and</li> </ul>	U Myo Myint
	(Laboratory	laboratory testing	Retired Factory Manager
	Analysis)	<ul> <li>Prepare instruction for laboratory testing</li> </ul>	Ministry of Industry (1)
		• Check the result of environmental laboratory testing	No.0026
		<ul> <li>Compare the laboratory result and verification</li> </ul>	
7.	Consultant	<ul> <li>Assist in preparation of guideline</li> </ul>	Daw Khin Shwe Htay
	(Environmental	for environmental sampling of air	Former Lecturer,
	Quality	and water quality	Chemical Engineering Dept.,
	Management)	<ul> <li>Monitor the sample collection</li> </ul>	Yangon Technological
		<ul> <li>Register and inspect the sample collected</li> </ul>	University
		<ul> <li>Assist in report preparation for environmental baseline</li> </ul>	Environmental Engineer
			No.0022

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
8.	Social Operation and Field Coordinator	<ul> <li>Facilitate the technical meeting and record keeping</li> <li>Assist in data mining and secondary data collection</li> <li>Coordinate with local authority and communities</li> </ul>	U Khin Aung Social Specialist Green Myanmar Environmental Services Co., Ltd. No.0025
9.	Field Supervisor	<ul> <li>Develop operational checklist for environmental study</li> <li>In charge for preliminary field visit</li> <li>Supervise field survey</li> <li>Finalize checking for report and report formatting</li> </ul>	U Kyi Han Bo B.E (Aerospace Fuel and Propellant Engineer)
10.	Environmental Experts	<ul> <li>Data collection</li> <li>Document reviewing</li> <li>Process studying</li> <li>Preparation of impact evaluation and assessment, and management plan</li> <li>Report preparing and formatting</li> </ul>	Daw Aye Thuzar Hein B.E (Chemical)  Daw Hnin Htet Htet Hlaing B.E (Port and Harbor)  Daw Wai Wai Mon B.E (Port and Harbor)  Daw No No Hnin Nu Nway B.E (Port and Harbor)
11.	Environmental Monitoring Team	<ul> <li>Environmental baseline measuring</li> <li>Data analysis</li> <li>Environmental baseline mapping</li> <li>Environmental baseline report preparing and formatting</li> </ul>	U Pyae Phyo Kyaw B.Sc (Forestry) (Monitoring Team Leader)  U Myo Thet Naung B.E (Aerospace Fuel and Propellant Engineer) (Assistant Team Leader)  U Aung Ko Min B.E (Chemical) (Monitoring Technician)  U Thiha Zaw (Assistant Monitoring Technician)
12.	Public Coordinator	<ul> <li>Assist in stakeholder meeting</li> <li>Document preparation and invitation</li> <li>Preparation of document for public consultation meeting</li> </ul>	U Aung Kyaw Than B.E (Chemical)

Sr. No.	Title of Post	Terms of Reference	Nominee, Organization & Transitional Consultant Registration Number
		<ul> <li>Taking suggestion from public</li> </ul>	
		consultation meeting	
13.	Laboratory	<ul><li>Preparation for water and</li></ul>	Daw Cherry Thwin
	Experts	wastewater sampling	B.E (Chemical)
		<ul> <li>Preparation for laboratory testing</li> </ul>	Laboratory Manager
		<ul><li>Laboratory testing</li></ul>	
		<ul> <li>Reporting for laboratory results</li> </ul>	U Thet Min Paing
			B.E (Chemical)
			Laboratory Technician

# 2.7 Structure of the Report

This report was compiled and presented in (13) chapters including executive summary as shown below. An Executive Summary is also prepared and presented in both Myanmar and English Languages.

Table 2-6 Structure of the Report

Sr. No.	Chapter	Content	
1.	Chapter 1	Executive Summary	
	_	Provides an overview of the main findings of the study. (Both in	
		Myanmar and English Languages)	
2.	Chapter 2	Introduction	
		Provides the details of the project proponent and the study team,	
		the methodology and scope of work.	
3.	Chapter 3	Policy, Legal and Institutional Framework	
		In accordance with the EMP Regulations, all legislation and	
		guidelines that have been considered in this Chapter.	
4.	Chapter 4	Description of the Project	
		Provides an overview of the proposed project, project location,	
		project activities (technical design specifications), and the details	
		of the project, waste management and so on.	
5.	Chapter 5	Description of the Surrounding Environment	
		This Chapter provides a description of the environment to be	
		affected by project.	
6.	Chapter 6	Summary of Impact	
		The Chapter describes key Environmental issues associated with	
		the proposed project and summarized the impacts.	
7.	Chapter 7	Description of the Proposed Mitigation Measures	
		The Chapter describes the mitigation measures relevant to the	
		operation and were subjected to the impact assessment.	
8.	Chapter 8	Monitoring Program	
		This chapter describes the roles and responsibilities of stakeholders	
		involved in the implementation of the environmental management	

Sr. No.	Chapter	Content	
110.		plan and monitoring plans during operation and decommissioning	
		phases are described.	
9.	Chapter 9	Emergency Plan	
		The emergency plan implemented in the factory is described in this	
		chapter.	
10.	Chapter 10	Capacity Development and Training	
		Capacity development and training have been a critical and central	
		component of the work. Thus these are described in this chapter.	
11.	Chapter 11	Public Consultation and Disclosure	
		This chapter describes the employee discussion program with	
		workers/employees and public consultation meeting with local	
		residents.	
12.	Chapter 12	Workplan and Implementation Schedule	
		This chapter describes workplan and implementation schedule.	
13.	Chapter 13	Conclusions and Recommendations	
		This chapter presents the main conclusions of the report and	
		recommendations of future action to be taken.	

A number of appendices contain additional information and details referred to in the main text.

# 3.0 POLICY, LEGAL AND INSTITUTIONAL FRAMEWORK

# 3.1 Background

The emerging environmental scenario calls for attention on conservation and judicious use of natural resources. There is a need to integrate the environmental consequences of the development activities and for planning suitable measures in order to ensure sustainable development. The environmental considerations in any developmental process have become necessary for achieving sustainable development. To achieve such goals, the basic principles to be adopted are:

- ➤ To enhance the quality of environment in and around the project area by adopting proper measures for conservation of natural resources,
- ➤ To prevent adverse environmental and social impact to the maximum possible extent,
- > To mitigate the possible adverse environmental and socio-economic impact on the project-affected areas.

Policy, legal and institutional framework of the proposed project relating to the environmental, social, health and economic conditions are discussed in this section.

# 3.2 Policy Framework

This section highlights the relevant environmental policies established by the Government of Myanmar for purposes of environmental protection towards the process of sustainable development. The Government, through the Ministry of Natural Resources and Environmental Conservation (MONREC), has established environmental policies which broadly aim at:

- ➤ Encouraging respect for the environment by all and being mindful and taking care of the environment,
- ➤ Ensuring environmental issues are integrated with economic matters to attain sustainable development,
- > Reviewing and evaluating development plans to ensure they follow the set environmental guidelines/policies,
- ➤ Encouraging the public to take part in environmental matters so as to enlighten them on the same hence improve on environmental performance.

# 3.3 Myanmar Regulatory Framework for Environmental Assessment

Myanmar Government issued:

- National Environmental Policy in 2019,
- Myanmar Agenda 21 in 1997,
- National Sustainable Development Strategy in 2009,
- The Environmental Conservation Law in 2012,
- The Environmental Conservation Rules in 2014,

• Environmental Impact Assessment Procedure and National Environmental Quality (Emission) Guidelines in 2015.

#### 3.3.1 National Environmental Policy of Myanmar (2019)

Myanmar National Environmental Policy, which already included for social policy, subsequently gazette on 10th June 2019 is as follows:

To establish sound environment policies in the utilization of water, land, forests, marine resources and other natural resources in order to conserve the environment and prevent its degradation, the Government of the Union of Myanmar hereby adopts the following policy:

"The wealth of a nation is its people, its cultural heritage, its environment and its natural resources."

The objective of Myanmar's environment policy is aimed at achieving harmony and balance between these through the integration of environmental considerations into the development process to enhance the quality of the life of all citizens.

Every nation has the sovereign right to utilize its natural resources in accordance with its environmental policies, but great care must be taken not to exceed its jurisdiction or infringe upon the interests of other nations. It is the responsibility of the state and citizen to preserve its natural resources in the interest of present and future generations. Environmental protection should always be the primary objective in seeking development."

#### 3.3.2 Myanmar Agenda 21 (1997)

The commission also formulated a blueprint, the Myanmar Agenda 21, in 1997 as a follow up of national environmental policy in response to the call of the Earth Summit to develop national strategies to implement the Global Agenda 21. Myanmar Agenda 21 serves as a framework for integrating environmental considerations in future national development plans as well as sectorial and regional development plans in Myanmar and recognizes the need of environmental impact assessment, integrated economic development and sustainable social development respectively.

# 3.3.3 National Sustainable Development Strategy (2009)

National Sustainable Development Strategy was formulated to implement the National Environmental Policy in 2009 by Ministry of Forestry with the vision of wellbeing and happiness of Myanmar people. Three overarching goals identified are sustainable management of natural resources; integrated economic development and sustainable social development. In order to achieve these goals, a series of objectives are set along with activities. In addition, leading institution and collaboration institutions are identified to perform the activities.

#### 3.3.4 The Environmental Conservation Law (2012)

The principle law governing environmental management in Myanmar is the Environmental Conservation Law, which was issued in March, 2012 (The Pyidaungsu Hluttaw Law No.9/2012). The law stipulates that government bodies are in charge of environmental conservational as well as their relevant roles and responsibilities. It touches on water, noise, vibration and solid waste qualities but does not provide specific standards to be met.

It also mentions that any new development project must perform a system of Environmental Impact Assessment (EIA) and Social Impact Assessment (SIA) in order to find out whether or not a project or activity to be undertaken by any government department, organization or person may cause a significant impact on the environment or not. In the context of project development, it is important to note that the law adopts the notion of 'Polluter Pays Principle' as it implies that the project proponents are responsible for covering all environmental and social costs generated by the project.

The law serves as the basic for founding of Environmental Conservation Department (ECD) under the Ministry of Natural Resources and Environmental Conservation (MONREC), both of which will be explained later. Following the Environmental Conservation Law are two legal instruments: Environmental Conservation Rules (2014) and EIA Procedures (2015).

The main objectives of Environmental Conservation Law related to this Project are abstracted from *Section 3* as follows.

- (a) To enable to emerge a healthy and clean environment and to enable to conserve natural and cultural heritage for the benefit of present and future generations;
- (b) To reclaim ecosystems as may be possible which are starting to generate and disappear;
- (c) To enable to manage and implement for decrease and loss of natural resources and for enabling the sustainable use beneficially;

As the important reference, the following sections are excerpted: Section 7 for provisions of duties and powers of MONREC, Section 10 for Environmental Quality Standards, Section 13 for monitoring as well as Section 14 and Section for polluter's responsible.

## Section 7: Duties and Powers relating to the Environmental Conservation of the Ministry

- (g) To specify categories and classes of hazardous wastes generated from the production and use of chemicals or other hazardous substances in carrying out industry, agriculture, mineral production, sanitation and other activities;
- (h) To prescribe categories of hazardous substances that may affect significantly at present or in the long run on the environment;

- (i) To promote and carry out the establishment of necessary factories and stations for the treatment of solid wastes, effluents and emissions which contain toxic and hazardous substances:
- (j) To prescribe the terms and conditions relating to effluent treatment in industrial estates and other necessary places and buildings and emissions of machines, vehicles and mechanisms;
- (m)To lay down and carry out a system of EIA and SIA as to whether or not a project or activity to be undertaken by any Government department, organization or person may cause a significant impact on the environment;
- (o) To manage to cause the polluter to compensate for environmental impact, cause to contribute fund by the organizations which obtain benefit from the natural environmental service system, cause to contribute a part of the benefit from the businesses which explore, trade and use the natural resources in environmental conservation works.

### Section 10: Environmental Quality Standards

The Ministry may, with the approval of the Union Government and the Committee, stipulate the following environmental quality standards:

- (a) Suitable surface water quality standards in the usage in rivers, streams, canals, springs, marshes, swamps, lakes, reservoirs and other inland water sources of the public;
- (b) Water quality standards for coastal and estuarine areas;
- (c) Underground water quality standards;
- (d) Atmospheric quality standards;
- (e) Noise and vibration standards;
- (f) Emissions standards;
- (g) Effluent standards;
- (h) Solid wastes standards;
- (i) Other environmental quality standards stipulated by the Union Government.

#### Section 13: Monitoring

The Ministry shall, under the guidance of the Committee, maintain a comprehensive monitoring system and implement by itself or in co- ordination with relevant Government departments and organizations in the following matters:

- (a) The use of agro- chemicals which cause to impact on the environment significantly;
- (b) Transport, storage, use, treatment and disposal of pollutants and hazardous substances in industries;
- (c) Disposal of wastes come out from exploration, production and treatment of minerals, industrial mineral raw materials and gems;
- (d) Carrying out waste disposal and sanitation works;
- (e) Carrying out development and constructions;

(f) Carrying out other necessary matters relating to environmental pollution.

**Section 14:** A person causing a point source of pollution shall treat, emit, discharge and deposit the substances which cause pollution in the environment in accord with stipulated environmental quality standards.

**Section 15:** The owner or occupier of any business, material or place which causes a point source of pollution shall install or use an on-site facility or controlling equipment in order to monitor, control, manage, reduce or eliminate environmental pollution. If it is impracticable, it shall be arranged to dispose the wastes in accord with environmentally sound methods.

#### 3.3.5 The Environmental Conservation Rules (2014)

Environmental Conservation Rules provide a platform to bridge the Environmental Conservation Law with more specific and practical rules and guidelines including EIA Procedures and environmental quality standards, the rules stipulate that the Ministry of Environmental Conservation and Forestry will adopt and carry out the environmental impact assessment system which includes determination of categories of plans, business or activity that requires Environmental Impact Assessment (EIA).

**Rule 61:** The Ministry may approve and reply on the EIA report or IEE or EMP with the guidance of the Committee.

#### 3.3.6 Environmental Impact Assessment Procedure (2015)

The objectives of the EIA procedures are to provide a common framework for EIA reporting and to ensure that EIA reporting is in line with legal requirements, good practices and professional standards.

**Section 76:** For Project types, which require EMP according to the Article 55 (a) of the Rules or Article 24 of the Procedure, the Project Proponent may prepare an EMP by itself or may appoint a person or organization who/which is registered according to the Article 18.

Section 77: The Project Proponent shall issue a letter of endorsement in a format prescribed by the Ministry according to the Article 63. Such letter shall be submitted to the Department prepared either in the Myanmar language, or in the English language or both. The Project Proponent shall submit the EMP to the Department in both digital form and complete paper copies, together with the required service fee as prescribed by the Department, and confirming that:

- (d) the accuracy and completeness of the EMP;
- (e) the EMP has been prepared in strict compliance with applicable laws including this Procedure; and
- (f) the Project will at all times comply fully with the commitments, mitigation measures, and plans in the EMP.

**Section 78:** Upon Receipt of the EMP from the Project Proponent, the Department shall review and submit to the Ministry to enable it to make a final decision on approval of the EMP.

**Section 79:** If it is determined by the Ministry that the EMP does not satisfy requirements, then the Project Proponent shall be called upon by the Department to undertake necessary amendments and/or to provide supplementary information as directed by the Ministry.

Section 80: Upon completion of its review of the EMP, the Ministry shall;

- (a) approve the EMP, subject to any conditions it may prescribe, and issue an ECC; or
- (b) require that the Project carry out an IEE or EIA, citing the reasons for this decision and informing the Project Proponent of its decision; and, in either case
- (c) publicly disclose its decision.

Section 81: The Department shall deliver the final decision of the Ministry within thirty (30) working days of receipt of an EMP. If the Ministry requires an EMP to be amended, then the due date for delivery of the Ministry's decision shall be extended accordingly

## 3.3.7 National Environmental Quality (Emission) Guidelines (2015)

The objective of these national guidelines is to provide the basis for regulation and control of noise and vibration, air emissions, liquid discharges from various sources. According to these guidelines, all projects subject to EIA procedure have to comply with and refer to applicable national guidelines standards or international standards adopted by the Ministry. In addition, a project proponent shall be responsible for the monitoring of their compliance with general and applicable industry- specific guidelines as specified in the EMP and ECC (Environmental Compliance Certificate). In addition, the Project Proponent is responsible to monitor the environmental quality based on the developed EMP as specified in the following sections.

**Section 12:** As specified in the EIA Procedure, projects shall engage in continuous, proactive and comprehensive self- monitoring of the project and comply with applicable guidelines and standards. For purposes of these Guidelines, projects shall be responsible for the monitoring of their compliance with general and applicable industry- specific Guidelines as specified in the EMP and ECC.

**Section 13:** Air emissions, noise, odor, and liquid/ effluent discharges will be sampled and measured at points of compliance as specified in the project EMP and ECC.

## 3.4 Environmental-related Laws and Regulations in Myanmar

There are several laws and regulations relating to the environmental matters administered by various relevant ministries in Myanmar. The environmental-related laws and regulations are tabulated with their main purposes/description in following table.

Table 3-1 Environment-Related Laws and Rules

Sr. No.	Laws and Regulation	Year	Description/Purpose	
I.	Administrative Sector			
1.1	The Towns Act	1907	Provisions on offences which affect the human environment.	
1.2	The Police Act	1945	Provisions on offences which affect the human environment.	
1.3	The Ward or Village Tracts Administration Law	2012	Provisions on offences which affect the human environment.	
II.	<b>City Development Secto</b>	r		
2.1	The Water Power Act	1927	Prohibitions on the pollution of public water.	
2.2	The Underground	1930	This Act provides the requirement for systematic	
	Water Act		use of ground water toward sustainable purpose.	
2.3	The Yangon City	2018	Provisions relating to environmental sanitation,	
	Development Law		pollution of air and water, and public health.	
III.	<b>Environmental Conserv</b>			
3.1	Constitution	2008	The Union shall protect and conserve natural environment.  Every citizen has the duty to assist the Union carrying out the environmental conservation	
3.2	Environmental Conservation Law	2012	To implement National Environmental Policy; to set up basic principles and guidelines for sustainable development and systematic integration of environmental conservation; to conserve the clean environment, natural and cultural heritage for present and future generation, to prevent degradation of natural resources and for sustainable use, to build up public understanding on environmental awareness.	
3.3	Environmental Conservation Rules	2014	The Rules reinforce the obligation for project developers to submit an EIA or an IEE. It aims to establish and adopt the necessary programs for the conservation and enhancement of environment, protection, control and reduction of pollution in environment, and conservation.	
3.4	Environmental Impact Assessment Procedures	2015	To establish types of project that needed to submit an EIA or an IEE or an EMP. Also, to establish the environmental assessment process and to issue the environmental compliance certificate.	
3.5	National Environmental Quality (Emission) Guidelines	2015	To provide the basis for regulation and control of noise and vibration, air emissions, and liquid discharges from various sources in order to	

Sr. No.	Laws and Regulation	Year	Description/Purpose
			prevent pollution for purposes of protection of
			human and ecosystem health.
IV.	Culture and Heritage Se		
4.1	The Protection and	2019	To implement the protection and preservation
	Preservation of Cultural		policy with respect to perpetuation of cultural
	Heritage Regions Law		heritage that has existed for many years.
			Provisions to protect ancient sites and regions and cultural heritage areas from any adverse impacts
			due to industrialization, tourism and urbanization.
			To protect and preserve the cultural heritage and
			new project in such sensitive areas is required to
			get prior approval from the Culture.
V.	Biodiversity and Ecosys	tem Sector	get prior approvar from the culture.
5.1	The Forest Law	2018	Provisions to conserve water, soil, biological
	The Foldst Law	2010	diversity and the environment; sustain forest
			produce yields; protect forest cover; establish
			forest and village firewood plantations;
			sustainably extract and transport forest products.
5.2	The Protection of	1994	To protect wildlife, wild plants and conserve
	Wildlife and Wild		natural areas, to contribute towards works of
	Plants and		natural scientific research, and to establish
	Conservation of		zoological gardens and botanical gardens. The
	Natural Areas Rules		Law highlights habits maintenance and
			restoration, protection of endangered and rare
			species of both fauna and flora, establishment of
			new parks and protected areas, and buffer zone
			management.
5.3	Protection of	2018	To provide opportunities for more effective
	Biodiversity and		conservation
	Protected Areas Law		of forests while recognizing the rights and the
5 1	The Consequentian of	2006	potential roles of local communities.  Protection and maintenance of river bank and
5.4	The Conservation of	2006	
	Water Resources and Rivers Law		river water quality by defining area of river bank and forbidding substance which are harmful.
VI.	Land Management		and foroidding substance which are narmin.
6.1	Constitution	2008	The Union is the ultimate owner of all lands and
0.1	Constitution	2000	all natural resources above and below the ground,
			above and beneath the water and in the
			atmosphere in the Union.
6.2	Land Acquisition Act	1984	This is basic legal framework for land acquisition
0.2		1701	providing government to acquire the land from
			landowner. Major elements include demarcation
			of boundary, declaration of action and role and
			responsibility of collectors.
L	I		<u> </u>

Sr. No.	Laws and Regulation	Year	Description/Purpose
6.3	Farmland Law	2012	This law focuses on land use right of farmers and details the process of permission to potential farmers who are eligible. Under this law. Land can be sold, leased and transferred freely by legitimate land owner. Role and responsibility of farmland administrative bodies of various levels are defined in detail.
6.4	Vacant, Fallow and Virgin Land Law	2012	This law aims at providing framework for effective use of land. Investor can apply land right to the government for basic structure or other investment which would benefit for the sake of state.
6.5	National Land Use Policy	2016	This policy was released recently to ensure the systematic land use management and administration of present and future so as to improve food security, water resource development, transportation, business development and to protect environment and cultural heritage.
VII.	Emergency/ Disaster Se	ctor	
7.1	Natural Disaster Management Law	2013	To implement natural disaster management programs systematically and expeditiously in order to reduce disaster risks, to conserve and restore the environmental affected by natural disasters and to provide health, education, social and livelihood programs in order to bring about living conditions for victims.
7.2	The Myanmar Fire Brigade Law	2015	Provisions to protect and to prevent from fire disaster and natural disaster, which insures losses, and endanger.
VIII.	Finance and Revenue Se	ector	
8.1	The Myanmar Insurance Law	1993	Requires any business which may pollute the environment to effect compulsory general liability insurance.
8.2	The Income Tax Law	1974 (Amendment in 2011)	Income gained from the economic business shall be levied under the heading of economic business. [section 11 (a)]  An entrepreneur shall send income annual list annually within three months after the end of the income year. [section 18]
8.3	The Commercial Tax Law	1990 (Amendment in 2014)	Whoever carries out the production in the country commercial business shall be levied tax stated in the schedule of this law. [section 4] Whoever carries out the production business or

Sr. No.	Laws and Regulation	Year	Description/Purpose
			service business shall register to the township
			income tax officer as prescribed in the
			regulations. [section 11]
IX.	National Planning and 1		
9.1	Myanmar Investment	2016	To protect the invertors and their businesses in
	Law	2015	accordance with law, to create job opportunities
	Myanmar Investment	2017	for the people, to develop high functioning
<b>T</b> 7	Rules		production, service, and trading sectors.
X.	Industrial Sector	2012	No and the H. Samuel and amount the most thing
10.1	The Export and Import Law	2012	No one shall import or export the prohibited
	Law		goods. [section 5]  No one shall import or export the goods without
			permit which are prescribed to obtain permit.
			[section 6]
10.2	The Electricity Law	2014	The law elaborates the responsibilities of the
			Inspectorate under the Ministry of Industry for
			ensuring safety in electricity in generation,
			transmission and distribution. It includes the
			testing of all electrical goods produced
			domestically or imported. If safety is at risk the
			Inspector has the authority to disconnect supply
			to any customer. The Inspector also is
			responsible for determining cause of any injury or
			death caused by electricity, issuing electrician
			registration certificates, and establishing
10.3	The Petroleum Act	1934	standards.  Provisions to regulate production, storage, and
10.5	The Petroleum Rules	1934	transport of oil so as not to cause pollution or the
	The Tenoreum Rules	1737	outbreak of fires
10.4	The Factories Act	1951	Provisions for the proper disposal of waste and
		(Amendment	effluents in factories; treatment of wastewater;
		in 2016)	regulations for health and cleanliness in factories,
			and the prevention of hazards
10.5	The Private Industrial	1990	Provision to avoid environmental pollution
	Enterprise Law		
10.6	The Prevention of	2013	To protect from being damaged the natural
	Hazard from Chemical		environment resources and being hazardous any
	and Related Substances		living beings by chemical and related substances
	Law		To perform the sustainable development for the
			occupational safety, health and environmental
XI.	Health Sector		conservation
11.1	The Penal Code of	1961	Provisions related to prohibitions against
11.1	Offences Affecting the	1 701	contaminating public springs or reservoirs and
	Officiaces Affecting the		containinating public springs of reservoirs and

Sr. No.	Laws and Regulation	Year	Description/Purpose
	Public Health, Safety Convenience, Decency and Morals		"making atmosphere noxious to health".
11.2	Public Health Law	1972	To promote and safeguard public health and to take necessary measures in respect of environmental health
11.3	Prevention and Control of Communicable Diseases Law	1995 (Amendment in 2011)	The Law highlights the functions and responsibilities of health personnel and citizens in relation to prevention and control of communicable diseases. It also describes measures to be taken in relation to environmental sanitation, reporting and control of outbreaks of epidemics and penalties for those failing to comply. The law also authorizes the Ministry of Health to issue rules and procedures when necessary with approval of the government.
11.4	The Control of Smoking and Consumption of Tobacco Product Law	2006	To protect from the danger which affects public health adversely by creating tobacco smoke-free environment; To uplift the health, economy and social standard of the public through control of smoking and consumption of tobacco product
XII.	Transportation Sector		
12.1	The Motor Vehicles	2015	Provisions to control vehicle engine emissions
	Law		and the leakage of fuel or oil.
XIII.	Workforce Sector	1022	
13.1	The Workmen's Compensation Act	1923 (Amendment in 2011)	To make payments out-of-pocket to employees who become injured or who die in any accidents arising during and in consequence of their employment. Such compensation also must be made for diseases, which arise as a direct consequence of employment, such as carpal tunnel syndrome.
13.2	The Leave and Public Holidays Act	1951	To allow worker for leave and holiday allowances, religious or social activities with earn allowance, and benefits for Health allowances.  Concerned workers: Daily wage workers/temporary workers/permanent workers.
13.3	The Labor Organization Law	2011	<ul> <li>The objectives of this law are:</li> <li>To protect the rights of the workers in accordance with section 24 of the Constitution</li> <li>To promote good relations between the employer and the worker</li> <li>To enable to workers to form and carry out</li> </ul>

Sr. No.	Laws and Regulation	Year	Description/Purpose
			the labor organizations systematically and independently.
13.4	The Settlement of	2012	The objectives of this law are:
	Labor Dispute Law		<ul><li>For safeguarding the rights of workers,</li></ul>
			■ Promoting a good relationship between
			employer and workers and creating a peaceful
			workplace,
			Obtaining the rights fairly, rightfully and
			quickly by settling disputes between
10.5	TEL G 11G 1	2012	employer and worker justly.
13.5	The Social Security	2012	The objective of this law is to get benefit for
	Law		sickness, maternity, death, employment injury, invalidity benefit, superannuation benefit by:
			giving medical treatment, providing cash benefit
			or granting a right to residency.
13.6	The Development of	2013	To fulfill the basic needs of the workers and their
13.0	Employment and Skill	2013	families who are working in commercial
	Law		establishments, production and servicing
			establishments, agriculture and livestock and to
			develop the work performance and
			competitiveness of workers.
13.7	The Minimum Wage	2013	To fulfill the basic needs of the workers and their
	Law		families who are working in commercial
			establishments, production and servicing
			establishments, agriculture
			and livestock.
			To develop the work performance and competitiveness of workers.
13.8	The Payment of Wage	2016	Receipt of wages is made regularly. Unlawful
13.0	Law	2010	deductions are not to be made.
13.9	Occupational Health	2019	The objectives of this law are:
	and Safety Law		■ To effectively implement measures related to
	,		safety and health in every industry;
			■ To establish the duties and responsibilities of
			those who are responsible under this law,
			including workers and employers, so as to
			reduce workplace accidents and occupational
			diseases;
			■ To work with employees, workers and others
			who are responsible under this law to prevent
			accidents and occupational diseases in the
			increasing number of workplaces as a result of economic growth;
			■ To set occupational safety and health
			10 set occupational safety and hearth

Sr. No.	Laws and Regulation	Year	Description/Purpose
			standards which reflect the context of
			Myanmar while conforming with the regional
			and internal ones so as to create safe and
			health workplaces.

## 3.5 International Conventions, Treaties and Agreements

Myanmar has signed several international treaties related to the environment. **Table 3-2** presents a list of the conventions signed by Myanmar to date that are potentially relevant to the Project.

Table 3-2 International Treaties and Conventions

1	Convention Concerning the Protection of the World Cultural and Natural Heritage
2	Montreal Protocol on Substances that Deplete the Ozone Layer & all amendments
3	Stockholm Convention on Persistent Organic Pollutants
4	Convention on Biological Diversity
5	Cartagena Protocol on Biosafety
6	International Tropical Timber Agreement
7	Ramsar Convention on Wetlands
8	Convention on International Trade in Endangered Species of Wild Fauna and Flora
	(CITES)
9	ASEAN Agreement on the Conservation of Nature and Natural Resources
10	United Nations Convention to Combat Desertification
11	United Nations Framework Convention on Climate Change (UNFCCC) and Kyoto
	Protocol
12	Global Tiger Forum, India in August 1994

# 3.6 Standards and Guidelines for Surrounding Environment of the Project

According to Article 10 of the Environmental Conservation Law (2012), (now MONREC set up some environmental quality standards, with the approval of the Union Government and the Committee. (See in section 3.3.4)

As of 29 December 2015, emission guideline and target values of ambient air quality, air emission, wastewater, and noise levels were set in NEQG, while other standards have not been set yet by MONREC.

In this Project, the Project Proponent, MAOI basically apply the NEQG and in case of no quantitative target values in NEQG, the quantitative target values of other country and international organizations will be referred. Each quantitative target value to be applied is described below sections.

## 3.6.1 Air Quality

Since there is no ambient air quality standard in Myanmar and only air emission guideline values in National Environmental Quality Emission Guidelines (NEQG) (2015) referred from WHO's air quality guidelines, these guideline values

shown in below table will be set as target values for both ambient and emission air quality for operation and closing phases.

Table 3-3 Ambient Air Quality Guidelines for Operation and Closing Phases

Sr. No.	Parameter	Averaging Period	Guideline Value (µg/m³)
1.	Nitrogen dioxide	1-year	40
		1-hour	200
2.	Ozone	8-hour daily	100
		maximum	
3.	$PM_{10}$	1-year	20
		24-hour	50
4.	PM <sub>2.5</sub>	1-year	10
		24-hour	25
5.	Sulfur dioxide	24-hour	20
		10-minutes	500

Source: National Environmental Quality (Emission) Guidelines (NEQG) (29 Dec 2015)

Since there is any combustion facilities designed to deliver electrical or mechanical power, steam, heat or any combination of these, it is necessary to set the target value for air emission level from combustion facilities in this project.

Table 3-4 Small Combustion Facilities Emission Guidelines

Sr. No.	Combustion Technology /Fuel	Particulate Matter PM <sub>10</sub> <sup>a</sup>	Sulfur Dioxide	Nitrogen Oxides
1.	Gas	-	-	$200^{\rm b}{\rm mg/Nm^{3c}}$
				$400^{\rm d}~{\rm mg/Nm}^3$
				$1,600^{\rm e}$ mg/Nm <sup>3</sup>
2.	Liquid	100	3	$1,600-1,850^{\rm f}{\rm mg/Nm}^3$
3.	Natural gas (3-<15 MW <sup>g</sup> )	-	-	90 <sup>h</sup> mg/Nm <sup>3</sup>
				$210^{i} \text{ mg/Nm}^{3}$
4.	Natural gas (15-<50 MW)	-	-	$50 \text{ mg/Nm}^3$
5.	Fuels other than natural	-	0.5 % sulfur	200 <sup>h</sup> mg/Nm <sup>3</sup>
	gas (3-<15 MW)			$310^{\rm j}~{\rm mg/Nm}^3$
6.	Fuels other than natural	-	0.5 % sulfur	$150 \text{ mg/Nm}^3$
	gas (15-<50 MW)			
7.	Gas	-	-	$320 \text{ mg/Nm}^3$
8.	Liquid	150 mg/Nm <sup>3</sup>	2,000 mg/Nm <sup>3</sup>	460 mg/Nm <sup>3</sup>
9.	Solid <sup>j</sup>	150 mg/Nm <sup>3</sup>	2,000 mg/Nm <sup>3</sup>	650 mg/Nm <sup>3</sup>

<sup>&</sup>lt;sup>a</sup> Particulate matter 10 micrometers or less in diameter, <sup>b</sup> Spark ignition, <sup>c</sup> Milligrams per normal cubic meter at specified temperature and pressure, <sup>d</sup> dual fuel, <sup>e</sup> compression ignition, <sup>f</sup> higher value applies if bore size > 400 m,

Source: National Environmental Quality (Emission) Guidelines (NEQG) (29 Dec 2015)

<sup>&</sup>lt;sup>g</sup> Megawatt, <sup>h</sup> Electric generation, <sup>i</sup> mechanical drive, <sup>j</sup> Includes biomass

## 3.6.2 Water Quality

According to International Water Quality Guidelines Study report published by United Nation Environment Program, there are various water quality standards and they are:

- a) Water Quality Standards
  - ❖ Water Quality Standards for Conservation of the living Environment (Rivers)
  - ❖ Water Quality Standards for Conservation of the living Environment (Lakes)
  - ❖ Water Quality Standards for Protecting Human Health (Rivers and Lakes)
- b) Ground Water Quality Standards
- c) Coastal Water Quality Standards
  - ❖ Coastal Water Quality Standards for Conservation of the Living Environment
  - ❖ Coastal Water Quality Standards for the Protection of Human Health
- d) Drinking Water Quality Standards

Although the water quality standards are widespread, for this EMP, Study GMES EMP Team selected WHO Drinking Water Standards - 2011 and also selected National Environmental Quality (Emission) Guidelines (2015) as effluent water standards for general effluent runoff.

Table 3-5 WHO Drinking Water Standards (2011)

Sr. No.	Parameter	Guideline Values	Unit
1.	Aluminum	0.2	mg/l
2.	Arsenic	10	μg/l
3.	Chloride	250	mg/l
4.	Copper	2	mg/l
5.	Cyanide	0.07	mg/l
6.	Manganese	0.4	mg/l
7.	рН	6.5~8.5	-
8.	Sulfate	250	mg/l
9.	Total Alkalinity	-	mg/l
10.	Total Dissolved Solids	600	mg/l
11.	Total Hardness	500	mg/l
12.	Total Iron	0.3	mg/l
13.	Turbidity	5	NTU

The following NEQG general guideline values will be applied for general effluent runoff emitted from utility operations, sewage treatment plant, wastewater treatment plant, and storm water runoff during the operation stage of the project.

Table 3-6 Standards for Wastewater, Stormwater Runoff, Effluent and Sanitary Discharges (General Application)

Sr. No.	Parameter	Guideline Values	Unit
1.	5-day Biochemical oxygen demand	50	mg/l
2.	Ammonia	10	mg/l

Sr.	Parameter	Guideline	Unit
No.	1 ar ameter	Values	Cint
3.	Arsenic	0.1	mg/l
4.	Cadmium	0.1	mg/l
5.	Chemical oxygen demand	250	mg/l
6.	Chlorine (total residual)	0.2	mg/l
7.	Chromium (hexavalent)	0.1	mg/l
8.	Chromium (total)	0.5	mg/l
9.	Copper	0.5	mg/l
10.	Cyanide (free)	0.1	mg/l
11.	Cyanide (total)	1	mg/l
12.	Fluoride	20	mg/l
13.	Heavy metals (total)	10	mg/l
14.	Iron	3.5	mg/l
15.	Lead	0.1	mg/l
16.	Mercury	0.01	mg/l
17.	Nickel	0.5	mg/l
18.	Oil and grease	10	mg/l
19.	рН	6-9	S.U. <sup>a</sup>
20.	Phenols	0.5	mg/l
21.	Selenium	0.1	mg/l
22.	Silver	0.5	mg/l
23.	Sulfide	1	mg/l
24.	Temperature increases	<3 <sup>b</sup>	°C
25.	Total coliform bacteria	400	100 ml
26.	Total phosphorus	2	mg/l
27.	Total suspended solids	50	mg/l
28.	Zinc	2	mg/l

<sup>&</sup>lt;sup>a</sup> Standard unit

Source: National Environmental Quality (Emission) Guidelines (NEQG) (29 Dec 2015)

#### 3.6.3 Noise Levels

According to the NEQG, the noise levels are set as shown in the following table and noise prevention and mitigation measures should be taken by all projects where predicted or measured noise impacts from a project facility or operation exceed the applicable noise level guideline at the most sensitive point of reception. Noise impacts should not exceed the levels shown below, or result in a maximum increase in background levels of three decibels at the nearest receptor location off-site.

Since the project is located in Mingaladon Industrial Park and surrounding receptors are industrial and commercial areas, the target noise level targeted to industrial and commercial receptors will be applied during operation phase of the project.

<sup>&</sup>lt;sup>b</sup> At the edge of a scientifically established mixing zone which takes into account ambient water quality, receiving water use, potential receptors and assimilative capacity; when the zone is not defined, use 100 meters from the point of discharge

Table 3-7 Ambient Noise Level Standards for Operation Phase

	One Hour L <sub>Aeq</sub> , dB (A)			
Receptor	Day time 07:00-22:00 (10:00-22:00 for Public holidays)	Night time 22:00-07:00 (22:00-10:00 for Public holidays)		
Resident, Institutional, Educational	55	45		
Industrial Commercial	70	70		

Source: National Environmental Quality (Emission) Guidelines (NEQG) (29 Dec 2015)

Table 3-8 OHS Noise Exposure Limits for the Work Environment (Noise Exposures in dBA)

Sr. No.	Noise (dBA)	Permissible exposure Noise (hours and minutes)
1	85	16 hrs
2	87	12 hrs 6 min
3	90	8 hrs
4	93	5 hrs 18 min
5	96	3 hrs 30 min
6	99	2 hrs 18 min
7	102	1 hrs 30 min
8	105	1 hr
9	108	40 min
10	111	26 min
11	114	17 min
12	115	15 min
13	118	10 min
14	121	6.6 min
15	124	4 min
16	127	3 min
17	130	1 min

Note: Exposures above or below the 90 dB limit have been "time weighted" to give what OHSA believes are equivalent risks to a 90 dB eight-hour exposure. [Source: Marsh (9)]

## 3.6.4 Light Intensity

Work area light intensity should be adequate for the general purpose of the location and type of activity, and should be supplemented with dedicated work station illumination, as needed.

The typical light levels are described in **Table 3-9**.

Table 3-9 Typical Light Levels

Lux Level	Factories
20-75	Emergency Stairs, Warehouse
75-150	Exit/Entrance Passages
150-300	Packing Work
300-750	Visual Work: Production Line
750-1,500	Typesetting: Inspection Work

Lux Level	Factories
1,500-3,000	Electronic Assembly, Drafting

## 3.7 Institutional Arrangement for Environmental Management

#### 3.7.1 Institutional Arrangement during Operation Phase

During the operation phase, the project proponent, Myanmar Asia Optical International Co., Ltd. is fully responsible for implementation of environmental management, mitigation and monitoring activities and submission of environmental monitoring report to Environmental Conservation Department (ECD), Yangon Region under MONREC. Operations Department under MAOI is in-charged department for environment, security and safety concerned issues throughout the operation stage. The proposed institutional arrangement to implement EMP during the operation phase is shown in **Figure 3-1**.

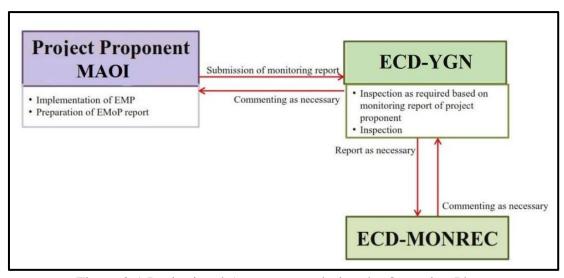


Figure 3-1 Institutional Arrangement during the Operation Phase

#### 3.7.2 Institutional Arrangement during Decommissioning Phase

During the decommissioning phase, the demolition contractor will establish temporary project office to implement demolition works. The contractor is responsible to implement environmental management, mitigation and monitoring activities and submission of environmental monitoring report to the project proponent, MAOI. The project proponent is responsible for the supervision of overall environmental management activities done by construction contractor, and for the submission of environmental monitoring report to Environmental Conservation Department (ECD), Yangon Region under MONREC. The proposed institutional arrangement to implement EMP during the decommissioning phase is shown in **Figure 3-2**.

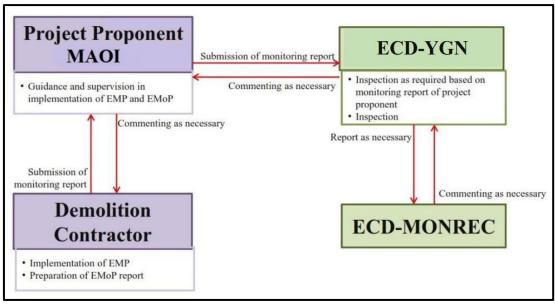


Figure 3-2 Institutional Arrangement during the Decommissioning Phase

## 3.8 Key Commitment of Proponent for Environmental Management

The general commitments by Myanmar Asia Optical International Company Limited are as follows:

- ❖ To comply with all Myanmar laws, rules and regulations and Environmental Conservation Law (2012)
- ❖ To ensure that legal requirements are incorporated in designs for construction phase and in production procedures for operational phase
- ❖ To ensure that all contractors and sub-contractors follow strictly relevant legal and other requirements during construction phase
- ❖ To ensure all relevant legally required documents are readily available on site by the project proponent's personnel, contractors and sub-contractors such as licenses, permits, approval applications
- ❖ To conduct environmental compliance audit at least annually during operational phase
- ❖ To ensure implementation of company's CSR program
- ❖ To ensure compliance with company's OSH policy
- ❖ To submit the environmental monitoring report biannually.

The commitments regarding with environmental, social and health related considerations by Myanmar Asia Optical International Company Limited and its principal contractor for respective environmental components are described in below table.

Table 3-10 List of Key Commitments

Sr.	Field	No.	Commitment	EMP	Responsible Organization	
No.	rieid	110.	Communent	Reference	MAOI	Contractor
I	General	1	The relevant Myanmar laws, rules and regulations as follows will be complied with:  National Environmental Policy (2019)  Environmental Conservation Law (2012)  Environmental Conservation Rules (2014)  EIA Procedures (2015)  National Environmental Quality (Emission) Guidelines (2015)	Chapter-3	1	1
		2	MAOI/ Contractor will comply with relevant targeted air quality, water quality and noise level.	Chapter-3	1	1
		3	MAOI/ Contractor will comply and implement the environmental management plan (EMP), mitigation measures and monitoring plan formulated from this EMP for operation and decommissioning phases.	Chapter-7 and Chapter-8	√	7
		4	The company will implement all of the items in the list of commitments	Chapter-3	٧	٧
II	Air Quality	1	The project proponent set the target values of ambient air quality in accordance with the NEQG and US - EPA Guidelines.	Chapter-3	V	V
		3	To prevent air contaminants such as dust, particulate matters and exhaust gases during operation and decommissioning phases, the adequate mitigation measures will be implemented at both operation and decommissioning phases of the project.	Chapter-8	√ √	7
		3	Monitoring of air quality will be conducted in accordance with	Chapter-8	٧	

Sr.	Field	No.	Commitment	EMP		sponsible anization
No.	Tield	110.	Communent	Reference	MAOI	Contractor
			the EMP during both operation and decommissioning phases and respective monitoring reports will be submitted accordingly to ECD.			
III	Water and Wastewater Quality	1	During operation phase, the domestic wastewater will be discharged into the river through the drainage only after doing test to comply with NEQG target values for effluent.	Chapter-3, Chapter-5 and Chapter-5	V	
		2	During operation phase, the wastewater generated from factory operations, repair and maintenance activities will be collected into the wastewater treatment plant and only effluent from this plant after removing the oil wastes and slugs collected by outsourced contractor will be discharged into the river.	Chapter-2, Chapter-4 and Chapter-8	√	
		3	During decommissioning phase, wastewater generated from the domestic activities will be discharged into septic tank and collected by outsourced contractor. The wastewater from demolition activities will be discharged into the drainage only after passing through the settling ponds and inspection pit.	Chapter-8		1
		4	Direct discharges of all kinds of wastewater into the drainages will be strictly prohibited at both operation and decommissioning phases of the project.	Chapter-8	1	1
		5	Monitoring of water quality will be conducted in accordance with the EMP during operation and decommissioning phases to comply with target values set and respective monitoring reports will be submitted	Chapter-3 and Chapter-8	<b>V</b>	V

Sr.	Field	No.	Commitment	EMP		sponsible anization
No.	Field	110.	Communicat	Reference	MAOI	Contractor
			accordingly to ECD, Yangon Region.			
IV	Noise and Vibration	1	Adequate mitigation measures would be adopted and implemented at both operation and decommissioning phases of the project to comply with target noise and vibration levels set for the project.	Chapter-3 and Chapter-8	√ .	7
		2	During operation phase, the project proponent set the target value of Noise level in accordance with the NEQG Guidelines for ambient noise level.	Chapter-3 and Chapter-5	√	
		3	For noise and vibration control, setting the speed limit for vehicles, proper repair and maintenance of demolition-related vehicles during decommissioning phase.	Chapter-7		<b>V</b>
		4	Checking the operation of temporary septic tanks and temporary waste storage areas will be implemented during decommissioning phase.	Chapter-7		٧
V	Soil Contamination	1	Soil contamination due to accidental leakage and spillage of diesel and oil can be mitigated by paving with concrete floor and by applying systematic fueling system.	Chapter-7	√	<b>√</b>
VI	Wastes	1	For operation phase, MAOI is committed to follow the waste management plan and the brief descriptions of it is:  Waste segregation  Food waste Hazardous waste	Chapter-4, Chapter-7 and Chapter-8	√	
			<ul><li>➢ Non-hazardous waste</li><li>Waste minimization</li><li>➢ Reuse and recycle where</li></ul>			

Sr.	Field	No.	Commitment	EMP	Responsible Organization	
No.	1 1010	1100		Reference	MAOI	Contractor
			possible  Waste disposal  Dispose and handle according to ECD Guideline  Dispose by the authorized waste collector  Sell to recycler for recyclable waste			
		2	For decommissioning phase, contractor will follow the waste segregation plan, waste disposal plan and waste handling procedures described in EMP.	Chapter-8		V
VII	Local Economy and Social Consideration	1	Number of local staff and workers in MAOI will be recorded as necessary to know the job employment for local people.	Chapter-7	V	
		2	The project proponent must give employees compensation for suffering during decommissioning phase.	Chapter-7	√	
VIII	CSR Activities	1	Donations at wards and villages nearby and Social Welfare Programs, etc. will be recorded yearly.	Chapter- 10	٧	
IX	Occupational Health and Safety	1	The relevant regulations/ rules of labors' rights, health and safety as follows will be complied with:  The Workmen's Compensation Act (1923, Amendment in 2011)  The Leave and Holiday Act (1951, Partially Amendment in 2014)  The Labor Organization Law (2011)  The Labor Organization Rule (2012)  The Labor Dispute Settlement Law (2012, Amendment in	Chapter-3	V	V

Sr. No.	Field	No.	Commitment	EMP Reference		sponsible anization
NO.				Keierence	MAOI	Contractor
			<ul> <li>The Social Security Law (2012)</li> <li>The Employment and Skill Development Law (2013)</li> <li>The Minimum Wage Law/Rules (2013)</li> <li>The Social Security Rules (2014)</li> <li>The Payment of Wages Law (2016)</li> <li>The Myanmar Occupational Health and Safety Law (2019)</li> </ul>			
		2	The adequate measures and plans for occupational health and safety of staff and factory workers will be implemented in accordance with EMP to comply with Myanmar laws and regulations and other international practices for OHS during operation and decommissioning phases of the project.	Chapter-7	√	7
		3	Accidents and incidents, OHS trainings and drills, Health Check-up and other OHS concerned issues will be recorded and prepared the report yearly.  Reports for claims from workers will be prepared monthly during operation stage.	Chapter-9	V	
X	Community Health and Safety	1	Ensuring that vehicles are delivering materials preferably during weekend and off-peak hours as much as possible when traffic volume is low. Covering of materials is to be done during transportation.  Strict enforcement of on-site speed controls.	Chapter-7	V	V

Sr. No.	Field	No.	Commitment	EMP Reference		ponsible anization Contractor
XI	Emergency Risks	1	Occurrences of the risks of flood, fire and earthquake will be recorded at the time of occurrence and included in the monitoring report to be submitted to ECD, Yangon Region.	Chapter-9	1	1
		2	MAOI has installed suitable firefighting system and established the emergency response team for the fire and natural disaster emergency.	Chapter-8 and Chapter-9	V	
XII	Training and Education	1	<ul> <li>MAOI will implement</li> <li>the training program for new workers</li> <li>Other capacity building program for skill workers and</li> <li>Emergency response training for all workers for fire and natural emergency.</li> </ul>	Chapter- 10	7	
XIII	Reporting	1	MAOI and demolition contractor will submit monitoring reports during operation and decommissioning phases regularly to the ECD, Yangon Region according to the EIA procedure or as necessary.	Chapter-8	V	V

## 4.0 DESCRIPTION OF THE PROJECT

## 4.1 Project Location

The factory-2 of Myanmar Asia Optical International Company Limited is located at Plot No. (C1, C2), Mingaladon Industrial Park, Mingaladon Township, Yangon Region, Myanmar. It is located in the Mingaladon Industrial Park and the geographical coordinates of project site is as follows:

Latitude: 16° 56' 27.56" N Longitude: 96° 09' 26.33" E



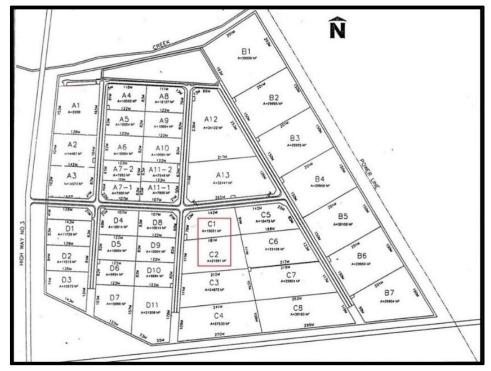


Figure 4-1 Location of the Factory

## 4.2 Area and Land Ownership

The area and land ownership of the factory-2 is as follow:

Factory Area: 36,622.88 m<sup>2</sup>

Type of Land: Industrial Land

Land Acquisition: Lease Land

Owner/Lessor of the Land: Mingaladon Industrial Park Co., Ltd.

Lessee of the Land: Myanmar Asia optical International Co., Ltd.

(MAOI)

## 4.3 Site Description

## 4.3.1 Site Accessibility

Mingaladon Industrial Park (MIP) is located just beside the No.3 Main Road. The factory-2 is located beside the entrance road of the MIP. After passing through the main entrance gate, drive straight to the east for two streets, the factory-2 is located on the right side of the road. (See in **Figure 4-2**)



Figure 4-2 Access Road to the Proposed Project

### **4.3.2** Site Boundaries and Surrounding Environment

The factory is surrounded on the four sides as follows: (See **Figure 4-3**)

East Side: Designtime Myanmar Co., Ltd.
 West Side: Linda Fashion Myanmar
 Left Side: Myanmar Postarion Co., Ltd.
 Right Side: Myanmar DYC Shoes Factory



Figure 4-3 Surrounding Environment of the Factory-2

## 4.4 Financial Information and Investment Plan

## **4.4.1** Financial Information

MAOI is wholly foreign-owned and the financial information is as follow.

Table 4-1 Financial Information

Type of Investment	100% Foreign Investment
Type of Business	Manufacturing
Amount of Foreign Capital	USD 12.880 Million
<b>Total Amount of Investment</b>	USD 23.558 Million
Number of Shares	45,123 Shares
Type of Share	Ordinary ( USD 6,000 per one share)
Validity of Investment Permit	45 years

Table 4-2 Changed Amount in Total Amount of Foreign Capital

Sr. No.	Year/Date	Changed Amount of Foreign Capital (Million in USD)
1.	2003	12.88
2.	31.1.2015	12.929
3.	28.2.2017	13.580
4.	12.6.2017	14.113
5.	16.8. 2017	16.038
6.	26.1. 2018	16.838
7.	31 .8.2018	17.821
8.	25.4. 2019	20.732

Sr.	Year/Date	Changed Amount of Foreign
No.	1 ear/Date	Capital (Million in USD)
9.	6.6. 2019	22.411
10.	11.7. 2019	22.890
11.	5.12. 2019	23.236
12.	23.12.2019	23.558

#### 4.4.2 Investment Plan

The investment plan of MAOI is as follows:

Table 4-3 Investment Plan

Sr.	Particulars			Amou	nt (USD)			Total
No.	Particulars	2002	2003	2004	2005	2006	2007	(USD)
1.	Foreign	170,000	400,800	100,299	-	-	-	671,099
	Currency							
	Working							
	Capital							
2.	Value of	-	1,333,911	1,593,815	1,547,822	1,696,979	1,594,142	7,766,669
	Machines							
3.	Value of	-	923,511	104,470	256,315	104,470	104,470	1,493,238
	Factory							
	Accessories							
4.	Value of Tools	-	86,271	49,269	28,177	22,096	31,019	216,831
5.	Value of Office	-	94,097	-	-	=	=	94,097
	Equipment							
6.	Factory	-	418,407	-	-	=	=	418,407
	Consumables							
7.	Value of Land	731,795	487,864	-	-	-	=	1,219,659
	Use Premium							
8.	Holding Value	-	=	-	-	-	=	-
	Total	901,795	4,744,861	1,847,853	1,832,314	1,823,545	1,729,631	12,880,000

Source: MAOI

## 4.5 Working Hour and Manpower Requirement

## 4.5.1 Working Hour

There is one shift for management office and two shifts for factory operation and normal working hour is 8 hours per day from Monday to Saturday. The following table shows the detailed working hours.

Table 4-4 Working Hour of the Factory

Management Office					
No. of Shift	1 S	hift			
Monday ~ Saturday	07:30 a.m. ~	· 04: 30 p.m.			
Break	11:30 a.m. ~ 12:30 p.m.				
	Factory Operation				
Day Shift Night Shift					
Monday ~ Saturday	day 7:30 a.m. ~ 4: 00 p.m. 7:30 p.m. ~ 4:00 a.m.				

Break	11:30 a.m. ~ 12:00 p.m.	11:30 p.m. ~ 12:00 a.m.
Overtime (OT)	4:00 p.m. ~ 7:30 p.m.	4:00 a.m. ~ 7:30 a.m.

## 4.5.2 Manpower Requirement

Manpower is the main requirement for the operation of every project. To perform the operation and maintenance of the factory, the project proponent needs to control the employees in the best way. The manpower requirement of the project is as follows.

Table 4-5 Human Resources Requirement

Sr. No.	Position	No. of Persons (Factory-2)						
	Foreigners							
1.	Engineers	-						
2.	Operational	-						
	Experts							
3.	Senior Managers	2						
4.	Technicians	11						
	Sub-total	13						
	Local							
1.	Team Leaders	-						
2.	Line Leaders	22						
3.	Monitors	12						
4.	Technicians	3						
5.	Workers	128						
	Sub-total 165							
	Total	178						

## **4.6** Infrastructure of the Factory

The layout and photos of project sites showing existing buildings and infrastructures including production area, office area and internal roads etc. are shown in **Figure 4-4 and Figure 4-5.** 

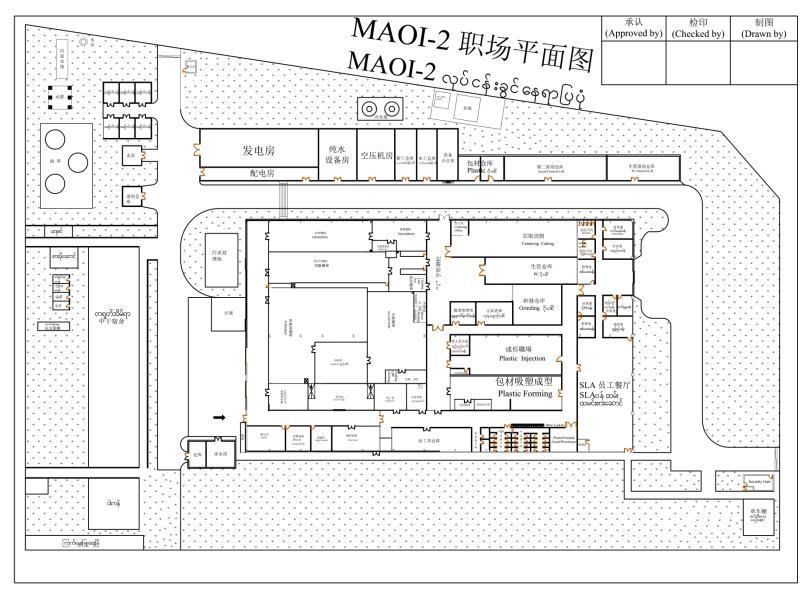


Figure 4-4 Factory-2 Layout Plan



Figure 4-5 Photos of Office and Factory Buildings (MAOI-2)

## 4.7 Raw Materials and Subsidiaries

#### 4.7.1 Raw Materials

The basic raw materials for manufacturing the plastic parts for electronic apparatuses and SLA are plastic granules and SLA rod (glass fiber filaments) respectively. The raw materials for factory-2 are imported from China (Hong Kong) and Japan.





Figure 4-6 Raw Materials and Raw Materials Storage Area

Table 4-6 List of Raw Materials for Plastic Packing Processing

Sr. No.	Commodity Name	Specifications	Yearly Consumption	Unit	Mode of Transport	Project
1.	PE/PE Film	0.04*1020 mm	1,200	KG	Air/Sea/Road	PC Plastic Forming
2.	Transparent Acrylic Board	1200*560*25mm	250	Pcs	Air/Sea/Road	PC Plastic Forming
3.	Anti-static Mat	-	1	Roll	Air/Sea/Road	PC Plastic Forming
4.	Masking Tape	45MM*50Y	2,400	Pcs	Air/Sea/Road	PC Plastic Forming
5.	Black Sanding Pad	-	90	Pcs	Air/Sea/Road	PC Plastic Forming
6.	Anti-static Curtain	-	6	Roll	Air/Sea/Road	PC Plastic Forming
7.	Ultrasonic Generator	1800W AC220V 50HZ 28KHZ	3	Pcs	Air/Sea/Road	PC Plastic Forming
8.	Blister Sprinkler	A-100	20	Pcs	Air/Sea/Road	PC Plastic Forming
9.	Adsorption Mold Gypsum Powder	-	50	KG	Air/Sea/Road	PC Plastic Forming
10.	PET /PET Sheet	-	200,000	KG	Air/Sea/Road	PC Plastic Forming
11.	Paper Box (BCBX0005-5)	620*470*450	500	Pcs	Road	PC Plastic Forming
12.	Paper Box (BCBX0008-8)	630*520*260	400	Pcs	Road	PC Plastic Forming
13.	Paper Box (BCBX0009-9)	470*395*630	200	Pcs	Road	PC Plastic Forming

Table 4-7 List of Raw Materials for Plastic Parts for Camera Production

Sr. No.	Commodity Name	Specifications	Yearly Consumption	Unit	Mode of Transport	Project
1.	Plastic Granule PC-GSH2020R2-979G	Bisphenol A and carbon	10,000	kg	By road	Plastic Injection/
		oxychloride, containing 20%			(china)	Drying Process
		glass fiber				
2.	Plastic Granule PC-LS3302-K24235	Bisphenol A and carbon	5,000	kg		
		oxychloride				
3.	Plastic Granule PC-GSH2020LR-Y083	Bisphenol A and carbon	1,000	kg		
		oxychloride, containing 20%				
		glass fiber				
4.	Plastic Granule PC-GF1210-BLK	Bisphenol A and carbon	62,000	kg		
		oxychloride, with glass fiber				

Sr. No.	Commodity Name	Specifications	Yearly Consumption	Unit	Mode of Transport	Project
		10%				
5.	Box	-	3,000	Pcs	By road	Packing Process
					(Myanmar)	(Recycling)
6.	PE Plastic	-	50,000	Pcs		Packing Process
7.	Blister Pack	-	528,000	Pcs		Packing Process
						(Recycling)
8.	Dummy Plate	-	48,000	Pcs		Packing Process
						(Recycling)

Table 4-8 List of Raw Materials for SLA Production

Sr. No.	Commodity Name	Specifications	Yearly Consumption	Unit	Mode of transport	Project
1.	Self-Focus Lens Array Rod	-	115,761,672	Pcs	Air/Sea	Self-focus Lens Array
						(SLA) Process
2.	Fiber Reinforced Plastic	-	714,240	Pcs	Air/Sea/Road	Self-focus Lens Array
						(SLA) Process
3.	Sponge Pad	575*340*19 (mm)	1,863	Pcs	Air/Sea/Road	SLA Packing Process
4.	Sponge Pad	575*410*20 (mm)	6,341	Pcs	Air/Sea/Road	SLA Packing Process
5.	Paper Pad	330*230 (mm)	60,804	Pcs	Air/Sea/Road	SLA Packing Process
6.	Paper Box	350*250*160 (mm)	14,390	Pcs	Air/Sea/Road	SLA Packing Process
7.	Paper Box	800*360*190 (mm)	4,620	Pcs	Air/Sea/Road	SLA Packing Process
8.	Paper Box (Big)	-	600	Pcs	Air/Sea/Road	SLA Packing Process
9.	Paper Pallet	-	600	Pcs	Air/Sea/Road	SLA Packing Process

## 4.7.2 Chemical Usage

In the manufacturing processes of plastics parts and SLA, chemicals used in almost every stage are listed in **Table 4-9** and Table **4-10**.

Table 4-9 List of Chemicals for Use on Plastic Parts of Camera Processing

Sr.	Commodity Name	ERP No Specifications		Yearly Cons	umption	Used Process
No.	Commounty Name	EXI NO	Specifications	Quantity	Unit	Oseu I Tocess
1.	Ethyl Alcohol	-	-	15	1	Injection
2.	Acetone	-	-	30	1	Mould Room

1 = litre(s)

Table 4-10 List of Chemicals for Use on SLA Processing

Sr.	Commodity Name	ERP No	Specifications	Yearly Consumption		Used Process
No.	Commounty Name	ERF NO	Specifications	Quantity	Unit	Used Flocess
1.	Rare Earth Polishing Powder	D192128	S-204	14,208	kg	SLA-Polishing process
2.	Lapping Emery (SiC, silicon carbide	-	GP-1200 FULTECH	24,000	kg	SLA-Grinding process
	abrasive powder)		CIF			
3.	Optical Adhesive A-01	-	A-01	33,600	Pcs	SLA-Gluing process
4.	Cutting Fluid	-	S-100	12,000	kg	SLA-Slicing process
5.	G 17 Adhesive	L042308	G 17, Chloroprene	6,120	ml	SLA-Polishing process
			rubber solvent-based			
			adhesive			
6.	Metal Polish	-	75ml/3.33oz	75	ml	SLA-Primary forming process (to
						polish the Groove fixation)

kg = kilogram(s), Pcs = pieces, ml = miilitre(s)

## 4.8 Utilities

#### 4.8.1 Generators

There are two generators in the factory-2. They are one unit of 1,000 kVA and two units of 1,500 kVA.

The specification of the generators is as follows:

Table 4-11 Specification of the Generators

Sr. No.	kVA	Voltage	Type/Model	Serial No.
1.	1,500	230/440	GMS1500C	PL6085/1
2.	1,000	230/400	OD1000C	PL6477/1



Figure 4-7 Generators and Generator Room at Factory-2

#### 4.8.2 Electricity

Electricity is transmitted from existing national grid line to the Company's electrical system by connecting with one unit of transformer in the factory-2. The necessary guidelines and precautionary measures relating to the use of electricity shall be adhered to. The internal infrastructure has to be designed. The necessary layouts and cable sizes needed are to be determined for the projected electrical demand.

Annual electricity requirement for the factory-2 is tabulated in **Table 4-12**.

For lighting, air-conditioning, air ventilation system and the production sectors, electricity is consumed continuously for the whole working time of the factory.

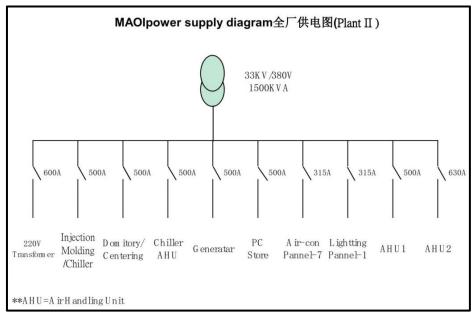


Figure 4-8 Power Supply Distribution Plan of Factory-2



Figure 4-9 Transformer at Factory-2

Table 4-12 Electricity Consumption

Sr.	Month	Electricity Consumption (kWh)				
No.	Month	2019	2020	2021	2022	
1.	January	292,998	266,982	322,416	225,036	
2.	February	261,636	276,426	291,672	162,324	
3.	March	300,876	352,350	339,972	114,606	
4.	April	221,814	154,218	300,486	-	
5.	May	239,724	338,466	355,830	-	
6.	June	202,374	326,118	340,920	-	
7.	July	332,616	302,742	320,274	-	
8.	August	328,200	327,714	363,324	-	
9.	September	315,354	-	324,426	-	
10.	October	274,752	-	285,042	-	
11.	November	287,910	267,300	276,618	-	
12.	December	268,056	317,592	257,886	-	
Total		3,326,310	2,034,150	2,824,806	-	

#### 4.8.3 Fuel Requirements

Diesel is used as fuel for generators and cars. It is bought from Aye Nyein Thar Co., Ltd. and Kyaw San Co., Ltd. and stored in separated area with two 7,000 gallons capacity diesel storage tanks.

Table 4-13 Diesel Collsumbuo	Table 4-13	B Diesel	Consumpti	on
------------------------------	------------	----------	-----------	----

Sr.	Month	Diesel Consumption (gallons)				
No.	MIOHH	2019	2020	2021	2022	
1.	January	380	974	594	2948	
2.	February	276	421	700	3896	
3.	March	619	1178	316	16838	
4.	April	2,161	766	692	-	
5.	May	8,619	2149	1896	-	
6.	June	6,876	1091	2722	-	
7.	July	1,244	1190	2260	-	
8.	August	2,451	1400	1239	-	
9.	September	800	684	897	-	
10.	October	659	246	1300	-	
11.	November	548	525	1115	-	
12.	December	288	1301	2174	-	
	Total	24,921	11,925	15,905	-	



Figure 4-10 Diesel Storage Tanks in Factory-2

#### 4.8.4 Water Requirement

Water is used in processes, domestic use and drinking. The raw water pumped from tube-wells is treated in water treatment system before using. The water sources are as follows:

Tube well (6" x 600') 2 units

MIP Water Supply Tap 1 unit

The project proponent provided Reverse Osmosis (RO) system to purify water. The water quality is tested regularly at the national health laboratory and results are displayed in **Figure 4-11**. The process of pure water treatment system is

mentioned in below. This Regeneration System is used to put Resin Chemical, which is used to reduce the lime.











Figure 4-11 Drinking Water Test Results





Figure 4-12 Water Treatment Systems at Factory-2



Figure 4-13 Chemicals used in Pure Water Process



Figure 4-14 Water Storage Tanks

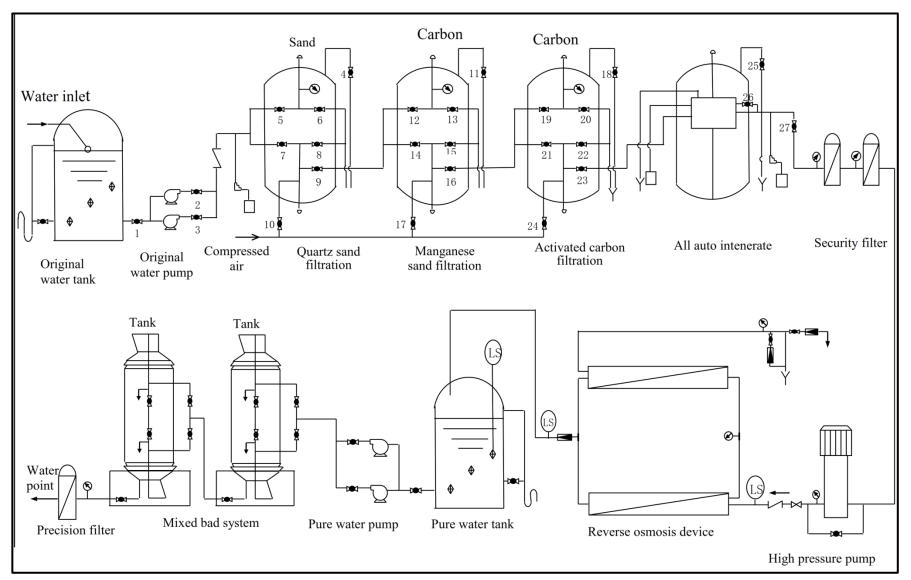


Figure 4-15 Water Treatment System Process Flow

Table 4-14 Annual Water Consumption (Tube Well)

Sr.	Month	Water Consumption (m <sup>3</sup> )				
No.	MIOHH	2019	2020	2021	2022	
1.	January	5,189	4,800	1,844	5,600	
2.	February	5,008	4,710	1,913	5,400	
3.	March	3,504	4,011	2,159	5,011	
4.	April	6,282	4,668	2,061	1	
5.	May	4,815	4,522	2,018	1	
6.	June	4,696	3,977	1,025	1	
7.	July	5,978	4,378	1,834	1	
8.	August	4,589	3,991	1,951	-	
9.	September	3,990	3,972	1,977	-	
10.	October	6,044	1,610	2,020	-	
11.	November	4,737	3,244	2,038	-	
12.	December	5,630	4,088	2,066	-	
	Total	60,462	47,971	22,906	-	

Table 4-15 Annual Water Consumption (MIP Water Supply Tap)

Sr.	Month	Water Consumption (m <sup>3</sup> )			
No.	Month	2019	2020	2021	2022
1.	January	1,800	8,122	1,844	2,426
2.	February	2,213	8,134	1,913	2,270
3.	March	1,559	7,565	2,159	1,640
4.	April	2,261	9,780	2,061	-
5.	May	1,228	10,351	2,018	-
6.	June	925	8,460	1,025	-
7.	July	1,234	8,760	1,834	-
8.	August	1,751	8,938	1,951	-
9.	September	1,377	6,647	1,977	-
10.	October	1,335	0	2,020	-
11.	November	2,280	14,933	2,038	-
12.	December	2,181	21,679	2,066	-
	Total	20,144	260,993	22,906	-

Table 4-16 Pure Water Consumption for General Use

		Purc	Pure Water Consumption (m <sup>3</sup> )			
Sr. No.	Month	2019	2020	2021	2022	
1.	January	2,090	1,811	2,286	1,987	
2.	February	1,972	2,038	2,001	2,016	
3.	March	1,555	1,780	2,189	1,618	
4.	April	1,983	2,484	2,039	-	
5.	May	2,097	2,069	1,652	-	
6.	June	2,151	2,152	1,945	-	
7.	July	2,065	2,129	1,863	-	
8.	August	1,999	2,148	2,280	-	

		Purc	Pure Water Consumption (m <sup>3</sup> )			
Sr. No.	Month	2019	2020	2021	2022	
9.	September	1,764	2,626	1,689	-	
10.	October	2,275	2,389	2,314	-	
11.	November	2,157	2,060	2,405	-	
12.	December	2,209	2,223	2,115	-	
	Total	24,317	25,909	24,778	-	

## 4.9 Machinery and Equipment List

The machinery and equipment for each process are listed in the following tables.

Table 4-17 List of Machinery and Equipment for Optical Lens and Plastic Parts Production

Sr. No.	List of Items	Quantity	Unit	Used for
1	Four Post Hydraulic Cutting Machine	3	set	Plastic Packing
2	Molding Machine	1	set	
3	Special Plastic Suction Forming Machine	1	set	
4	Anti-static tester	1	set	
5	FANUC S-2000i 50A Injection Molding Machine	6	set	Plastic Injection
6	FANUC S-2000i 100A Injection Molding Machine	8	set	
7	FANUC S-2000i 100B Injection Molding Machine	2	set	
8	SE100DU Injection Molding Machine	2	set	
9	E50DU Injection Molding Machine	2	set	
10	Water Mold Temperature Machine/wtc-1009	10	set	
11	Oil Mold Temperature Machine/otc-1009	10	set	
12	Chilling Water Machine/rw-1004	5	set	
13	Dehumidifying and drying feeder machine/ksd-	20	set	
	$50 \text{kg/} 80 \text{m}^3$			
14	Mold CCTV/guarder t-k-601	20	set	
15	Conveyor Machine/11350*400*1500 mm	20	set	
16	Low Noise Crusher Complete Set/ <u>DLG</u> 150	1	set	
17	Single Screw Plastic Granulator Complete Set	1	set	
18	Vertical mixer/hms100	1	set	
19	Mold Cleaning Machine	1	set	Plastic Injection
20	Water Cool Screw Chiller	1	set	

Table 4-18 List of Machines for SLA Production

Sr. No.	List of Items	Quantity	Unit	Used Process
1	Drying Machine or Temperature	3	set	Pretreatment before
	Chamber			Forming
2	Primary Forming Machine	4	set	Forming
3	Secondary Forming Machine	7	set	
4	Ultrasonic Cleanser	1	set	
5	Slicing Machine	3	set	Slicing

Sr. No.	List of Items	Quantity	Unit	Used Process
6	Drying Machine or Temperature	12	set	
	Chamber			
7	Grinding Machine	6	set	Grinding
8	Cleaning Bench	2	set	SLA-Rod Checking
9	Polishing Machine	2	set	Polishing
10	Reconditioned Hydraulic Lift	1	set	
11	Slicing Machine with Accessories	1	set	Edge Cut
12	Curve Generator Machine	1	set	
13	Drying Machine	11	set	Cleaning (heating)
14	Ultrasonic Cleaning Machine	16	set	Side Face Cleaning
15	Cleaning Bench	2	set	Cleaning
16	Automatic Dropper	6	set	Glue or Adhesive Process
17	Optical Performance Inspection Machine	1	set	Light Inspection
18	Appearance Inspection Machine	9	set	Appearance Inspection
19	Automatic Taping Machine	2	set	Packing
20	Automatic Belt Machine	2	set	
21	Vacuum Packaging Machine	3	set	
22	Cleaning Bench	4	set	

## **4.10 Product Profile and Production Plan**

The proposed investment business in factory-2 is the manufacturing of plastic parts for camera and self-focus lens array (SLA). The production capacities are presented in **Table 4-19** and all are exported China (Hong Kong) and Japan.

Table 4-19 Production Plan

Sr. No.	Particulars	Quantity	Units
1.	Plastic Parts for Camera		
	VL301312199-F	182,600	Pcs per month
	V L301312299-H	220,000	Pcs per month
	VL300212299-N	116,600	Pcs per month
	VL300212199-L	182,600	Pcs per month
	VL300212299-F	220,000	Pcs per month
	GG361201099-D	165,000	Pcs per month
	GG361201099-E	165,000	Pcs per month
2.	SLA	25,600,000	Pcs per year





Figure 4-16 All Kinds of Plastic Parts

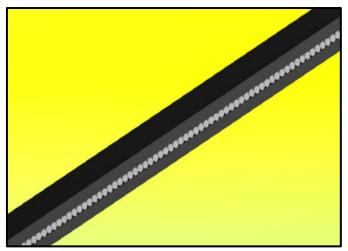


Figure 4-17 Self-Focus Lens Array (SLA) (Glass Tube)

## 4.11 Transportation of Raw Materials and Products

Air, road and sea transportation are taken into account for the imported raw materials, machineries and equipment. The finished products are exported to abroad by air or ship. In the production area, trolley, forklift and various types of conveyor carry out transportation.







Figure 4-18 Forklifts used in MAOI

### **4.12** MAOI (2) Production Process

There are three kinds of products manufactured in MAOI for export, which are various kind of optical lens, plastic parts for electronic apparatuses and self-focus lens array (SLA). Among them, plastic parts for camera and self-focus lens array (SLA) including plastic lens cases for various kind of optical lens are manufactured at factory-2.

Process flow diagram of these manufacturing processes in MAOI-2 and a brief description of each process steps in general are shown as below.

## **4.12.1 Plastics Lens Case (Plastic Forming)**

The detail flow diagram of optical lens case manufacturing process.


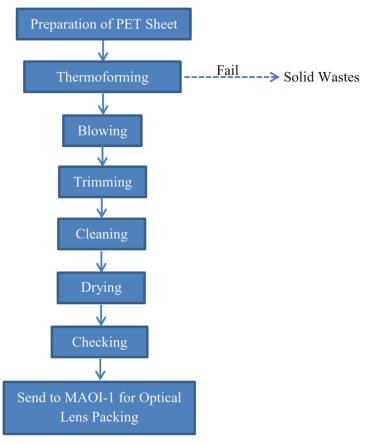


Figure 4-19 Process Flow Diagram of Optical Lens Cases Manufacturing Process

**Preparation of PET Sheet:** PET (Polyethylene Terephthalate) plastics sheet is used as main raw for plastics for manufacturing of lens cases. The PET sheet roll is set up in the thermoforming machine.



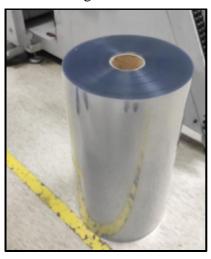

**Thermoforming:** Thermoforming is a manufacturing process where a plastic sheet is heated to a pliable forming temperature, formed to a specific shape in a mold, and trimmed to create a usable product.

The plastic sheet passes through the thermoforming machine to form a specific shape in the mold. If the process is failed, they are disposed as solid wastes.










**Blowing:** The plastic cases come from thermoforming machines are cleaned by blowing air to remove dust and dirt.

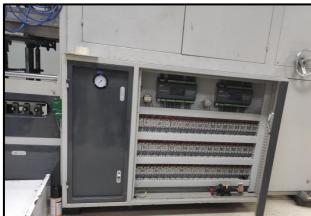







**Trimming:** The shaped plastic sheets are trimmed with frame in the trimming machines. The trimmed are sent to the plastics cleaning room.





**Cleaning:** The five solution tanks (1.5 x 2 x 1 ft<sup>3</sup>) are used for cleaning.

The plastic components are immersed in the  $1^{st}$  tank (soap tank) for 2 minutes and immersed in the  $2^{nd}$  tank filled with ethanol (3) g and water about 2 minutes. The water needs to be changed every 12 hours.

After immersing in the two tanks, it is immersed in the  $3^{rd}$ ,  $4^{th}$  and  $5^{th}$  tanks filled with water for 2 minutes respectively. This water needs to be changed every 8 hours.








**Drying:** The cleaned plastic cases are dried in the drying machines.



**Checking:** After drying, the dimension and quality of the plastic components are checked by mixed solution and light.







**Packing:** Finally, some finished products are transported to the factory 1 (A2 & A3) for packaging optical lens and others are transported to the packaging station to sell other factories.

#### **4.12.2** Plastic Parts for Camera (Injection Molding Process)

The detail flow diagram of plastic part process is described in below.

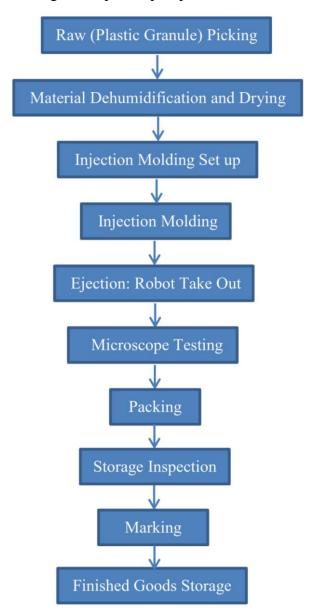


Figure 4-20 Process Flow Diagram of Plastic Parts Manufacturing Process

A camera lens has many interlocking, molded plastic components of various shapes that surround the lens element. This position on the production line manufactures the precision plastic components that are critical to optical products, fabricates, and controls the metal molding dies that are used to make the plastic components.



Inside the molding station, more than 10 molding machines are lined up. The machines manufacture plastic molding components for different lenses.

Plastic components include such parts as the focusing ring, which is rotated to bring the lens into focus, the lens barrels and the frames that keep the lens element secure in the designated position. All the plastic components are manufactured through this molding process.

The basic process starts by placing the raw plastic into a molding machine that has been fitted with the appropriate metal mold. The plastic is heated, cooled and dried, before finally emerging from the molding machine as a finished component that has been precisely molded into the designated shape.

Plastic pellets that are used to make the components. The ratio at which the plastics are combined is altered for each component.



**Raw** (**Plastic Granule**) **Picking:** PC (Polycarbonate or Polycarbonate) resin is used as main raw materials. According to the daily production plan and order quantity budget material consumption, get the picking list from the production control department, and fill in the required quantity and use the trolley to pull it back to the workshop and place it next to the corresponding machine to be switched.



**Material Dehumidification and Drying:** The drying machine is cleaned to be used, make sure it is clean. The materials are put into the dryer barrel. The drying temperature is set up at 120 °C and time is required about 4-5 hr for the material to ensure that the material is fully dried.




Figure 4-21 Dehumidifying and Drying Feeder Machine

**Injection Molding Set up**: This step includes mold loading and material pipeline heating up.

Firstly, the mold is placed into the injection-molding machine and the temperature of the mold temperature machine is set up to heat the mold. The required temperature of the mold is set between  $80 \sim 160$  °C. The required temperature for materials is  $260\sim290$  °C or  $270\sim320$  °C.




**Injection Molding (Feeding Materials/ Material Melting/ Injecting):** The materials are pumped from the dryer to the hopper, plastic granules dropping onto screw thread are melted in the barrel, the molten plastic moved by rotating screw thread and injected into the mold.

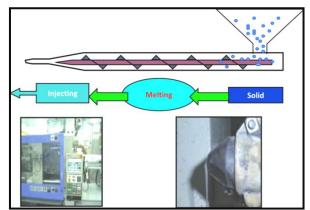

**Injection molding (Cooling down):** Once the mold is filled completely, the plastic part is allowed to cool for the just the amount of time required to harden the material. Cooling time is dependent on the type of resin used and the thickness of the part. Normally cooling time is about 7~8 second, and the other maybe 20~30 second needed.

While the part cools, the barrel screw retracts and automatically draws new polymer resin into the barrel from the material hopper. The heater bands maintain the needed barrel temperature for the type of resin being used to ensure proper molding.

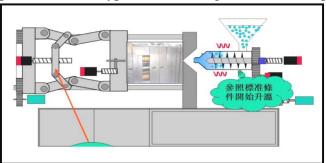

**Ejection** (**Robot Take Out**): The parameters such as the descending, forward, backward, ascending, waste disposal, defective product disposal and packing position of the robot are adjusted, so that the products can be moved smoothly from the mold and placed on the conveyor belt to allow the injection molding machine automation.

Waste: leftovers, waste disposal, defective product disposal

Waste Recycling: Pull them to the crushing room for crushing, and for recycle use



**Microscope Testing:** After the machine is automated, independent inspections are conducted and compared with the same products to ensure that the appearance is "OK". The completed parts are then inspected for quality, weight, size, etc.



**Packing:** Box, PE plastic, blister pack and dummy plate are used for packing. The parts are picked up into the designated blister. When the quantity is enough, packing is started and strictly follow the "Packing mode".





**Storage Inspection:** Before the parts are packed in the box and put into the warehouse. IPQC (Import Process Quality Control) and OQC (Outgoing Quality Control) will check the products in the warehouse to confirm that the appearance and packaging of the products meet the customer's requirements.



**Marking:** After the IPQC and OQC inspections are completed, stamp on the label of the outer box and mark it.



**Finished Goods Storage:** The finished goods are pulled into the finished product warehouse and put them according to the part name on the shelf, open the warehouse receipt, and pack the goods when there is demand for shipment.





Figure 4-22 Finished Products

## **4.12.3** Self-Focus Lens Array (SLA) (Glass Tube)


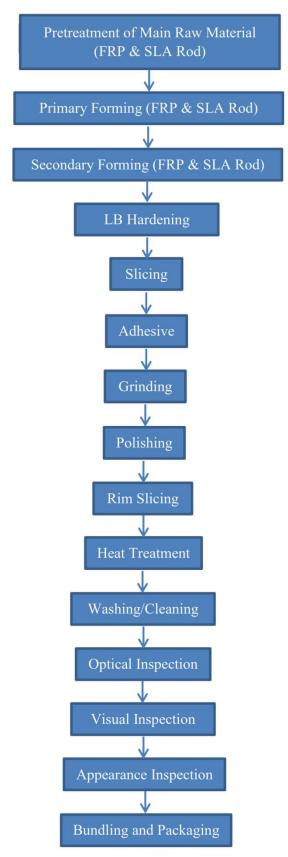


Figure 4-23 Process Flow Diagram of SLA Manufacturing Process

**SLA Rod (Glass Fiber Filaments):** A cutting blade is used to cut the long strands (Glass Fiber Filaments) into short strands (1 long strand is cut into 2 short strands). Then, fiber washing machine system and fiber drying oven are used to wash and dry, and used as a post-engineering (Forming Process).





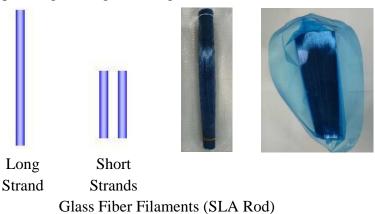




Fiber Cutting Machine

Fiber Washing Machine System

Fiber Drying Oven

**Pretreatment of Main Raw Material (FRP & SLA Rod):** The fiber reinforced plastics (FRP) board which is made of epoxy glass cloth laminated material and resin paste is put into the oven at 105 °C to bake, and the board and resin are fused.





FRP Board

Roaster


**Primary Forming (FRP & SLA Rod):** The plain SLA rod (glass fiber filaments) is glued with the pre-treated FRP board, the SLA rod thread is neatly arranged once and the groove of the primary forming machine is formed. The FRP board is manually

placed, pressed down on the machine platen for 60 s, and pressed one FRP board is glued together with 760 strands, called one time forming LB.





Pressing of FRP






**Primary Forming Machine** 

LB

**Secondary Forming (FRP & SLA Rod):** The LB completed in primary forming operation is glued with one FRP board. The operator manually aligns it and places it on the heating platform of the secondary forming machine. Through the movement of the heating platform and the rotation of the roller, the FRP board and the SLA-rod can be fixed and bonded together. Four LB can be pressed in one operation.







Secondary Forming Machine

**LB Hardening:** The hardening work of LB is made strengthen after forming assembly through high and low temperature cycle work.





Drying Machine or Temperature Chamber

**Slicing:** The cutting fluid is used to lubricate and cool the blade to ensure that the high-speed cutting blade can cool down in time and prevent the blade from passivation. A piece of LB is cut into 40 pieces of SLA.



Slicing Machine

Adhesive: The 40 pieces of single SLA are fixed into a block by adhesive bonding.



**Grinding:** Use Lapping emery (silicon carbide abrasive powder) and water are matched with the cast iron grinding dish plate to rough-grind the lens surface of the subsequent block (1 block = 40 pcs SLA) to achieve the grinding process required for the size and surface accuracy of the finished product.



**Grinding Machine** 

**Polishing:** The lens surface of the grinding block is polished with polishing pad and S-204 polishing powder and water mixture to achieve the corresponding Z (thickness) dimension and surface accuracy.



Polishing Machine

**Rim Slicing:** The process of cutting both ends of the finished block is done with a cutting blade to make it meet the WT (length) requirements of the final SLA finished product.








Rim Slicing Machine

**Heat Treatment:** The block is placed after ear-cutting in a heat treatment furnace, and vaporize the glue used to bond the block through the high temperature of the heat treatment furnace, thereby separating the SLA form each other.



Drying Machine or Temperature Chamber

**Washing/Cleaning:** The glue and other dirt remaining on the side and end of the SLA are removed mechanically (nylon sheet) or manually, rinsed with clean water and dried to make it meet the appearance requirements of the final SLA finished product.







Ultrasonic Cleaning Machine

**Optical Inspection:** The SLA is placed on the optical inspection machine, and the optical performance of the SLA is confirmed by machine.



Optical Performance Inspection Machine

**Visual Inspection:** Whether there is any defect on the surface of the SLA lens is visually confirmed under the light source of 2300±200 Lux.



**Appearance Inspection:** The SLA is placed on the appearance inspection machine, and the machine determines the defective items that cannot be confirmed by the SLA visual inspection.






Appearance Inspection Machine

**Bundling and Packaging:** After wiping the good product SLA with clean cloth, it is vacuum-extracted and packed for delivery.





LOIN Cloth Packing Machine or Automatic Taping Machine

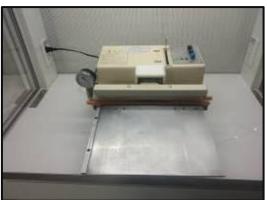



Vacuum Packaging Machine

## 4.13 Drainage and Sewage Disposal

There are drains running alongside the factory. Storm water is discharged into the drain. The industrial wastewater discharged from process is treated in the own wastewater treatment plant and discharged into the MIP centralized wastewater treatment plant. For convenience purpose, the project proponent provides 96 numbers of toilets (31 for males and 65 for females).













Figure 4-24 Basins and Drains in the Factory-2



Figure 4-25 Toilets in the Factory-2

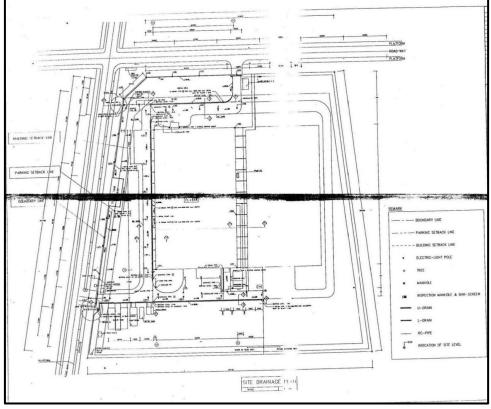


Figure 4-26 Drainage Layout of Factory-2

## 4.14 Waste Management System

#### 4.14.1 Wastewater Management

#### (a) Filter Press System

The wastewater generated from the processes are pumped into the filter presses and the liquid and sludge are separated passing through it. The liquid is discharged to the wastewater treatment plant and the substances that are retained on a filter as filter cake that are stored in box.



Figure 4-27 Filter Press at MAOI-2

#### (b) Builogical Treatment System

The wastewater treatment plant (WWTP) with biology treatment method is installed. It comprises of treatment units and equipment to treat wastewater collected from process of factory.


Influent, composition and concentration of wastewater are fluctuated time by time, therefore the plant is designed to have satisfactorily ability to treat those frequently concentration.

While the industrial wastewater is collected in high wastewater collection tank, the municipal wastewater is collected in tank and filtered with percolator. Both are passed into the equalization tank. In that, it acts as a buffer to collect the raw incoming sewage that comes fluctuating rates and pass it on to the rest of the sewage treatment plant at a steady flow rate to the biological aeration tank.

In municipal and industrial wastewater treatment, aeration is part of the stage known as the secondary treatment process. The activated sludge process is the most common option in secondary treatment. Aeration in an activated sludge process is based on pumping air into a tank, which promotes the microbial growth in the wastewater. The microbes feed on the organic material, forming flocks which can easily settle out. After settling in a separate settling tank, bacteria forming the

"activated sludge" flocks are continually recirculated back to the aeration basin to increase the rate of decomposition.

From the aeration process, the sludge and treated water are come out. The primary sludge is filtered and send to the sludge outsourcing. The treated liquid are stored in holding tank and then passed the sand filter. The sand filter is used as a step in the water treatment process of water purification to reduce. The final treated water is discharged to the drain.

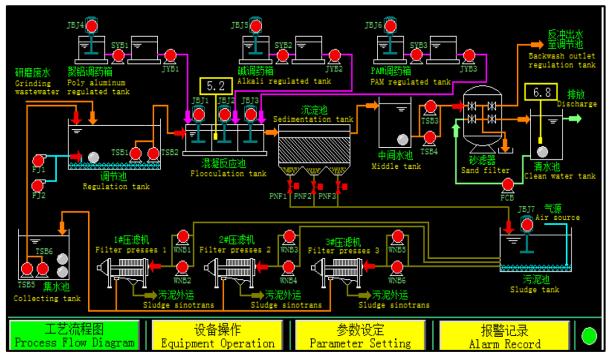

Source: MAOI

Figure 4-28 Wastewater Treatment System of Factory-2



Figure 4-29 Wastewater Treatment Plant (Factory-2)

#### **4.14.2** Solid Waste Management

The largest component of solid waste generated from this factory is pieces of broken plastic pieces and SLA parts. Other solid wastes and recyclables generated in much smaller amounts from optical lens factory include plastic waste, chemical packaging material, organic and domestic wastes form the living areas, canteen and restrooms.



Figure 4-30 Waste Bins

#### 4.15 Other Facilities

#### 4.15.1 Cooling System

Centralized cooling system is installed in chiller plants to provide cooling for an entire factory. This is because it is often more practical to centralize air conditioning equipment in one location rather than install many pieces of equipment in many different places. There are two chillers in the factory-2. Chillers are used to generate cold water for air conditioning by removing the unwanted heat from the building.

Cooling water flows through a closed piping system that circulates water through various pieces of equipment. The cooling water is piped to a cooling tower where the heated water is aerated to reduce its heat gain. It is located up on the roof and is the final destination for the unwanted heat in the building. It contains a large fan which blows air through the unit. The cooling water is pumped up to the cooling towers and it is sprayed into the air stream. The cool ambient air will enter and come in direct contact with the spray of cooling water (in an open cooling tower) this will allow the heat to transfer into the air and this air is then blown out into the atmosphere.

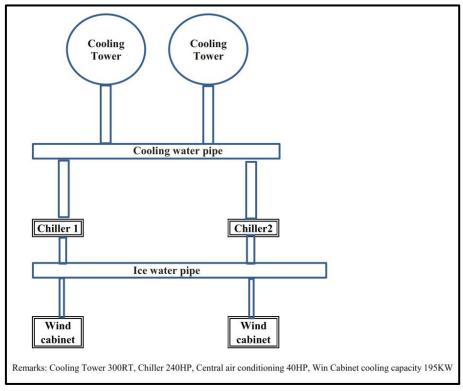


Figure 4-31 Air Conditioning System at Factory-2

#### 4.15.2 Ventilation System

Ventilation is an example of an engineering control method in which workplace hazard can be eliminated or reduced to acceptable levels. The use of personal protective equipment should not be the primary means to control exposure to paint and other material, unless substitution, engineering or administrative controls are not feasible.

A wide variety of volatile solvents is used in lens manufacture process. Exposure to solvent vapors can occur during thinning in solvent-based painting; during can filling in all solvent-based coatings; and during cleaning of process equipment with chemicals. Precautions include enclosure of process equipment, respiratory protection and confined-space procedures for cleaning processes.

Lens manufacturing and workplace areas require good lighting as well good ventilation to have optimum level of worker effectiveness. Good ventilation improves the air circulation. Inadequate ventilation can lead to lower productivity due to discomfort.













Figure 4-32 Ventilation Facilities at MAOI-2

# 5.0 DESCRIPTION OF THE CURRENT ENVIRONMENTAL AND SOCIAL CONDITIONS

In this chapter, the environmental profile, the existing environment baseline situation (primary data), and secondary information such as natural environment/ physical components, biological components and socio-economic status for the proposed project are described. For the purpose of characterization and quantification of various pollutants, visits were made, and detailed field studies were conducted in each category. Based on the measured values, the averages values have been taken as basis to characterize the typical pollution streams.

## 5.1 Methodology for Data Collection and Analysis

For preparation of this EMP report, there are two methodologies to collect the data to describe the current environmental and social conditions of the proposed project.

- (i) Primary Data Collection and Analysis
- (ii) Secondary Data Collection and Analysis

#### **5.1.1** Primary Data Collection and Analysis

The objective of the EMP baseline data collection is to present the general description of the environment as primary data collection. The methodology is designed to assess the baseline data of the environmental quality factors for "Myanmar Asia Optical International Company Limited" Project. Baseline environmental parameters are defined according to the guidelines, which apply to projects dedicated to the proposed project.

Environmental baseline data (primary data) such as air quality, odor nuisance and noise levels are measured by using instruments. For water quality and soil quality, samples are collected and analyzed at the GMES laboratory and ALARM Ecological laboratory. The results are mentioned in this Chapter. All of the results are attached in Appendices.

All necessary criteria such as site selections for sampling and analysis of ambient air quality, workplace air quality, light intensity, noise level, water quality and soil quality were identified by GMES.

#### **5.1.2** Secondary Data Collection and Analysis

Some data such as socioeconomic conditions, physical/biological environment and weather data are collected from the respective websites and reviewed by the EMP study team. The baseline data of the Mingaladon Township was collected from the Township Data published by General Administration Department (GAD) in 2020.

## **5.2** Environmental Baseline Situation (Primary Data)

Green Myanmar Environmental Services Company Limited had done measuring primary data or baseline environmental parameters such as ambient and indoor air quality, water quality and soil quality on February 2020. The materials and methods of instruments used for surveying the environmental baseline data and the results are mentioned in the following section.

The water samples, tube well water, wastewaters and soil samples were collected and analyzed the results in the laboratory.

#### 5.2.1 Air Quality

The objective of the air-quality monitoring program is to describe the baseline air quality conditions in the project area.

Dispersion of different air pollutants released into the atmosphere has significant impacts on the neighborhood air environment of a project and forms an important part of impact assessment studies.

The air quality status with respect to the project site will form the baseline information over which the predicted impacts due to the proposed project can be superimposed to find out the net (Final) impacts on air environment. Based on the final impacts of the air environment, a viable Environmental Management Plan (EMP) can be prepared.

The baseline status of the air quality can be assessed through scientifically designed air quality measuring network.

#### (i) Methods of Sampling and Analysis

The rate of air quality was recorded automatically every one minute for gases causing air pollution (Sulfur dioxide, nitrogen dioxide, carbon dioxide, carbon monoxide, hydrogen sulfide and particulate matters) to describe ambient air quality.

Sampling pump was adjusted to 2 liter/min.

#### (ii) Materials Used for Measuring

The ambient air quality parameters such as nitrogen oxide (NO<sub>2</sub>), sulfur dioxide (SO<sub>2</sub>), particulate matters (PM<sub>2.5</sub> & PM<sub>10</sub>), ammonia (NH<sub>3</sub>), carbon dioxide (CO<sub>2</sub>), carbon monoxide (CO), hydrogen sulfide (H<sub>2</sub>S), methane (CH<sub>4</sub>), wind speed, wind direction, relative humidity and temperature were measured by using **Haz-Scanner** which is a true environmental air station providing ambient air quality measurement of critical EPA criteria pollutants and air parameters.



**Aeroqual** is used to measure the particulate matters ( $PM_{2.5}$  and  $PM_{10}$ ) and **Mx-6** uses for oxygen, toxic and combustible gas, and volatile organic compounds (VOCs) of indoor air quality.







Aeroqual 500 Series

**KANE 900 Plus Combustion Analyzer** is used to measure the stack emission gas of boiler and generator. It can monitor the parameters such as Oxygen (O<sub>2</sub>), Carbon monoxide (CO), Carbon Dioxide (CO<sub>2</sub>), Sulfur Dioxide (SO<sub>2</sub>), Nitrogen Dioxide (NO<sub>2</sub>), differential pressure and temperature.



#### (iii) Selection of Sampling Location

Air quality measurement was taken at each project site. The sampling points were selected based on their locations relative to key community receptors, as well as their current or potential for impairments.

- 4) Ambient air quality at the project site was measured at only one sampling point
- 5) Workplace air quality was measured at fifteen points in MAOI-1 and eleven point in MAOI-2 and
- 6) Stack emission from diesel generators.

#### **5.2.1.1** Ambient Air Quality

Different analysis methods are used for different parameters of ambient air quality as shown in the following table.

Table 5-1 Parameters Measured for Ambient Air Quality

No.	Parameters	Analysis Methods
1.	Sulfur dioxide (SO <sub>2</sub> )	Electrochemical sensors
2.	Nitrogen dioxide (NO <sub>2</sub> )	Electrochemical sensors
3.	Carbon dioxide (CO <sub>2</sub> )	NDIR (optional sensor)
4.	Carbon monoxide (CO)	Electrochemical sensors
5.	Hydrogen Sulfide (H <sub>2</sub> S)	Electrochemical sensors
6.	Particulate matter 2.5 (PM <sub>2.5</sub> )	Infrared light scattering
7.	Particulate matter 10 (PM <sub>10</sub> )	Infrared light scattering

Ambient air quality at the project site was measured continuously at only one sampling point for 24 hours in each factory.

Sr. No.	Measuring Point	Geographic Information	Description	Remarks
1.	AMP	16° 56' 29.09" N	Near the entrance	See Figure 5-1
		96° 09' 23.85" E	gate at MAOI-2	

AMP= Ambient Air Quality Measuring Point

#### **Ambient Air Quality Measuring Results**

At the initial stage of the project, baseline air quality should be measured on the vicinity of the site to assess background levels of key pollutants and to differentiate between existing ambient conditions and project-related impacts in future. Air quality is defined by the concentration of dust and pollutant gas of the ambient air.

The ambient air measuring for factory-2 was conducted on February 14, 2020. The air quality measuring result for ambient air for MAOI-2 is described in **Table 5-3**.



Figure 5-1 Location of Measuring Ambient Air Quality at MAOI-2



Figure 5-2 Photos of Measuring Ambient Air Quality at MAOI-2

Table 5-3 Measuring Results of Ambient Air Quality Baseline Data (ASP) for Factory-2

No.	Parameters	Unit	Analys	sis Values Average	National Environmental (Emission) Quality Guidelines Guideline Average		Remarks
			Value	Period	Value	Period	
1.	Nitrogen	μg/m <sup>3</sup>	31.15	24 hours	200	1 hour	14/2/2020
	Dioxide						18:31-19:30
							(Peak Hour)
2.	Sulfur Dioxide	μg/m <sup>3</sup>	0	24 hours	20	24 hours	-
3.	Particulate Matter PM <sub>10</sub>	μg/m <sup>3</sup>	102.07	24 hours	50	24 hours	-
4.	Particulate Matter PM <sub>2.5</sub>	μg/m <sup>3</sup>	69.27	24 hours	25	24 hours	-
5.	Ammonia	ppm	0.22	24 hours	NG	-	-
6.	Carbon Dioxide	ppm	267.92	24 hours	NG	-	-
7.	Carbon Monoxide	ppm	0.39	24 hours	NG	-	-
8.	Hydrogen Sulfide	ppb	1.13	24 hours	NG	-	-
9.	Methane	ppm	0	24 hours	NG	-	-
10.	Relative Humidity	%	55.87	24 hours	NG	-	-
11.	Temperature	°C	29.20	24 hours	NG	-	-

\*NG- No Guideline

According to the **Table 5-3**, the particulate matters ( $PM_{10}$  and  $PM_{2.5}$ ) were much higher than the guideline values because vehicles and humans are moving around the air measuring station. The other parameters of the ambient air quality are within the National Environmental Quality (Emission) Guidelines.

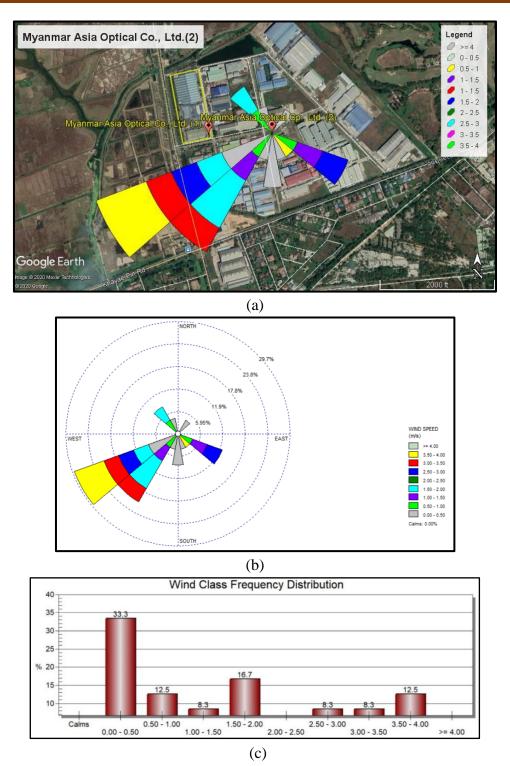


Figure 5-3 (a) Windrose Plot superimposed over the Project Site, (b) Windrose Plot, (c) Wind Class Frequency Distribution Chart for MAOI-2

## 5.2.1.2 Workplace (Indoor) Air Quality

Measurements to determine the environmental conditions of working environment of the factory were carried out for short-time interval samples (one hour for each sample measurement). The instrument was measured by two technicians.

Indoor air quality was measured at 11 locations on February 14, 2020 inside of the factory-2. The locations and results for MAOI-2 are seen in **Figure 5-4, Figure 5-5** and **Table 5-4.** 

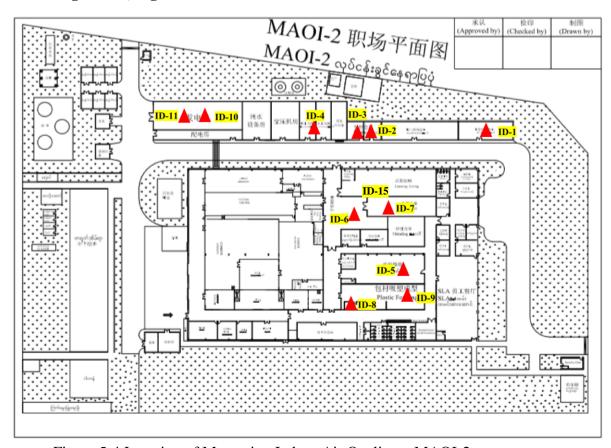


Figure 5-4 Location of Measuring Indoor Air Quality at MAOI-2



Figure 5-5 Some Photos of Measuring Indoor Air Quality at MAOI-2

Sr. Measuring			Parameter			
No.	Points	Description	VOC	$PM_{10}$	PM <sub>2.5</sub>	
110.	Points		(ppm)	$(\mu g/m^3)$	$(\mu g/m^3)$	
1.	ID-1	Chemical Storeroom	0.3	72	69	
2.	ID-2	Plastic Pallet Store	1.2	74	72	
3.	ID-3	Plastic Pallet Manufacturing	1.2	97	91	
4.	ID-4	Installation Department	0.2	86	83	
5.	ID-5	Injection Check	0.2	22	15	
6.	ID-6	Paper Box Store	0	67	60	
7.	ID-7	Warehouse	0	71	61	
8.	ID-8	Plastic Cleaning	2.1	24	21	
9.	ID-9	Plastic Making	1.2	17	15	
10.	ID-10	Generator Room Point-1	2	70	56	
11.	ID-11	Generator Room Point-2	2.4	73	53	

Table 5-4 Indoor Air Quality Measuring Results for MAOI-2

The workplace (indoor) air quality does not have the specific guidelines.

## 5.2.1.3 Generators' Stack Emission Measuring

There are three generators in MAOI-2. The measuring results of generators' stack emission in the factory-2 are described in **Table 5-5**.



Figure 5-6 Generators' Stack Emission Measuring at MAOI-2

Table 5-5 Generator Stack Emission Measuring Results for MAOI-2

				rement F	Results	
Sr. No.	Parameter	Unit	Generator-1	Generator-2	Generator-3	Small Combustion Facilities Emission Guidelines
1.	$O_2$	%	18.4	17.9	17.8	-
2.	CO	mg/Nm <sup>3</sup>	423	416	420	-

			Measu	rement R	Results	
Sr. No.	Parameter	Unit	Generator-1	Generator-2	Generator-3	Small Combustion Facilities Emission Guidelines
3.	CO <sub>2</sub>	%	2.25	2.31	2.12	-
4.	NO <sub>2</sub>	mg/Nm <sup>3</sup>	91	92	90	460
5.	SO <sub>2</sub>	mg/Nm <sup>3</sup>	2.6	2.1	1.9	2000

According to the measuring results, stack emission gases from generators are within the desirable limits.

#### 5.2.2 Noise Level

Noise is one of the most undesirable and unwanted by-products of our modern lifestyle. It may not seem as harmful as air and water pollutants but it affects human health and well-being and can contribute to deterioration of human well-being in general and can cause neurological disturbances and physiological damage to the hearing mechanism in particular. Therefore, it is necessary to measure both the quality as well as the quantity of noise in and around the site.

Parameter for noise level survey was determined according to Myanmar National Environmental Quality (Emission) Guidelines.

Noise surveys have been conducted at the project site in order to establish an acoustic baseline onto which potential impacts from the proposed project may be superimposed. Noise level measuring was also done at the same sampling points used for air quality monitoring.

Measurements to determine the environmental conditions of working environment of the factory were carried out for short-time interval samples (one hour for each sample measurement). Ambient noise level monitored continuously for 24 hours.

## **Material Used for Measuring**

**Digital Sound Level Meter** measures the environmental conditions of working environment of the factory carried out for short-time interval samples (one hour for each sample measurement). Ambient noise level measured continuously for 24 hours.




#### 5.2.2.1 Ambient Noise Levels

The ambient noise level was continuously measured for 24 hours. The ambient noise level measuring point are same with ambient air quality measuring points and the results are presented in **Table 5-6**.

Sr.	Measuring	Measuring	NEQG	Remarks						
No.	Points	Results (dBA)	(dBA)	I CIII I II						
1.	NMP	58.42	70	Day time						
				(07:00 a.m. ~ 10:00 p.m.)						
		58.47	70	Nighttime						
				(10:00 p.m.~ 07:00 a.m.)						

Table 5-6 Ambient Noise Level Measuring Results

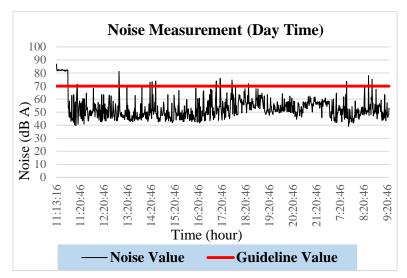

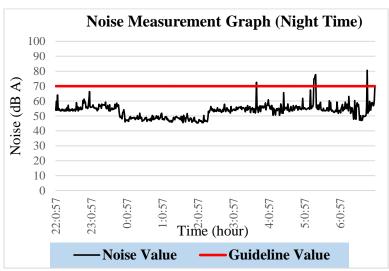


Figure 5-7 Ambient Noise Graph (24-hour) for Factory-2

As the project is located in industrial park, the observed values are compared with the guidelines for industrial area. The observed values of the ambient noise levels for daytime and nighttime are within the limit of Guidelines. Therefore, the human and the environment cannot be affected by the noise.

#### 5.2.2.2 Workplace (Indoor) Noise Levels

Measurements to determine the environmental conditions of working environment of the factory were carried out for short-time interval samples (one hour for each sample measurement). The workplace (indoor) noise level measuring points are same with workplace (indoor) air quality measuring points and the results are presented in **Table 5-7**.

Sr. No.	Measuring Points	Description	Noise Measuring Results (Duration = 1hr) (dB[A])	OHS Guidelines (8 hr) (dB[A])
1.	ID-1	Chemical Storeroom	60.6	90
2.	ID-2	Plastic Pallet Store	69.8	90
3.	ID-3	Plastic Pallet Manufacturing	87.5	90
4.	ID-4	Installation Department	73.5	90
5.	ID-5	Injection Check	76.5	90
6.	ID-6	Paper Box Store	53.6	90
7.	ID-7	Warehouse	47.3	90
8.	ID-8	Plastic Cleaning	87.2	90
9.	ID-9	Plastic Making	89.2	90
10.	ID-10	Generator Room Point-1	94.8	90
11.	ID-11	Generator Room Point-2	100.1	90

Table 5-7 Workplace (Indoor) Noise Level Measuring Results for Factory-2

According to the measuring results of average noise levels at workplace, the noise levels except generator rooms were within the acceptable conditions. The major noise pollution source inside the factory may be happened due to operation of generators and they are used in case of emergency only when the electricity goes out.

#### 5.2.3 Light Intensity

Light intensity is important for the workplace. Therefore, study team from Green Myanmar Environmental Services Co., Ltd. investigated light intensity at the six locations in the factory-I and one location in the factory-II by using Lux Meter in February 2020. Accurate and quantifiable measurement of light is essential in creating desired outcomes in practical day-to-day applications as well as unique applications. From measuring the amount of light in a workspace surface to ensuring emergency exits have proper illumination, light measurement and analysis is an important step in ensuring efficiency and safety. To perform these measurements, technicians often make use of lux meters, which are specialized devices that measure the intensity of light falling on a surface, or "lux."

From the workers' perspective, poor lighting at work can lead to eyestrain, fatigue, headaches, stress and accidents. On the other hand, too much light can also cause health and safety problems such as "glare" headaches and stress. Both can lead to mistakes at work, poor quality and low productivity. Various studies suggest that

good lighting at the workplace pays dividends in terms of improved productivity, and a reduction. Improvements in lighting do not necessarily mean that you need more lights and therefore use more electricity – it is often a case of making better use of existing lights; making sure that all lights are clean and in good condition; and those lights are positioned correctly for each task. It is also a case of making the best use of natural light. However, little attention appears to be paid on the nature of the work - it is as though all work in the factory requires the same degree of lighting.

## **Material Used for Measuring**

**Lux Meter** is used to measure the light intensity.



The following **Figure 5-8** shows the location points for measuring light intensity and the **Table 5-8** describes the light measurement results during the working hours.

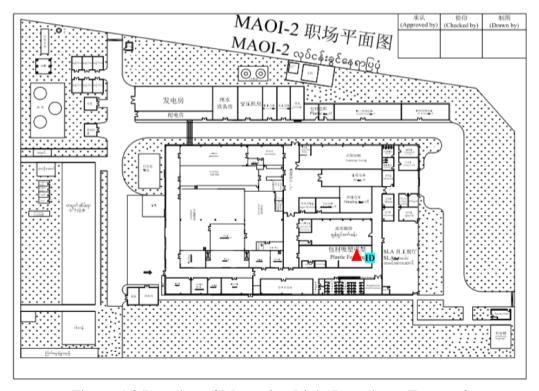


Figure 5-8 Location of Measuring Light Intensity at Factory-2



Figure 5-9 Light Measurement Activities

Table 5-8 Light Measurement Results

Sr. No.	Measuring Points	Location	Measure Values (Lux)	Guideline Values (Lux)
1.	ID	Plastic Making	215	150-300

According to the above table, all the light levels were within the limits.

#### 5.2.4 Water and Wastewater Quality

Selected water quality parameters of tube water and surface water have been studied for assessing the water environment and evaluating the anticipated impact of the proposed project.

The purpose of this study is to:

- Assess the water quality characteristics for critical parameters,
- Predict impact on water quality by this project and related activities and
- Suggest appropriate mitigation measures.

## **Selection of Sampling Locations**

Water quality was sampled from the water from water treatment plant and tube well water. Wastewater quality was sampled at the wastewater treatment plant and drainage waters. Water and Wastewater samples were collected nine samples at the project site and its surroundings on February 13 and 14, 2020 and carried out laboratory analysis by GMES laboratory and the ALARM ecological laboratory. The locations of water sampling points are as shown in **Table 5-9**.

Table 5-9 Locations of Water Sampling Points

Sr. No.	Sampling Points	Description Geographic Information		Remarks
1.	WSP-1	Tube Well Water	16° 56' 23.5" N 96° 09' 25.2" E	Water
2.	WSP-2	Inside Drain	16° 56' 25.26" N 96° 09' 24.07" E	Wastewater
3.	WSP-3	Treated Water	16° 56' 25.45" N	Water

Sr. No.	Sampling Points	Description	Geographic Information	Remarks
			96° 09' 24.32" E	
4.	WSP-4	Wastewater	16° 56' 25.08" N	Wastewater
		Treatment Outlet	96° 09' 25.33" E	
5.	WSP-5	Wastewater	16° 56' 25.19" N	Wastewater
		Treatment Inlet	96° 09' 25.6" E	

## 5.2.4.1 Water Quality

The analysis results of the physico-chemical parameters are presented in the **Table 5-10**. The analysis results were compared with Drinking Water Standards.



Figure 5-10 Location of Tube Well Water Sampling Points

Table 5-10 Result of Tube Well Water Quality (GMES Laboratory)

Sr. No.	Parameter	Unit	Analysis Value		Drinking Water Standard
140.			WSP-1	WSP-3	WHO (2011)
1.	Aluminum	mg/l	0.01	0.02	0.2
2.	Arsenic	μg/l	0.01	0	10
3.	Chloride	mg/l	160	8	250
4.	Copper	mg/l	ND	ND	2
5.	Cyanide	mg/l	ND	ND	0.07
6.	Manganese	mg/l	0.8	ND	0.4
7.	pН	-	6.01	5.72	6.5~8.5
8.	Sulfate	mg/l	ND	ND	250
9.	Total Alkalinity	mg/l	78	15	-

Sr. No.	Parameter		Analysi	s Value	Drinking Water Standard
140.			WSP-1	WSP-3	WHO (2011)
10.	Total Dissolved Solids	mg/l	590	10	600
11.	Total Hardness	mg/l	197	12	500
12.	Total Iron	mg/l	3	< 0.1	0.3
13.	Turbidity	NTU	10.7	8.86	5

ND - Not Detected

According to the lab result, even though the turbidity values decrease from 10.7 NTU to 8.86 NTU after treatment, turbidity from WSP-1 (Tube well water) and WSP-3 (Treated water) are still higher than the guidelines. Manganese and total iron from WSP-1 are higher than the guidelines but after treating they are within the guideline values. pH value from WSP-2 is a little lower than the guidelines and the other parameters are within the limits.

## **5.2.4.2** Wastewater Quality

The analysis results of the physico-chemical parameters are presented in **Table 5-11**. The analysis results were compared with National Emission Quality (Emission) Guidelines (2015).

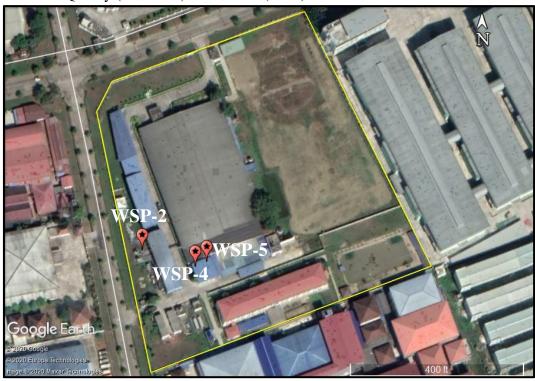


Figure 5-11 Location of Wastewater Sampling Points

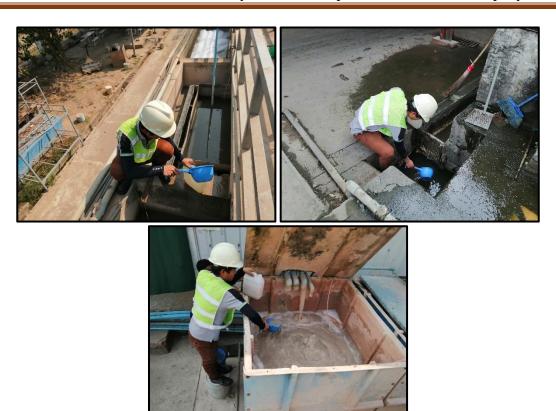


Figure 5-12 Recorded Photos of Wastewater Samplings

Table 5-11 Result of Wastewater Quality (GMES Laboratory)

Sr. No.	Parameter	Unit	Analysis Value WSP-2 WSP-4 WSP-5			National Environmental Quality (Emission) Guidelines (2015) General Application
1.	Arsenic	mg/l	0	0	0	0.1
2.	Chemical Oxygen Demand (COD)	mg/l	62	20	120	250
3.	Oil and Grease	mg/l	ND	ND	2	10
4.	pН	-	6.44	6.01	6.42	6~9
5.	Total Suspended Solids (TSS)	mg/l	2	20	1510	50

ND - Not Detected

According to the lab result, most of the parameter measured from wastewater samplings are within the guideline values except the value of TSS from WSP-5 (Wastewater Treatment Plant-Inlet). After this is treated in wastewater treatment plant, it can be seen that the TSS value decreases from 1510 mg/l to 20 mg/l. Therefore, the wastewater treatment system is effective.

#### 5.2.5 Soil Quality

To monitor the soil quality, the soil sample was collected in the project area.

# **Selection of Sampling Locations**

The soil sample of the factory was collected at one location inside the factory compound on February 14, 202.

Table 5-12 Locations of Soil Sampling Point (SSP)

Sr. No.	Sampling Points	Geographic Information	Description	Remarks
1.	SSP	16° 56' 23.3" N 96° 09' 25.1" E	Inside the factory-2	See <b>Figure 5-13</b>



Figure 5-13 Location of Soil Sampling Point in Factory-2



Figure 5-14 Photo of Taking Soil Sample inside the Factory Premise

#### **Analysis Results**

The collected soil samples were tested at GMES laboratory. The analysis results of the physico-chemical parameters are presented in the .

Table 5-13 Results of Soil Quality for Factory-2

Sr.	Parameter	Unit	Analysis Value
No.	rarameter	Unit	Construction Site Soil
1.	Aluminum	mg/kg soil	0.15
2.	Arsenic	mg/kg soil	0.025
3.	Chloride	g/kg soil	0.32
4.	Copper	mg/kg soil	ND
5.	Cyanide	mg/kg soil	ND
6.	Extractable Acidity	cmol/kg soil	7.8
7.	Manganese	mg/kg soil	0.026
8.	P-Alkalinity	mmol/l extract	0
9.	pН	-	5.27
10.	Total Alkalinity	mmol/l extract	0.57
11.	Total Iron	g/kg soil	0.015

The above results are noted as baseline data, and it will compare with the future results. Comparison will show better or worse.

## 5.3 Natural Environment/ Physical Components (Secondary Data)

Physical environment essentially illustrates baseline conditions of climate, topography, geology, soils and hydrology of the project area, where necessary, of proposed project regardless of an assessment study. These data are extracted from the regional facts about Yangon Region, Mingaladon Township prepared by the Administrative Department of Township (2020) and study area is an area of that township.

#### **5.3.1** Study Area (Mingaladon Township)

The proposed project (study area) which is located in Mingaladon Industrial Park (MIP), Mingaladon Township has mentioned in project description in detail. Mingaladon Township is located in the northern district of Yangon Region, Myanmar.

It occupies an area of 41.69 square miles. The location of the township is between north latitude 17° 3'2 and 17° 04' and between east longitude 96° 08' and 96°

The township shares border with

- Hlegu Township and North Okkalapa Township in the east,
- Shwepyitha Township and Insein Township in the west,
- Mayangone Township in the south, and
- Hmawbi Township and Hlegu Township in the north.

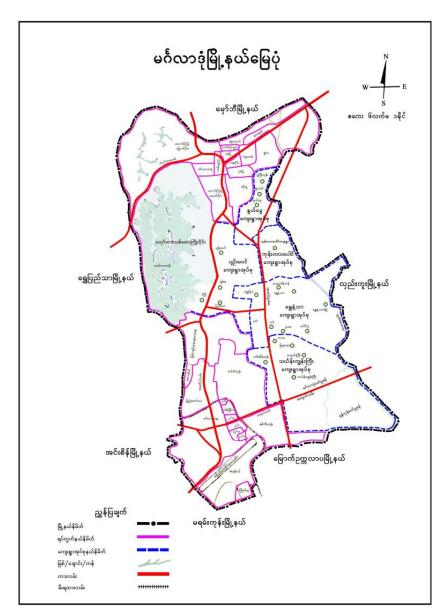


Figure 5-15 Map of Mingaladon Township

#### 5.3.2 Climate

The climate of the Mingaladon Township is a tropical monsoon climate. The highest temperature is 39 °C and lowest temperature is 15.5°C. The following table shows the yearly rainfall data and temperature of Mingaladon Township.

Table 5-14 Annual Rainfall Data and Temperature at Mingaladon Township

	Year	Rainfall		Temperature	
No.		Year Rainy Days	Total Rainfall (inches)	Summer (°C) Winter (°C	Winter (°C)
		Rainy Days	Total Raillan (menes)	Highest	Lowest
1.	2016	126	104	38	15.7
2.	2017	117	101.93	39	15.5
3.	2018	81	79.07	39	15.5
4.	2019	135	132.85	38	15.8
5.	2020	128	112.5	38	15.7

Source: www.gad.gov.mm

## 5.3.3 Topography

Ranged from south to north, Ngwe Yah Mountains is located in the western part of the Mingaladon Township. The Lawga Lake is situated at the western border near Shwepyitha Township and the rest areas are plains.

## 5.3.4 Geology

Yangon Region, excluding the Coco Islands in the Bay of Bengal, forms largely a flat terrain in the area of the Gulf of Mottama, except for low hills or ridges formed of upper Tertiary strata. Noticably high areas of the Region are the southern end of the Bago Yoma near Phaunggyi, and its farther southward extension of isolated low hills and ridges like those near Hlawga Lake, the Shwedagon pagoda Hill in Yangon City itself, and the ridge or rolling hills southeast of Thanlyin.

The mainland part of the Yangon Region is bordered on the west by the Ayeyawady Region, on the north and east by Bago Region and on the south by the Gulf of Mottama. The Coco islands, forming an outerarc ridge located in the Bay of Bengal, some 270 miles southwest of Yangon, is also part of the Yangon Region.

Being largely a flat alluvium-covered terrain with no notable economic mineral potential, Yangon Region has not attracted much of the attention of the geologists from the mineral prospect point of view. The geological succession of the Yangon Region is shown in **Table 5-15**.

Laterite for use as road material is now being quarried at Wanetchaung, between Hmawbi and Taikkyi, north of Yangon.

Age	Unit	
Quaternary	Younger Alluvium	
	Unconformity	
	Older Alluvium	
	Unconformity	
Upper Miocene-Pliocene	ne Irrawaddy Formation	
	Unconformity	
Miocene	Pegu Group (upper part only)	
	Unconformity	
Cretaceous-Eocene	Indoburman Flysch (in Coco islands only)	

Table 5-15 Geological Succession of the Yangon Region

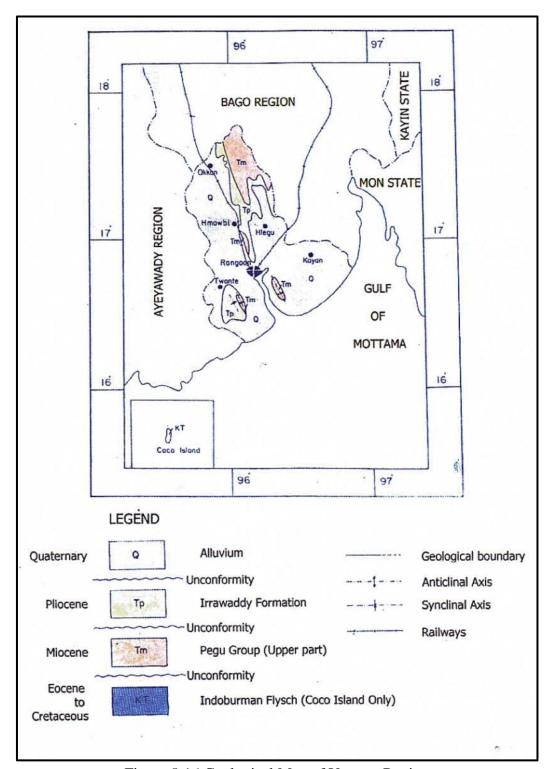


Figure 5-16 Geological Map of Yangon Region

#### 5.3.5 Soil

There are several soil types in Yangon Region:

- (1) meadow soils and meadow alluvial soils,
- (2) clay and clay swampy soils,
- (3) swampy soils,
- (4) lateritic soils,

- (5) yellow brown forest soils,
- (6) dune forest and beach sand,
- (7) mangrove forest soils,
- (8) saline swampy meadow and gray soils.

Of them, mostly found soil types in the project area are (1) meadow soils and meadow alluvial soils, and (2) lateritic soils. Soil map of Yangon is shown in **Figure** 5-17.

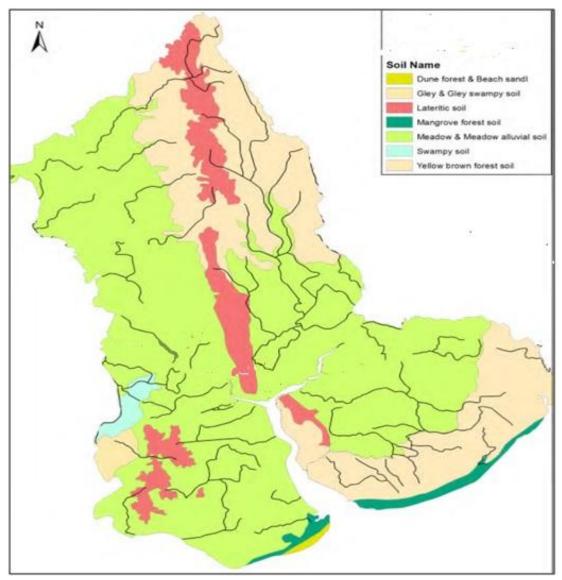


Figure 5-17 Soil Map of Yangon

## 5.3.6 Hydrology

Mingaladon Township has a few rivers and creeks flowing in that Barla Creek flows about 12 miles from north to south and about 8 miles from west to east. Its water depth is about 12 feet in rainy season and about 3 feet in summer and vessels/boats cannot travel in it.

# **5.4** Biological Components (Secondary Data)

The ecological information was received from the general administrative department of the Mingaladon Township.

## **5.4.1** Natural Vegetation (Flora)

The vegetation such as teak, pyinkadoe, thit-mar, nipa palm and mangroves are found in Mingaladon Township.

#### 5.4.2 Wildlife (Fauna)

There is no wildlife in Mingaladon Township.

# 5.5 Socio-Economic Components (Secondary Data)

## **5.5.1** Population and Communities

Mingaladon Township is composed of 27 quarters and 5 village tracts that is composed of 20 villages. There are 57,380 households and 263,798 populations. The female population is slightly higher than male according to the general administration department in 2020. In the township, most of the people are 94% Burmese and population by national ethnic group that are lived in Mingaladon Township describes in **Table 5-16.** 

Table 5-16 Population by National Ethnic Group

Sr.	Ethnicity	No. of	Percentage
No.	Ethincity	Persons	(%)
1.	Kachin	519	0.19
2.	Kayah	221	0.08
3.	Kayin	3,839	1.45
4.	Chin	2,352	0.89
5.	Mon	1,642	0.62
6.	Burmese	247,899	94
7.	Rakhine	3,126	1.18
8.	Shan	504	0.19
	Total	260,102	98.6

Table 5-17 Population by Foreigner

Sr. No.	Ethnic Race	No. of Persons	Percentage (%)
1.	Chinese	163	0.06
2.	Indian	3,515	0.33
3.	Pakistanis	1	0.01
4.	Bangladeshis	17	0.07
5.	Others	-	-
	Total	3,696	1.47

Table 5-18 Population by Sex

Sr. No.	Living Area	Male	Female	Total
1.	Living on town	69,820	80,077	149,897
2.	Living in country	50,435	63,466	113,901
	Total	120,255	143,543	263,798

#### 5.5.2 Religion

In the township, most of the people are 90.99% Buddhist and the other religious groups are shown in following table.

Table 5-19 Religious Groups of Ethnic in Mingaladon Township

Sr. No.	Religious Group	No. of Persons
1.	Buddhist	252,156
2.	Christian	4,339
3.	Hindu	3,23,
4.	Islam	4,071
5.	Others	-
	Total	263,798

#### **5.5.3** Education Attainment

According to the secondary data from General Administration Department, there are 9 basic education high schools, 3 sub high schools, 7 middle schools, 6 sub middle schools, 2 post primary schools, 25 primary schools, 24 pre-primary school and 22 monastery education schools.

#### 5.5.4 Connectivity

The selected project location has well connectivity and accessibility through road and air.

*Air*: Nearest airport is Yangon airport which is located around 5 km from.

*Road:* The project is easily approachable from No.3 Main Road.

#### 5.5.5 Health Facility

Mingaladon Township has 5 hospitals, 11 clinics and 5 rural health care centers.

## **5.5.6** Economy

Mingaladon Township is one of the central economic township in Yangon. It is also an industrial town that composed of Yangon Industrial Zone, Mingaladon Industrial Zone and Pyinmapin Industrial Zone. It has the best communication due to existing of Yangon-Pyi Road and No.3 Main Road.

#### **5.5.7** Land Use

The following **Table 5-20** describes the land use classification of Mingaladon Township.

Table 5-20 Land Use of Mingaladon Township

No.	Types of Land	Area (acres)
1.	Net Cultivation Area	4,285
	(i) Paddy land	2,839
	(ii) Farmland for crop	-
	(iii) Cultivated Island	-
	(iv) Orchard	1,446
	(v) Hillside	-
2.	Vacant Land Area	53
	Paddy land	2,596
	<ul><li>Farmland for crop</li></ul>	-
	Cultivated land	-
	Orchard	88
	Hillside	-
3.	Grazing Ground	-
4.	Industrial Land	54
5.	Urban Land	3,983.189
6.	Rural Land	3,431.11
7.	Others	7,526.301
8.	Reserved Forest and Protected Forest Area	7,175
9.	Wild forest	-
10.	Virgin Soil area	174
11.	Non-cultivated area	-
	Total	26,681.60

## 5.5.8 Workforce

There are 129,141 persons, who can be worked. Among them, 103,409 persons are employees and 25,232 persons are jobless. So, the percentage of jobless in Mingaladon Township is 19.53 %.

Table 5-21 Workforce of Mingaladon Township

Sr.	Types of Joh	No. of
No.	Types of Job	Persons
1.	Government Employee	40,732
2.	Services	6,100
3.	Agriculture	2,841
4.	Breed	153
5.	Trading	25,000
6.	Factory / Workshop Employee	7,300
7.	Fishering	15
7.	Random Worker	22,000
8.	Others	25,000
	Total	129,141

## 6.0 SUMMARY OF IMPACTS

The MAOI Factory-2 has been already constructed factory buildings so that there is no need to consider the construction phase impacts.

The MAOI products are produced from recyclable materials (such as glass and plastics). However, as other products, these products may create various kinds of environmental impacts at different stages of the manufacturing processes. There may be some positive and negative impacts in the surrounding environment of the project site due to the implementation of the project. A major source of the environmental impacts is the consumption of energy required to produce these products and water during the manufacturing process from raw materials to the final products.

#### **Anticipated Negative Impacts for Operation Phase**

All environmental effects are checked during an inspection of the site and found the following:

## **Environmental Effects**

Energy consumption electrical supply for process and auxiliary

machinery

electrical supply for lighting

Consumption of raw materials use of glass blanks, plastic materials

Chemicals purchase, storage, use, disposal

Emissions to atmosphere dust, fumes, VOC, NO<sub>x</sub>, SO<sub>x</sub>, CO, CO<sub>2</sub> from

heating installation

Water consumption process water for cleaning

domestic water

Discharges to water effluents from washing

effluents from cooling

Solid waste process waste (plastic pieces, glass pieces, etc.)

hazardous waste (e.g., machine oil, chemicals,

solvent, etc.)

packaging waste (plastics, cardboard, paper,

etc.)

Noise noise from machinery

Vibration vibrations from machinery

## 6.1 Impact on Ambient Air Quality

Process-related emissions, such as the glass particles, plastic dust and chemical fumes, the use of organic solvents or noise from process and mechanical equipment, can affect a factory in two ways:

- when they occur in the workplace, they present occupational health and safety concerns,
- when they are released outside, they become an environmental issue.

Air pollution is the most difficult type of pollution to sample, test, and quantify in an audit. Air emissions can be classified according to the nature of their sources:

#### **Point Sources**

Specific discharge points, such as stacks or vents that are intended to be the point of atmospheric release for emissions.

#### **Fugitive Sources**

Sources for more general atmospheric emissions occurred by evaporation, leaks, and spills.

The major sources for air quality deterioration for MAOI factory are gases from generators, and emissions from different mechanical and electric appliances; and operation activities such as grinding, cleaning, polishing, coating, etc. Fugitive or area sources of air pollutants include warehouses and spills. Common air pollutant emissions include VOCs from hazardous as well as non-hazardous chemicals. There are also several particulates or fumes emitted during optical lens production e.g., grinding, polishing, coating, etc.

## Raw Materials Store

Chemicals stored in storage room can emit volatile emissions, especially chemicals used for lens.

#### Spill

Spills can emit volatile pollutants for years and, therefore, should be cleaned up promptly. Spill residues should be disposed of according to proper protocol, which in some cases requires handling residues as hazardous waste.

#### Particulate and Fume

During lens production, there are several particulates or fumes that could be inhaled by operators causing health effects. Polycarbonate or plastic dust disperses into the air and collects within the grinding machine during manufacturing processes. Even in an enclosed machine, the operator may be exposed to plastic dust when cleaning the machine or switching to a different lens.

During the polishing step of lens production, polishing compounds and water combines with plastic dust forming a mist which could pose health effects. Both plastic dust and mist inhalation could be dangerous to the operator's health. Plastic dust contains microparticles of plastic which could become embedded deep in the lungs. The plastic microparticles could expose the lungs to the chemicals in the plastic or cause infections, coughing, lung disease, or lung function limitations. Sometimes the particles simply pass through the body without causing any effects. Both indoor and outdoor air contains plastic dust but the full effects of breathing plastic microparticles are not clear. Particularly industrial or commercial areas contain more

plastic microparticles concentrations in the air. Plastic dust exposure may also cause eye or skin irritation.

The metals or chemicals used for the coating step of lens production can cause respiratory irritation after inhalation and could be harmful to the lungs. Titanium oxide exposure has been shown to cause nausea, dyspnea, and irritation to the respiratory system.

# **6.2** Impact on Noise

The long-term effects of excessive noise exposure are physical as well as psychological.

Physical effects may include headaches, nausea, irritability, constriction of blood vessels, changes in the heart and respiratory rate, and increased muscle tension. Prolonged exposure to high noise levels may result in hearing damage.

Psychological effects may result from the stress and irritability associated with a change in sleeping patterns due to excessive noise.

Noise pollution is from generation of noise from vehicle movement and especially from the operation of heavy equipment such as compressor, generator, and other vibrating machines.

During the *operation phase*, machines' noise, transportation of raw materials and products and other production process activities, such as curve generation, grinding, polishing, etc.(See Flow diagram for each operation) of the factory, operation of heavy equipment such as compressors, diesel generators, pumps, motors and the maintenance workshop could be the major sources of noise pollution. But these are not much impact to the workers and surrounding environment because of using the engineering control of factory building design and using modernized machines. Estimated noise level outputs were obtained from equipment manufacturers and the impacts were assessed.

In the *decommissioning phase*, there will be some noises generated from heavy machineries running for dismantling activities. Activities likely to generate noise during this phase include cutting and demolition of structures, transportation of demolished materials could affect the noise level of the area. Though demolition works could lead to significant nuisance to the surrounding area, it is a short-term activity. Hence, it can be assumed that the impact of this phase is likely to be medium.

# 6.3 Light Pollution

During operation phase, the potential use of excess light could represent a minor environmental impact. The management and control measures identified in Chapter 6 of the report should minimize any impact

Process	Steps
Plastic Parts for Camera (Injection Molding Process)	Microscope Testing
Self-Focus Lens Array (SLA) (Glass Tube)	Optical Inspection
	Visual Inspection
	Appearance Inspection

## 6.4 Water Use

Access to high quality water for production operations is an essential factor in ensuring the quality of the finished and semi-finished lenses that the Company distributes. The MAOI factory-2 are located in industrial areas where access to water is provided by local authorities. They are dependent on these local authority managed utilities.

The factory uses considerable quantities of water for cleaning, lens machining, surfacing and rinsing operations. The net water consumption is the water used in the production processes, everyday site consumption and in sanitary networks.

#### **Daily Water Use**

Employee Housings Bathrooms (including toilets, faucets, showers) and other personal uses

Food Preparation Cooking, food preparation, dishwashing, and cleaning

These support operations exist in many other industry sectors, there are several proven Best Management Practices. Therefore, many of the water efficiency techniques and equipment from residential and business settings can be applied to minimize the water use.

#### **6.5** Soil Contamination

During the *operation phase*, impact on soil may be caused by accidental spills of chemicals used in lens processing, liquid wastes and diesel at storage area and emergency generators. Moreover, oil can be spilled at machines maintenance room while repairing the machines. But these are insignificant impact because the project proponent paved the ground of diesel storage area, generators room and entire compound. However, the occurrence will be low because of all activities in line with lens processing are mostly in-door. Hence, there is no significant impact to soil quality by operation activities.

During the *decommissioning phase*, soil can also be contaminated by activities related with decommissioning works and accidental spillage of oil used in decommissioning activities. The decommissioning phase could cause negative effect on the on-site soil quality as there is a potential for accidental spillage of fuel and lubricant from construction activities.

## **6.6** Solid Waste Discharge

MAOI's operations do not present any risks of discharges into the air, water and ground which could seriously affect the environment. However, MAOI-2 mainly uses plastic granules and SLA rods and chemical products in the manufacturing of plastic parts for camera and SLA. It also buys packaging products (cardboard, plastic casing, plastic film, etc.). These activities generate special waste, which must be handled and processed in a particular way.

The following "3**R**s" must be practiced.

- Reducing the volume of materials used in the various processes (manufacture, distribution),
- Reuse, and
- Recycle raw materials and packaging.

#### **Solid Waste Generation**

During the operation phase of the factory, the solid wastes will increase quantitatively.

- > Ordinary (non-hazardous) waste
- > Special (hazardous) waste

Manufacturing lenses produces some toxic byproducts such as styrene and butadiene which are released to the environment during production. Many other materials such as leftover glass and fluorite can be easily recycled for other uses with little waste.

#### **Packaging Materials**

Another major source of solid waste is packaging materials. These materials include cardboard boxes, wire, paper sacks, paperboard, plastic, or metal.

Reducing these wastes is largely a matter of establishing and enforcing improved purchasing specifications.

#### Drums

When purchasing fuel in drums, returnable containers should be specified, and the vendor should be required to accept unwashed drums for return. Eliminating the need to wash each drum before pickup can prevent a significant amount of wastewater.

## Bags

Bags often break, resulting in spillage of contents, and disposing of them is a nuisance. They cannot be stored near high traffic areas or wet locations. They also must be moved on skids, which frequently break, and handling bags requires a considerable amount of labor.

#### **Processing Wastes**

Plastic parts pieces, glass rods pieces and rejects from processing accounts for the solid waste generated.

Proper training can significantly reduce these wastes and could easily recover waste.

#### Miscellaneous

Other solid wastes include metal, trash, paper, and semisolid waste oils.

## 6.7 Energy Use

Energy and resource consumption are of major focus for this industry. To produce goods of the right quality and quantity, manufacturing processes are responsible for the major share of energy and water consumption.

During manufacture, machinery uses electricity to grind, cut, anneal, polish, align, and coat the crystal glass into the lens. These processes will contribute to the high energy

consumption for the factory. Assembly, on the other hand, is mostly done by hand or human mechanical energy resulting no energy use. Trimmed plastics parts are usually recycled. However, electricity is required to melt these plastic parts into reusable material.

#### **6.7.1** Electricity Consumption

Although electrical consumption is not directly concerned with impact on nature environmental and local communities, the resource utilization is an issue which should be seen from a sustainable development perspective, scarcity of water resources, combustion of fossil fuels, utilization of raw materials, emission of ozone depletion gases,  $CO_2$ , etc.

Moreover, high electricity demand can also consider negative impact on local uses because local electricity demand is higher and higher due to the normally increased in population and infrastructures.

The annual power requirement will be around 3,326,310 kWh for Factory-2.

#### **6.7.2** Diesel Consumption

The diesel generators are used for thermal energy utilization in the manufacturing process and for standby power requirement, and thus high diesel fuel consumption will take place. The annual diesel fuel requirement for generators in factory-2 is 24,921 gallons

# 7.0 DESCRIPTION OF PROPOSED MITIGATION MEASURES

This environmental management plan is conducted, because not only it is required by law, but also to measure the exact impacts of the activity on the environment and to propose what suitable mitigation measures that can be undertaken to decrease these impacts to the least.

The company recognizes that increased industrial activity and urbanization often generate increased levels of pollution to air, water, and land that may threaten people and environment at the local, regional, and global level; therefore, it intends to integrate the suitable technologies and practices to decrease such levels to the minimum. The company, through its all-work phases, will do its best to comply with the Myanmar Standards that deals with the Pollution Prevention and Abatement.

# 7.1 Mitigation Measures for Air Emissions and Ambient Air Quality

A wide variety of particulate and fume control solutions would prevent operators from exposure to plastic dust and chemical fumes from the coating step. The best suited solution would depend on the setup and size of the lens production facility.

Fume extractors and air purification systems use a fan to pull the hazard away from the operator and filter out the particulate and/or fume releasing the air back into the surrounding room. These systems do not require expensive external ductwork or makeup air.

- The cleanroom would require plastic dust and other particles to be minimized to ensure high quality production.
- Mist collector mounts directly on the machinery to filter out particulates and mist produced from the grinding and polishing process.
- Portable fume extractor can be used to capture particulate at the source for open grinder units used for lens production.
- The hanging ambient air cleaners provide extra protection to clean the workspace air for worker safety during lens production.
- For small polishing, grinding and most edging machines, the entire system can be contained within a ductless fume hood for particulate control.

# 7.2 Mitigation Measures for Noise

Despite the level of noise in working with most of the machinery in the factory are within the human accepted level (max. 60 dB, Decibel), some mitigation measures will be carried out in case of exceptional noise levels arise during any phase of work; for example: for example: running of diesel generators and machineries.

- Take steps to reduce noise directly at source
- > Encase or encapsulate noisy machines and equipment
- > Screen noisy areas with walls or ramparts
- > Use sound-proofing materials for the coating of ceilings or walls
- Try to influence noise by modifying physical data (e.g., speed)

- ➤ Locate noise-intensive machines together if possible
- > "Flag" noisy areas with signs and ensure that the workers wear ear plugs in these areas
- ➤ Wearing ears' anti-noise devices,
- > Keeping continuous checking, and
- > Sustainable maintenance for all machinery

# 7.3 Mitigation Measures for Light Pollution

- ➤ Work surfaces Ensure work surfaces are dull instead of shiny as reflected light reflects more off shiny surfaces which results in indirect glare.
- > Adjust light level to necessary.
- Install adjustable light so workers can adjust the light level.

#### 7.4 Water Use Reduction

Water is a key natural resource for the factories' activities, and it is a primary element for the manufacturing processes of optical lens cases and SLA. The water management is not only important to ensure the quality, continuity, and efficiency of the production operations, but it is also essential for the well-being of the employees and local communities where the factories are present.

Water use reduction is a high priority at MAOI as the factory uses considerable quantities of water for cleaning, lens machining, surfacing, and rinsing operations. To actively reduce its water use, the following actions should be taken:

- > water mapping: drafting of network maps for water and equipment using water for the main factories and mass production lines
- ➤ installation of several meters, including "smart" meters to allow more accurate, continuous measurement of water use by the various production lines, support equipment or sanitary water networks
- > drafting of a medium-term plan to reduce water use of each area

#### Water Use Best Management Practices

Best Management Practices are to-

- ➤ Develop and implement a preventive maintenance schedule for water leak identification and repair.
- ➤ Install water-efficient shower heads in dormitory.
- ➤ Retrofit old toilets in dormitories and factory bathrooms to improve water efficiency.
- ➤ Install low-flush toilets in dormitories and factory bathrooms to improve water efficiency.
- > Close the water tabs when not in use.

## 7.5 Soil Quality

The project proponent paved the whole ground of the factory. Since all the diesel storage area, generators room and chemical storage area are paved, soil contamination in

these areas is impossible. Contamination of soil is reduced by suitable management of oil and fuel storage and handling. In order to reduce the soil pollution, the project proponent must make sure of,

- Regular inspection of raw materials storage area for leakage
- ➤ Regular inspection of vehicles and emergency generators to prevent leakage of fuel and engine oils, and
- ➤ Refilling fuel with great care to prevent spillage

#### **7.6** Solid Waste Control

Waste produced by the optical industry includes glass, plastics and metals as well as water used during the manufacturing process. Solid waste management system should comply with the waste management regulations and laws in Myanmar. It is therefore important to build appropriate infrastructures, to dispose various wastes. Poor management of the collection and disposal of solid waste may lead to pollute of surface water or groundwater by leaching. This may cause significant problems if the waste contains toxic substances or if nearby water sources are used for water supplies. Where large quantities of dry waste are stored in hot climates, this may create a fire hazard. Related hazards include smoke pollution and fire threat to near-by buildings and people.

The company will establish proper management guidelines and ensure that all local requirements for on-site waste management are met, and; train all employees on the waste management procedures.

Recyclable solid wastes are sold to the suppliers, who have business license. Solid wastes which cannot be disposed are stored in temporary places separately and manages them by cooperating with Yangon City Development Committee (YCDC).

Common types of solid waste and pollution prevention strategies for the wastes are described below. Usually, the sources of each waste type are obvious upon inspection. A solid waste audit can identify waste sources that might be overlooked in everyday operations. After identifying the sources, factory can reduce or eliminate the associated wastes if they remain committed to achieving their pollution prevention goals.

Table 7-1 Procedure and	Descrip	tion of Waste	Management in MAOI
	Descrip	non or waste	

	Tuolo / TTToocuaro una Description of Waste Hamagement in 191701							
Sr. No.	Procedure	Cautions	Responsibilities					
1.	Waste Classification	<ul> <li>Paper scraps and tissues from office, workplace and public environment</li> <li>Plastic waste, stationery waste and rubber waste from office, and public environment</li> <li>Disposal of glass and plastics waste from manufacturing processes</li> <li>Toxic and harmful substances from various activities such as packaging of toxic and hazardous materials and materials left from these packages</li> </ul>	Each Department					
2.	Waste	■ Each department must segregate waste according	Each Department					

Sr. No.	Procedure	Cautions	Responsibilities
	Handling	<ul> <li>to the standard criteria</li> <li>In every department, clear landfills must be marked</li> <li>Depending on the volume of waste in each department, the waste must be transported to the appropriate storage unit. In the living environment, waste must be categorized and marked</li> </ul>	
3.	Temporary Storing	<ul> <li>There must be adequate fire extinguishers and clear markers for storing waste</li> <li>Incompatible waste must not be stored together</li> <li>Inspection must be taken to prevent contamination and leaks</li> </ul>	Each Department
4.	Waste Management and Disposal	<ul> <li>To dispose the waste of each department legally at the official antiques store through the General Affairs Department</li> <li>Wastes and hazardous wastes that have a significant impact on the environment, must be handled by a business license holder.</li> <li>If the license is not found, it should be stored temporarily.</li> </ul>	General Affairs Department
5.	Solving Abnormal Situation	If any abnormal situation occurs during the waste management process, it shall be solved with the regulations on environmental remediation and prevention.	Relevant Department

# 7.7 Mitigation Measures for Energy Consumption

## 7.7.1 Conservation of Electricity

There are several methods that can be employed to help conserve electricity and these include:

- Install energy and water meters to measure and control consumption throughout the facility.
- Implementing good housekeeping measures such as turning off equipment and lights when not in use.
- Use LED lights and/ or lower wattage lamps.
- Using more efficient equipment when replacing old equipment (such as motors and heating units).
- Installation of computerized controllers to better regulate motor output;
- Installation of timers and thermostats to control heating and cooling;
- Preventative maintenance of operational processes and pipes so as to improve efficiency and minimize losses.

- Raising awareness among technicians and maintenance teams and providing them with training; and
- the stoppage or standby conditions for equipment with the highest consumption;

## 7.7.2 Minimizing Diesel Fuel Consumption

Minimizing of diesel fuel consumption can also reduce the emission of gases, solid waste and as well as operation cost. Diesel fuel consumption can be reduced by the use of high efficiency diesel generator sets.

#### **Energy Use Best Management Practices**

Best Management Practices are to improve the energy efficiency of the manufacturing processes, different actions such as energy mapping for the main mass production sites and laboratories, installation of smart meters, benchmarking of energy models and medium-term energy reduction plans should be taken.

## 8.0 MONITORING PROGRAM

## 8.1 Environmental Monitoring Plan

Monitoring is an essential and an integral part of the implementation of the proposed environmental mitigation measures. Environmental monitoring generates useful information and improves the quality of implementation of mitigation measures.

Monitoring involves the observation, review and assessment of onsite activities to ensure adherence to regulatory standards and the recommendations made to reduce negative impacts. The plan must be comprehensive and address relevant issues, with a reporting component that will be made available to the regulatory agencies based on a mutually agreed frequency. It is recommended that a minimum yearly monitoring report be submitted to the authorities. The monitoring report will include at a minimum:

- Raw data collected
- Tables/graphs (where appropriate)
- Discussion of results with respect to the development in progress, highlighting parameters which exceed standards
- Recommendations

According to the section 108 of EIA Procedure, the project proponent will submit the Monitoring Report prescribed in the schedule of the Environmental Management Plan to the Ministry every (6) month or as may be prescribed by the Ministry.

**Table 8-1** shows the environmental monitoring plan for operation phase and decommissioning phase. Whereas the project proponent, MAOI is responsible during the operation phase and the demolition contractor is responsible during the closure phase for the implementation of environmental monitoring, summarization of the results and submission of the monitoring report to Environmental Conservation Department (ECD), Yangon Region under Ministry of Natural Resources and Environmental Consideration (MONREC) periodically.

Table 8-1 Environmental Monitoring Plan for the Operation and Decommissioning Phases

Sr. No.	Category	Monitoring Items	Monitoring Frequency	Monitoring Method	Location	Responsibilities	
Operation Phase							
1.	Air Quality	Ambient air quality	Once a Year	Measurement by equipment	Within the factory premise	EMT	
		Indoor air quality	Twice a Year	Measurement by equipment	Workplace (Chemical storeroom, plastics pallet store, plastics pallet manufacturing, installation dept., injection check, paper box store, warehouse, plastics cleaning and plastics making)	EMT	
		Generators' stack emission	Twice a Year	Measurement by equipment	All of the generators' stack	EMT	
		<ul> <li>Inspection of the machinery, equipment, and vehicles</li> <li>Inspection of the ventilation system</li> <li>Inspection of the toilets and sewage system</li> <li>Inspection of the waste disposal yards and waste bin</li> <li>Preparation of inspection record / report</li> </ul>	Monthly	Inspection and checking	Workplace	EMT and Supervisors	
2.	Noise Levels	Ambient noise level	Once a Year	Measurement of noise levels by equipment	Within the factory premise	EMT	
		Indoor noise level	Twice a Year	Measurement of	Workplace	EMT	

Sr. No.	Category	Monitoring Items	Monitoring Frequency	Monitoring Method	Location	Responsibilities
				noise levels by	(Chemical storeroom, plastics pallet	
				equipment	store, plastics pallet manufacturing,	
					installation dept., injection check, paper box store, warehouse, plastics	
					cleaning and plastics making)	
		■ Record the noise and	Twice a year	Inspection and	Workplace	EMT and
		vibration activities	or according to	checking		Supervisors
		<ul> <li>Inspection of the installation of sound</li> </ul>	instruction			
		barriers	and compliance			
		Regular supply of	compilance			
		sufficient quantity of PPE				
3.	Light Intensity	Light intensity	Twice a Year	Measurement by equipment	Workplace	EMT
4.	Water and	Tube well water quality	Once a Year	Laboratory Analysis	Tube well water and treated water	EMT
	Wastewater	and the second s	3 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3			
	Quality	Effluent water quality	Once a Year	Laboratory Analysis	Inside drain, wastewater treatment	EMT
					outlet and wastewater treatment	
		Y	36 11	Y	inlet	T) (T) 1
		<ul> <li>Inspection of the stormwater flowing</li> </ul>	Monthly	Inspection and checking	Workplace and factory premises	EMT and Supervisors
		<ul><li>Inspection and</li></ul>		Checking		Supervisors
		maintenance of the				
		screen to collect the solid				
		waste				
		■ Inspection of the				
		condition of concrete floor				

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		<ul> <li>Inspection of the leakage and spillage of oil, lubricant and fuel</li> <li>Preparation of inspection record / report</li> </ul>				
5.	Soil Quality	Soil	Once a Year	Laboratory Analysis	Within the factory premise	EMT
6.	Waste Disposal	<ul> <li>Separate bins for different kinds of wastes</li> <li>Record the solid waste amount</li> <li>Inspect the waste disposal system</li> <li>Inspect storage system of waste</li> </ul>	Monthly	Inspection and checking	Factory compounds and surrounding environment	EMT
7.	Hazardous Chemical and Materials	<ul> <li>Record the storage amount of hazardous waste</li> <li>Inspect the disposal system</li> <li>Inspect the hazardous wastes storage area</li> </ul>	Monthly	Inspection and checking	Hazardous waste storage area	EMT
8.	Water Consumption	<ul> <li>Record the amount of water usage</li> </ul>	Daily/ Monthly	Records by water meter	Drinking water, process water and domestic water use	EMT
9.	Electricity Consumption	■ Record electricity usage	Daily/ Monthly	Recording	electric meter	EMT
10.	Fuel Consumption	<ul> <li>Record diesel consumption</li> </ul>	Daily/ Monthly	Recording	Generator	EMT

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
11.	Occupational Health and Safety	<ul> <li>Record the OHS</li> <li>Record the worker complains and conflict</li> <li>Inspect the PPE and record the details of PPE delivery</li> <li>Supply the first aid kits</li> <li>Inspect the worker rest camps and drinking water supplying situation</li> <li>Inspect the toilets and sewage system</li> </ul>	Monthly	Inspection and checking	Factory compounds	HSE Officer and EMT
		<ul> <li>Regular medical checkup for employee at sensitive area</li> <li>Medical check-up record of each employee</li> <li>Give training for OHS and first aid</li> </ul>	Once a year	Inspection and checking	Factory compounds	HSE Officer and EMT
12.	Social Consideration	<ul><li>CSR activities</li><li>Worker ware-fare activities</li></ul>	Yearly	Records	Nearest local area and factory area	HR Manager and EMT
13.	Emergency Risks	<ul> <li>Inspect the firefighting equipment</li> <li>Record the training situation and trained person</li> <li>Record the hazardous</li> </ul>	Twice a year or if necessary	Inspection and checking	Factory compounds	Emergency Response Team and EMT

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
		materials handling and				
		management				
		<ul><li>Inspect and record the</li></ul>				
		emergency response				
		activities				
		<ul><li>Inspect and record the</li></ul>				
		situation of drain inside				
		the project area				
		<ul><li>Record the emergency</li></ul>				
		response plan				
		<ul><li>Record the inspection</li></ul>				
		information				
			Decomm	issioning Phase		
1.	Air Quality	Ambient air quality	Once	Measurement by	A suitable point on demolition site	Demolition
				equipment		Contractor
		Dust emission	Daily	Visual inspection	Demolition site	Demolition
						Contractor
		Exhaust gases	Weekly	Visual inspection	Demolition site	Demolition
						Contractor
		Repair and maintenance of	As necessary	Record of repair and	Demolition site	Demolition
		vehicles, machineries and		maintenance		Contractor
		equipment				
2.	Noise Levels	Ambient noise level	Once	Measurement of	Demolition site	Demolition
				noise levels by		Contractor
				equipment		
		Repair and maintenance of	As necessary	Record of repair and	Demolition site	Demolition
		vehicles, machineries and		maintenance		Contractor
		equipment				

Sr. No.	Category	<b>Monitoring Items</b>	Monitoring Frequency	Monitoring Method	Location	Responsibilities
3.	Water and	Water quality for drinking	Once	Laboratory Analysis	Demolition site	Demolition
	Wastewater	and domestic use				Contractor
	Quality					
		Effluent water quality	Once	Laboratory Analysis	Effluent pit before discharge	Demolition
						Contractor
		Operation of temporary	Weekly	Visual inspection	Demolition site	Demolition
		water ponds				Contractor
		Domestic wastewater	Monthly	Record of	Installation areas of temporary	Demolition
		collection		wastewater	septic tank	Contractor
				collection receipts		
4.	Soil Quality	Soil	Once	Laboratory Analysis	Demolition site	Demolition
						Contractor

# 8.2 Estimated Cost for Environmental Monitoring

The budget plans for environmental management and monitoring that will be implemented by the project proponent are estimated and proposed in the following sections.

MAOI will be responsible to implement necessary environmental mitigation measures and the expenses for environmental management not only the operation phase but also the decommissioning phase in accordance with EMP study.

The following tables are not definitive and should be treated as preliminary and representative.

Table 8-2 Estimated Cost for the Basic Environmental Monitoring during the Operation and Decommissioning Phases

Decommissioning i nases						
Sr. No.	Environmental Issues	Monitoring Items	Number of Location (a)	Recommended Monitoring Frequency (Time/year) (b)	Rate (MMK/ Measurement) (c)	Total Annual Amount (MMK) (a x b x c)
			Operation	Phase		
1.	Air Quality	Ambient air	1	1	800,000	800,000
		quality				
		Workplace	11	2	200,000	4,400,000
		(Indoor) air				
		quality				
		Stack	3	2	200,000	1,200,000
		emission of				
		generator				
2.	Noise and	Ambient	1	1	250,000	250,000
	Vibration	noise levels				
		Workplace	11	2	50,000	1,100,000
		noise levels				
3.	Light	Light at	1	2	300,000	600,000
		workplace				
4.	Water Quality	Tube well	2	1	250,000	500,000
		water				
		Effluent	3	1	350,000	1,050,000
		water				
		quality				
5.	Soil Quality	Soil	1	1	600,000	600,000
6.	Waste Manageme				Lump sum	150,000
7.	Hazardous Waste Management				Lump sum	100,000
8.	Energy and Resource Consumption (Water, diesel and Lump sum 2,500,000				2,500,000	
	electricity)					. =0
9.						1,500,000
	emergency safety measures, fire safety measures and so					
1.0	on)					4.500.000
10.	Public Health and Occupational Safety Lump sum 1,500,000					

Sr. No.	Environmental Issues	Monitoring Items	Number of Location (a)	Recommended Monitoring Frequency (Time/year) (b)	Rate (MMK/ Measurement) (c)	Total Annual Amount (MMK) (a x b x c)
					<b>Operation Phase</b>	16,250,000
	Decommissioning Phase					
1.	Air Quality	Ambient air	1	1	800,000	800,000
		quality				
2.	Noise and	Noise	4	1	250,000	1,000,000
	Vibration	Vibration	1	1	500,000	500,000
3.	Water Quality	Drinking	2	1	250,000	500,000
		water and				
		domestic-				
		use water				
		Effluent	1	1	350,000	350,000
		water				
		quality				
4.	Soil Quality	-	1	1	300,000	300,000
			Tota	Costs for Decom	missioning Phase	3,450,000

# 8.3 Environmental Management Team

The project proponent pleased to offer all membership in Myanmar Asia Optical International (MAOI) Company Limited as Environmental Management Committee and appointment was commenced on 2021-01-10.

This team undertakes the activities of monitoring the stack emissions, ambient air quality, indoor air quality, noise levels, water quality, etc. either departmentally or by appointing external agencies wherever necessary. Regular monitoring of environmental parameters are being carried out to find any deterioration in environmental quality and also to take corrective steps, if required, through respective internal departments. The Environmental Management Team also collects data about health of workers, Green Belt Development etc.

The EMT shall also be responsible for monitoring of the plant safety and safety related systems which include:

- > Checking of safety related operating conditions
- Visual inspection of safety equipment.
- ➤ Preparation of a maintenance plan and documentation of maintenance work specifying different maintenance intervals and the type of work to be performed.

The organization of the EMT are as the following figure and the main duty of the affairs staff is

- > Implementation of the plan
- > Implementation of the plan's schedule assurance
- > Regular report promotion status and
- > Communication of contact matter

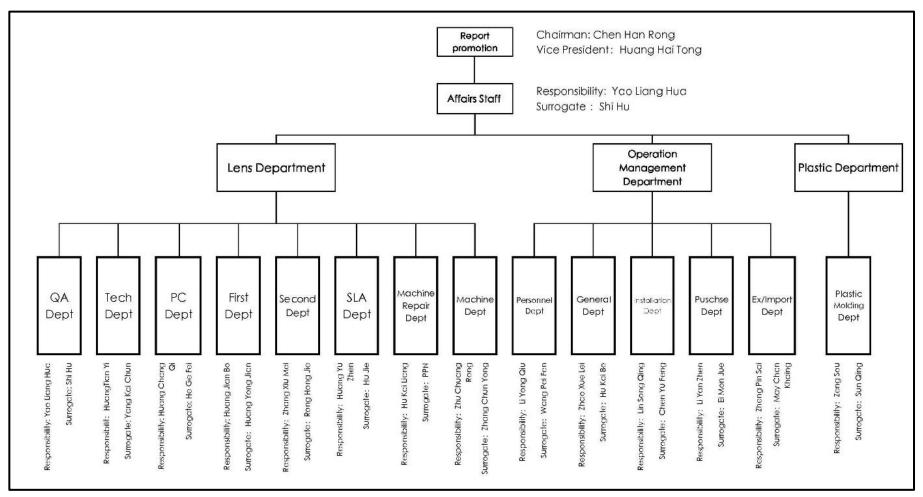


Figure 8-1 Organization Chart of the Environmental Management Team

# 8.4 Chemical Management Plan

# 8.4.1 Registration, Registry of Chemical / Hazardous Substances and SDS

All hazardous chemicals, which are produced, stored, used or handled, need registration with local agencies. MAOI will ensure permit or license to obtain the permit of procurement, storage and use. MAOI will maintain a daily registry of inventory of the chemical / hazardous substances for production.

All hazardous substances must have safety data sheet (SDS). A master-list of SDS for all hazardous substances that are produced, stored, used or handled are registered by individual department and submitted to Administrative Officer for compilation.

Respective work area will maintain a file containing all SDS of the hazardous substances used in the area. SDS can point identification of substance and the company, hazard identification, composition of ingredients, first aid measures, fire-fighting measures, accidental release measures, handling and storage, exposure controls and personal protection, physical and chemical properties, stability and reactivity, toxicological information, ecological information, disposal considerations, transportation information, regulatory information and other information

There are 8 chemicals registered for operation and SDSs are attached in **Appendix 10**. The chemicals used in MAOI factory are listed in **Table 4-9** and **Table 4-10** of section **4.7.2**.

# 8.4.2 Labeling and Warning Signs

#### Labeling

- ❖ All packed containers containing hazardous chemicals shall be labeled in accordance with GHS (Globally Harmonized System).
- ❖ The label will indicate the identity of the chemical, its hazards and the precautions to take.
- ❖ Original labels may only be removed or modified in that container which is no longer to be used for holding that hazardous substance and has been emptied and cleaned to remove any residual substance

# **Warning Signs**

According to WSH (Workplace Safety and Health) Law all employees who are required to handle the hazardous substances must be aware of the hazards and the precautionary measures.

Warning signs or notices specifying the nature of the danger of the hazardous substances will be prominently displayed in areas where such substances are used or handled.

#### 8.4.3 Handling

- ❖ Avoid aerosol formation
- ❖ Wear suitable protective clothing and eye/face protection.

- ❖ Avoid contact with the skin, eyes and clothing.
- Keep container tightly sealed.
- Ensure that there is no crystallized product in the container before use.
- ❖ Processing machines must be fitted with local exhaust ventilation.

Protection against fire and explosion:

- \* Risk of self-ignition when a large surface area is produced due to fine dispersion.
- Soiled textiles / cleaning rags / adsorbents and Silica are capable of self-ignition and should be wetted with water and must be disposed of in a safe manner.
- ❖ Take precautionary measures against static discharges.

Avoid all sources of ignition:

Heat, sparks, open flame. If exposed to fire, keep containers cool by spraying with water.

# 8.4.4 Transportation

Whenever hazardous substances are transported within or outside MAOI, precautionary measures should be taken to ensure that the potential risks are communicated to persons who will come into contact with the hazardous substances during transportation. This can be accomplished through

- Marking and labeling of packages or containers to indicate the hazards of the consignment.
- ❖ The relevant information can be included in the transport documents, and by placing or sticking placards on the transport units i.e., vehicles and containers. These labels should conform to the Prevention of Hazard from Chemical and Related Substances Rules.
- ❖ The vehicles should be equipped with appropriate firefighting appliances and
- ❖ Drivers should be trained in the safe transport of Hazardous Substance as well as in dealing with emergency situations.

Loading, unloading and transfer operations are prone to accidents, and should be managed properly.

- ❖ Safe work procedures (SWP) should also be established and carried out in order to avoid unnecessary risks.
- ❖ Control measures such as understanding of SWP and conducting RA (Risk Assessment) should be implemented to reduce the risks.

#### 8.4.5 Storage

- ❖ All hazardous substances will be stored separately.
- Installed fire extinguisher.
- ❖ Flammable substances must be stored in cool condition and away from the direct sunlight.
- ❖ All hazardous substances inventory must be maintained to-date. (e.g., Daily Production Report and Chemical inventory list).

❖ Design of storage facilities are based on statutory requirements, safety data or other technical information (International standards should be followed where applicable).



Figure 8-2 Chemical Storage Area

# 8.4.6 Identification of Hazardous Chemicals

Most of the chemicals used in this factory are solvents and pigments. Some of the pigments and solvents used in the solvent-based paints are hazardous.

Table 8-3 Identification of Hazardous Chemicals

No	Commodity Name	Commodity Name Physical		Hazardous Identification		
110	Commounty Name	Appearance	Non-Hazardous	Hazardous	Used	
1.	Ethyl Alcohol				Injection	

No	Commodity Nome	Physical	Hazardous Ide	entification	Type of Work
110	Commodity Name	Appearance	Non-Hazardous	Hazardous	Used
2.	Acetone	Transparent	-	~	Mold room for
		liquid			mold
					maintenance
3.	Rare Earth Polishing	White or Light	-	~	SLA-Polishing
	Powder	Pink Powder			process
4.	Lapping Emery	Light yellow	<b>✓</b>	-	SLA-Grinding
	(SiC, silicon carbide	transparent			process
	abrasive powder)	liquid			
5.	Optical Adhesive A-	Powder	-	~	SLA-Gluing
	01				process
6.	Cutting Fluid	Transparent	-	~	SLA-Slicing
		liquid			process
7.	G 17 Adhesive	Light color	-	~	SLA-Polishing
		transparent			process
		liquid			
8.	Metal Polish	Viscous liquid	-	~	SLA-Primary
					forming process
					(to polish the
					Groove fixation)

## 8.4.7 Chemicals Risk Control Measure

It is imperative to conduct risk analysis for all the projects where hazardous materials, either as raw material or the product are handled. In regard to chemicals, a hazard is a set of properties that are associated with the chemical that may cause adverse effects to organisms or the environment.

Hazardous chemicals pose many risks upon the people, property and environment of the workplace and it is very important that a methodical risk management process is in place to mitigate the risks associated with hazardous chemicals. The risk assessment is required for use and storage of large quantities of hazardous substances to establish health and safety zones to prevent knock-on effects of neighboring hazardous installations and protect the public from fire, explosion, toxic fumes dispersal hazards, detrimental effects on health and chemical contamination.

## **Administrative Control**

No hazardous substances or dangerous goods is authorized to be purchased or used.

- ➤ The proposed uses and storage of each substance has been risk assessed and approved in accordance with national rules and regulation.
- ➤ The risk assessment is documented and its recommendations for management are implemented through incorporation into standard operation procedures and other internal documents, where appropriate.

- ➤ Chemicals and fuels are reassessed based on the certain conditions and/ or changes.
- ➤ Control measures identified by the risk assessments are to be implemented.
- ➤ Where a significant risk is identified, the control measures must be implemented prior to use of the chemicals.
- Labeling is an important control measure for the transportation, storage, handling and disposing of chemicals. All containers of chemicals, products and waste materials are to be labeled correctly.

Furthermore, dangerous goods cabinets are to be kept in good condition and appropriately signed. The following requirements must be met or exceeded.

- > Storage base is impermeable
- > Storage is away from stormwater drains, pits and surface waters
- > Storage is undercover, wherever practicable and
- Equipment is in place to allow immediate recovery of spilt material.
- ➤ Installation of adequate firefighting system.
- > Spill kits are to be regularly checked to ensure they are restocked in a timely manner. The type of spill kits prescribed is to be appropriate for the chemicals, fuels and classes of dangerous goods stored at the location.

# **Engineering Control**

MAOI has installed the pollution control facilities. There are:

- (1) Wastewater treatment plant for the industrial wastewater quality control
- (2) Septic tanks for the domestic wastewater quality control
- (3) Fire extinguishers, hose reel, hydrant, alarm system, smoke detector and automatic firefighting pump for the fire protection.

#### Safe Work Procedures (SWP) and Personal Protective Equipment (PPE)

The Head of Sections and Supervisors (Person In-charge) are responsible to develop and maintain the SWP, but employees executing the works are to report for any work deficiency in the SWP for continuous improvement purposes. It includes the safety and health precautions, which are to be taken during the course of work, and the use of personal protective appliances.

The primary objective of using PPE is to protect the employees against the entry of hazardous chemicals into the body through inhalation or through skin contact. It is supplementary to engineering control measures. PPE should be selected appropriate to the hazardous nature of the chemical operation, and should be properly used and maintained. Inappropriate PPE, or PPE improperly used or maintained may do more harm than good.

MAOI's Management are responsible for ensuring their employees are provided with appropriate PPE and received appropriate training in the use, maintenance and replacement of the PPE.

### 8.4.8 Training

All employees and contractors in MAOI undergo an internal orientation training (ref. General safety, Environmental & Security Rules for Staff and Contractors) that includes a brief explanation of the plant process, information on the hazardous substances manufactured/used in MAOI and OSH requirements in MAOI. All employees who work in the field must attend the available equivalent course of Safety Orientation Course (SOC) or Safety Supervisor Course (SSC) and undergo an OJT with mentoring before being assigned to work with such chemicals. SDS is used as the basis for employees and contractors who handle hazardous substances or may be potentially affected by it and the information includes the hazards, procedures for safe handling, minimizing exposure and first aid.

# 8.4.9 Waste Disposal

- ❖ All Managers/Department Head/Supervisors shall be responsible for ensuring that all hazardous substances are disposed in an appropriate manner as required by regulations and the SDS.
- ❖ Improper handling of waste may cause pollution an endanger the safety and health of the workers.
- ❖ Work practices and procedures shall comply with local regulations or EMP report for the disposal of solid, liquid and/or gas wastes.
- ❖ Documentation must be maintained for waste collection, storage, recycling / disposal and frequency in each of the waste categories identified, if available.
- ❖ All employees will be provided with suitable PPE that will adequately control exposure to injury or harm from waste material.

The hazardous waste that generate from operation shall be governed by a hazardous waste management system. This includes:

- proper labeling of waste according to the national codes
- proper waste
- storage and treatment facilities
- proper waste transport
- disposal facilities by licensed or toxic waste collectors, and
- proper emergency action plan to deal with any accidental release of hazardous waste.

# **8.4.10** Emergency Preparedness

- ❖ For emergency environmental incidents, the Emergency Preparedness plan is to be followed.
- Spills, leaks or inadvertent resulting in soil, surface or groundwater contamination shall be immediately reported, managed and /or remediated in accordance with the SDS.
- ❖ Location and installation of storage and handling systems should be designed for safety (e.g. racking systems, tanks).
- ❖ Incompatible substances should be stored separately to prevent reactive chemicals interacting.

- ❖ Potential ignition sources must be away from flammable substances.
- ❖ Appropriate safety signage and placards must be displayed.
- Spill containment and clean up systems must be ready
- ❖ Emergency plans must be in place to deal with an incident involving the hazardous chemicals
- ❖ The appropriate personal protective equipment (PPE) must be provided and stored correctly (e.g. respirators sealed).
- ❖ Fire-fighting equipment must be easily accessible.





Figure 8-3 Systematically Storage of Chemicals

# 8.4.11 Emergency Response Plan (ERP) for Chemical Leakage / Spillage or Fire Hazards in MAOI

The ERP is focused on emergency preparedness and action taken in the event of chemical leakage / spillage or fire outbreak in MAOI. In order to minimize injury to personal, damage to property and environment impact, the ERP will be reviewed annually or upon any major changes in practice and facility and updated as required.

# 9.0 EMERGENCY PLAN

A clearly defined emergency response and preparedness policy will be developed and brought to the proposed project. An effective response is seen as the direct outcome of quality environmental management and comprehensive training and awareness of safety procedures.

The principal objective of emergency preparedness is to localize accidents, and if possible contain and minimize them. The proposed development will have an Emergency Response Plan, which will provide guidelines to allow for flexible response to a range of potential circumstances. The plan would include:

- Chain of command and coordination procedures
- Lines of communication
- Means of obtaining needed information and assistance

Copies of the plan or relevant portions will be strategically located at vantage points across the property to allow for immediate access. All employees will receive safety and emergency response training as a part of the initiation process.

# 9.1 Emergency Management Team

The emergency management includes measures that provide for the safety of personnel, property and facilities. Elements of emergency management plan are fire hazard, natural hazard, food toxic, contagion, chemical hazard, transportation accident, earthquake, tsunami, and emergency accident.

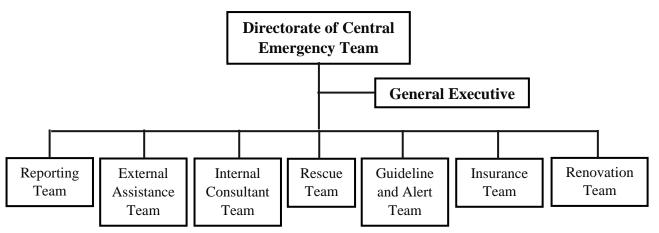


Figure 9-1 Organization Chart of Emergency Management Team

Table 9-1 Duties of the Emergency Management Team

Sr. No.	Position	Duties/Responsibilities	
1.	Directorate of Central	To decide the emergency case	
	Emergency Team	> To do the emergency prevention	
		To solve the problems of employees and to safe the property	
		and loss	
2.	Reporting Team	> To report the central department first and then the emergency	

Sr. No.	Position	Duties/Responsibilities			
		conditions are distributed to each department if any emergency case			
3.	External Assistance Team	To contact the government organizations and fight the emergency case corporation with them if unsolved problems by the MAOI' emergency department			
4.	Internal Consultant Team	> To collect the information of emergency case			
5.	Rescue Team	<ul> <li>To operate the emergency case, the difficult case and extension are solved by using the technology</li> <li>To safe the employees and property</li> </ul>			
6.	Guideline and Alert Team	➤ To leave from the emergency exit, to corporate the rescue team and at the same time, normal cases are protected carefully			
7.	Insurance Team	➤ To provide for insurance, transportation, communication and health care materials, regular insurance service for employees and even in emergency case, the regular operation for production and living			
8.	Renovation Team	<ul> <li>To confirm the emergency case</li> <li>To operate to the original condition in time,</li> <li>To perform the normal production systematically</li> <li>To adjudicate the emergency cases</li> <li>To brief the experience and lesson</li> <li>To analyze the after-effect and employees are trained and demonstrated for the emergency protection plan</li> </ul>			

# 9.2 Emergency Response Plan

Health, safety and environmental (HSE) coordinator is responsible for the emergency response plan for the Occupational Health, Safety and Environmental program (OHSE) part. The emergency respond procedure should be listed as follows:

- ❖ Assemble the employees for the rescue operation and at the same time, help the relevant external departments and government organization.
- \* Record the emergency information to take the emergency rescue operation.
- Guide the right ways not to loss employees and property by the Human Resource department and supervisors.
- ❖ Negotiate the HR department and financial department to provide the insurance.
- ❖ Use the automatic alarm system to detect the emergency cases.
- ❖ Train the employees to protect and safe from the emergency cases.

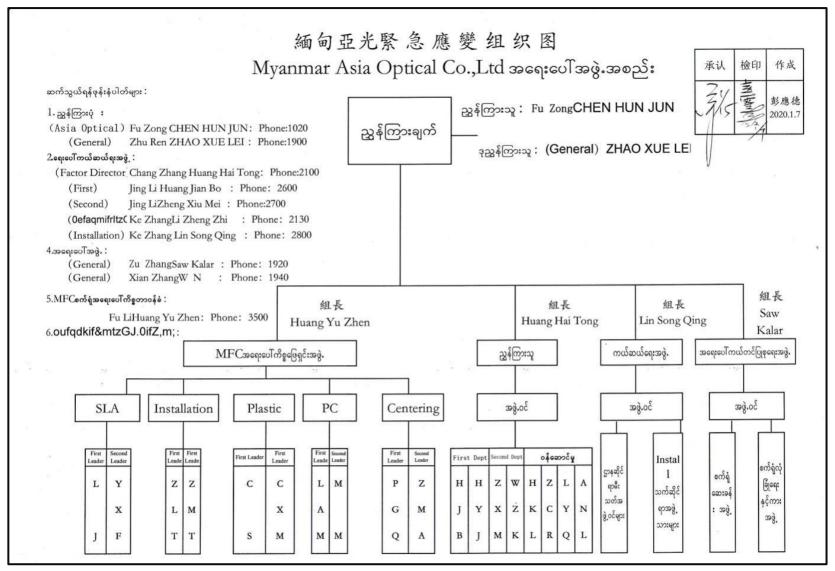


Figure 9-2 Emergency Response Team Organization Chart

# 9.3 Evacuation Routes

Evacuation routes maps have been posted in each work area. The following information is marked on evacuation maps.

- Emergency exists
- Primary and secondary evacuation routes
- Locations of fire extinguishers
- Fire alarm pull stations' location (e.g., Assembly points)

All the employees in the factory should know at least two evacuation routes. Each individual factory owner needs to take responsibility for ensuring the safety of his /her employees by taking adequate steps to rectify these problems. All buildings, including extensions to the factory, must meet legal standards and electrical equipment should be properly maintained. At the same time, they must ensure that managers, supervisors and workers are properly trained in fire and safety procedures; and that exit routes are sufficient for the number of workers employed in the factory. Factory gates should be kept unlocked at all times whenever workers are in the building.



Figure 9-3 Emergency Routes Hanged up on the Wall

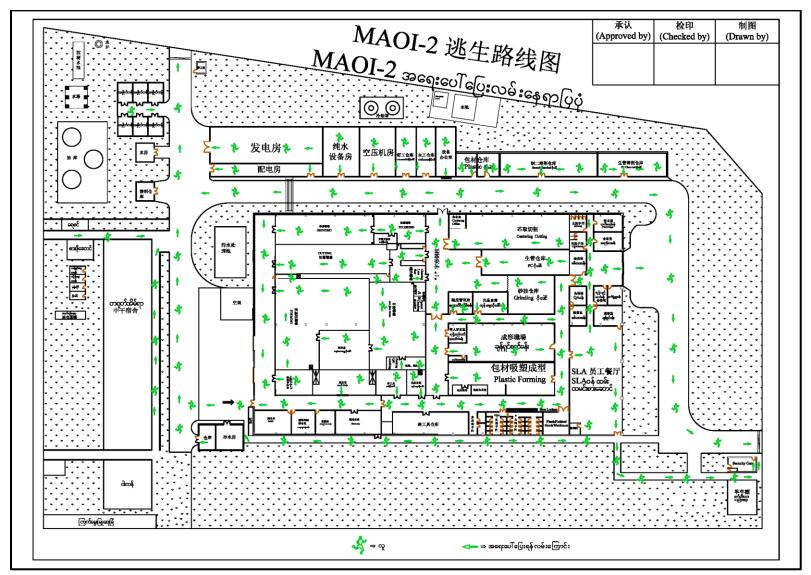


Figure 9-4 Emergency Route Map of Factory-2

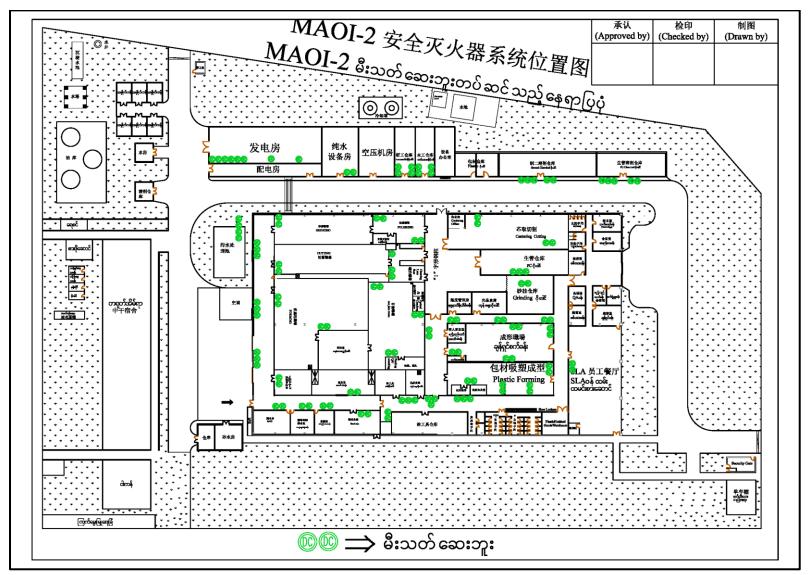


Figure 9-5 Fire Extinguisher Installed in Factory-2

# 9.4 Fire Emergency Plan

The factory has an emergency plan deals with any fire situation. The purpose of an emergency plan is to ensure that the people in factory premise know what to do if there is a fire and that the factory premise can be safely evacuated.

The factory gives clear and relevant information and appropriate instructions to their employees about how to prevent fires and what they should do if there is a fire.

- ➤ If the location of the fire is detected by a fire smoke detector, the security must immediately check.
- After receiving information from the Executive Steering Committee, go to the scene and report the incident to senior management of the company as soon as possible.

# 9.4.1 Organization and Responsibilities

The organization chart and their responsibilities of the fire emergency management team are as follow.

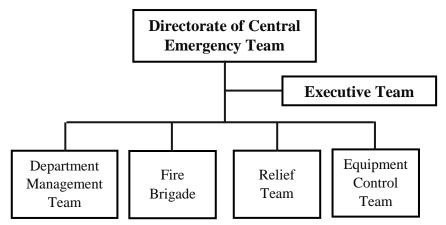


Figure 9-6 Organization Chart of Fire Emergency Management Team

Table 9-2 Duties of the Fire Emergency Management Team

	2 2 wises of the 1 in 2 mongement 1 cm.			
Sr. No.	Position	<b>Duties/Responsibilities</b>		
1.	Directorate of Central	> To nominate significant decision and guidelines on		
	Emergency Team	large fire hazards		
		> To confirm emergency plan deals with any fire		
		situation		
		➤ To start directive of fire hazards		
2.	Executive Team	The appointment and organization of designated supervisory employees to carry out fire safety duties		
		➤ To check the fire safety plan and fire code when fire systems are in need of repair		
		➤ To advise the fire department of the system status		
3.	Department	> To arrange for the emergency plan to be issued to their		
	Management Team	employees, visitors, etc. to inform them what to do in		
		the event of fire, particularly safe evacuation		
4.	Fire Brigade	> To protect property in the event of fire and extinguish		

Sr. No.	Position	Duties/Responsibilities	
		fire	
5.	Relief Team	➤ To Rescue employees	
		> To do relevant communication	
6.	Equipment Control	➤ Oversee and arrange for the maintenance procedures of	
	Team	fire protection equipment and other electrical systems	
		after occurring fire hazards	

# 9.4.2 Emergency Resolutions Procedure

The fire emergency resolutions procedure of the MAOI is described in the following chart.

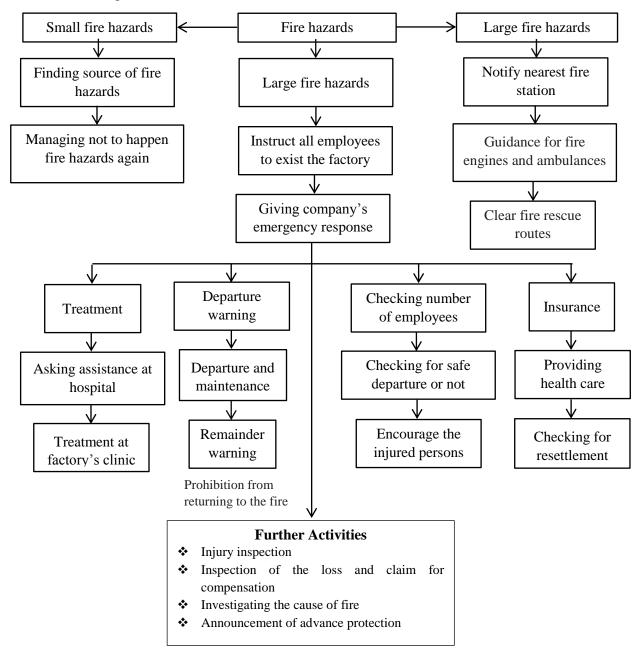


Figure 9-7 Fire Emergency Resolutions Procedure Flow Chart

# **Departure Activities**

- ❖ To evacuate employees from the fire as quickly as possible
- ❖ To guide clearly the runners by sound system
- ❖ To confirm all employees are safe from fire or not
- Not to take place robbery, must maintain the company's property
- ❖ To guide fire engines to the site of the fire

# **Fire Fighting Activities**

- ❖ Before firefighters arrive, fire extinguishers must be used to extinguish or control the scene of the fire.
- ❖ When firefighters arrive, employees must help to extinguish the fire.
- To rescue employees who are trapped in a fire
- To carry out company's property if you are safe from fire

#### **First Aid Activities**

- To rescue the injured persons
- ❖ To report the injury status

# **Equipment Control Activities**

- ❖ After an accident, lights must be switched off and emergency lights must be lit
- After confirming there is no people in the elevator, it must be stopped in a safe place and the lights must be switched off.

#### **Troubleshooting Activity**

- ❖ After the fire, the Department of General Services is responsible for implementing the company's repairs.
- ❖ The pollution and wastes caused by fire must be collected and disposed as soon as possible.

#### **Insurance Claim**

❖ After the fire, the fire department must immediately contact the insurance agency and conduct field inspections. Company's finance department shall carry out the insurance claim.

# Investigation

- ❖ The central directive team organizes investigation team to investigate the cause of the fire and to assess the consequences of the incident. If necessary, experts will be invited and investigated.
- \* Resolutions will be collected by the Department of General Affairs. The relative department will be notified by conference call or announcement.
- ❖ The Department of General Affairs will take the relative department and employees, discuss the accident and pre-planning not to happen again.

❖ The executive team shall cooperate fully in the judicial investigation and resolution of any government sponsored activities.

The company conducts firefighting demonstrations and emergency departure twice a year.

## 9.4.3 Fire Fighting and Protection Measure

- In every section of the factory, there shall be provided and kept in readiness adequate equipment for firefighting and protection.
- Each item of firefighting equipment shall be inspected and tested at appropriate intervals by a competent person. The date of the last inspection shall be entered in a logbook kept for that purpose.
- All the personnel employed in the installation shall be instructed on the use of firefighting equipment.
- Instruction to personnel in case of fire shall be clearly and concisely expressed in writing and prominently displayed on the site.
- "NO SMOKING" signs shall be conspicuously displayed at strategic locations in the factory and was highlighted in the case of identification in dull bright.
- Be alert around electrical equipment. If electrical equipment is not working properly or if it gives off an unusual odor - often the first sign of a problem that could cause a fire - disconnect the equipment and call an appropriate maintenance contractor.
- Whenever a fire or any accident occurs in the installation, notify the nearest fire station.

The diagram below illustrates the color coding of fire extinguishers (so it should be printed in color) and can be used as a guideline for Fire Extinguisher selection.

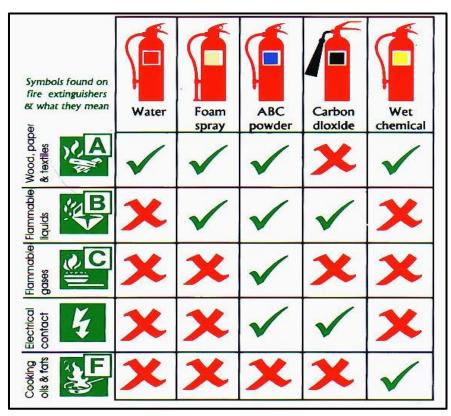


Figure 9-8 Selection Guidelines for Fire Extinguishers

# 9.4.4 Fire Fighting Equipment

Firefighting equipment can reduce the risk of a small fire, e.g. a fire in a waste-paper bin, developing into a large one. The safe use of an appropriate fire extinguisher to control a fire in its early stages can also significantly reduce the risk to other people in the factory premise by allowing people to assist others who are at risk. The equipment will need to comprise enough portable extinguishers that must be suitable for the risk.











Figure 9-9 Firefighting Equipment Used in Factory-2

The following requirements must be considered for installing firefighting equipment:

- **Location** smoke detectors, sprinklers, fire extinguishers and hoses are to be placed in readily accessible locations and in all areas where risk of fire is likely.
- Access clear access is always to be maintained around fire extinguishers and hoses.
- **Signage** signage is to be provided at each location, indicating the type of fire extinguisher and fire types that they are suited for.
- *Mounting* fire extinguishers are to be mounted on purpose-made hooks or brackets and suspended above the floor.
- *Inspection* fire extinguishers are to be inspected and serviced every six months.

# (a) Signs

Signs must be used, where necessary, to help people identify escape routes and find firefighting equipment. Where the locations of escape routes and firefighting equipment are readily apparent and the firefighting equipment is visible at all times, then signs are not necessary. In all other situations it is likely that the fire risk assessment will indicate that signs will be necessary.



Figure 9-10 Photos of Emergency Exit Way

# (b) Notices

Notices must be used, where necessary, to provide the following:

- Instructions on how to use any fire safety equipment;
- The actions to be taken in the event of fire; and
- Help for the fire and rescue service (e.g. location of electrical cut-off switches)

All signs and notices should be positioned so that they can be easily seen and understood.



Figure 9-11 Photos of Notices

# (c) Positioning of Escape Signs

The presence of other signs in factory such as employees' notices can distract attention from, or obscure the visibility of, escape signs. This could affect people's ability to see and understand escape signs, particularly if there is a fire evacuation. Escape signs should meet the following criteria:

- ❖ They should provide clear, unambiguous information to enable people to safely leave a building in an emergency.
- ❖ Every escape route sign should, where necessary, incorporate, or be accompanied by, a directional arrow. Arrows should not be used on their own.
- ❖ If the escape route to the nearest exit is not obvious then it should be indicated by a sign.
- ❖ Signs should be positioned so that a person escaping will always have the next escape route sign in sight.
- ❖ Escape signs should be fixed above the door in the direction of escape and not be fixed to doors, as they will not be visible if the door is open.
- Signs mounted above doors should be at a height of between 2.0 m and 2.5 m above the floor.
- ❖ Signs on walls should be mounted between 1.7 m and 2.0 m above the floor.
- ❖ Signs should be sited at the same height throughout the escape route, so far as is reasonably practicable.

#### 9.4.5 Operating a Fire Extinguishers

Fire extinguishers should be only used if safe and if trained to do so. Even though extinguishers come in a number of shapes and sizes, they all operate in a similar manner. To employ the extinguisher with proper technique, just remember the acronym "PASS."



**P** - Pull the pin at the top of the extinguisher that keeps the handle from being accidentally pressed.

**A** - Aim at the base-not the flames. This is importantin order to put out the fire, you must extinguish the fuel.



**S** - Stand approximately 8 feet away from the fire and squeeze the handle to discharge the extinguisher. If you release the handle, the discharge will stop.



S - Sweep the nozzle back and forth at the base of the fire and then move towards the fire once it starts to diminish.

After the fire appears to be out, watch it carefully since it may re-ignite! Be sure to read the instructions on your fire extinguisher different fire extinguishers recommend operating them from different distances.

# **Precautions for Using Fire Extinguishers**

- 1. Ensure that you use the correct extinguisher.
- 2. Always keep an emergency exit behind you. (Away from the fire)
- 3. Stay low to avoid the effects of smoke/heat.\
- 4. Direct extinguisher stream at base of flames.
- 5. Move stream in a side to side, sweeping motion.
- 6. If the fire gets to the point where you can no longer able to control it, retreat and close the doors. (Do not lock)

Fires have been classified into six categories involving different substances:

- Class A, combustible carbon-based solids e.g. paper, wood or textiles
- Class B, flammable liquids e.g. paraffin, petrol, diesel or oil (but not cooking oil)
- Class C, flammable gases, e.g. butane, propane or methane
- Class D, burning metals, e.g. aluminum, lithium or magnesium
- **Fires caused by electrical equipment** (indicated by an electric spark symbol and not the letter E)
- Class F, fats and cooking oils.

## Types of extinguishers to use

- Class A fires water, water mist, foam, dry powder, wet chemical
- Class B water mist, foam, dry powder, CO2, some wet chemical
- Class C water mist, dry powder
- Class D specialist dry powder
- Electrical water mist, foam, CO2
- Class F water mist, wet chemical.

# 9.5 Emergency Medical Services

## 9.5.1 Health Care in the Factory

Staffs are the company's most important asset. The protection of the health of workers is the greatest responsibility of MAOI.

The MAOI has on-site medical services and there is only one clinic in MAOI-1 compound for both factories. Factory-paid nurses may be pressured to prioritize production over improving workers' health. Without adequate care, minor illnesses or injuries can become major problems. The factory owners care and support for injured workers and also pay medical costs for those injured on the site. They also support the health education because it reduces worker illness, absence and turnover and so increases worker productivity.



Figure 9-12 Clinic in Factory-1 Compound

## 9.5.2 First Aid and Emergency Care

It is important that every workplace has first aid supplies and provides training to help themselves and others response to emergencies. Trainings are happening regularly.

First aid supplies are kept in safe, clean places throughout the factory. Workers are able to access them easily. The first aid kits include materials to treat common injuries such as burns, cuts, falls, and other minor injuries. Workers and supervisors are trained in how to do first aid and stabilize and injured person until they can get to help.

## 9.5.3 Women Workers and Women's Health

Most of the workers in factory are women. Their health needs are not considered part of basic care and occupational health. Since many chemicals affect

women's reproductive systems, pregnant workers are paid leave to care for problems with the mother's health and with the baby.

# 9.6 Occupational Health and Safety System

The company is concerned with the health, safety and environment protection. The company will formulate and develop an "Occupational Health & Safety System" to ensure good health and safety of its employees.

The following key safety measures shall be a part of the Health & Safety system of the company and shall be followed:

- Safety Training shall be provided to the employees.
- Safety Sirens with Alarm System in case of emergency shall be provided.
- Fire Extinguishers shall be provided.
- Mock drills shall be periodically conducted and factors like response time shall be evaluated.
- First Aid Facility and training shall be provided.
- PPEs shall be provided to the employees.
- Health check-ups shall be organized at regular intervals.
- Safety/Health records and MSDS shall be maintained.

# 9.6.1 Occupational Health Surveillance Programme

Occupational Health Surveillance (also termed as medical surveillance for employees) constitutes an important component in efforts to protect and improve employees' health. It is the systematic collection, analysis, and dissemination of disease data on groups of employees and is designed to detect early signs of work-related illness. A well-run medical surveillance program can aid in the early recognition of a relationship between exposure to a hazard and disease, in the assurance of the safety of new substances, and as an indicator of the effectiveness of existing control measures.

As a vital control measure, medical surveillance employs the use of questionnaires, physical examinations, ancillary testing, and biologic monitoring. Effective use of biologic monitoring – that is, the testing of various body specimens for the toxic substance itself, its metabolites, or physiologic dysfunction. The Factories Act, 1948 and the rules framed there under provide for pre-employment and periodical medical examinations of workers employed in industries with hazardous processes and dangerous operations.

## 9.6.2 Industrial Accidents Survey Management

The occurrence of industrial accidents caused directly or indirectly employee of life or property damage, from small wound, e.g. skin broken, to large casualty. And that also demonstrate the loophole in the management or design. By managing the accidents investigation, MAOI can find out the cause root, and then make countermeasures to prevent or reduce the risk of reoccurrence.

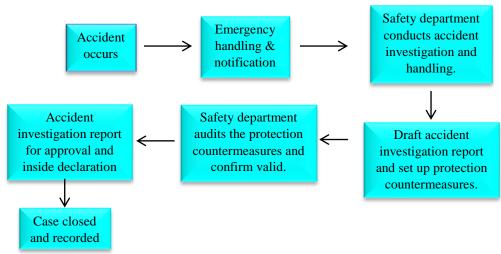


Figure 9-13 Flow Chart for Industrial Accidents Survey Management

# 9.7 Natural Hazard

The "Hazard Profile of Myanmar" prepared by five government ministries and departments of Myanmar and four non-governmental agencies in July 2009 describes nine types of disasters in Myanmar: (1) Cyclone, (2) Drought/ Dry zone, (3) Earthquake, (4) Fire, (5) Flood, (6) Forest Fire, (7) Landslide, (8) Storm, and (9) Tsunami.

Fifty percent of the total number of disasters in Myanmar was related to floods followed by storm (23%), earthquake (15%), and mass movement-wet (12%), whereas 73% of the total affected people by disasters were due to storm followed by floods in 1980-2011. Similarly, storm is a major cause of disaster-related death and biggest estimated damage cost (86%). Earthquake (11%) and flood (3%) are next on the estimated damage cost.

## **9.7.1** Flood

Many floods are caused by storm rainfalls from the southwest monsoons in July to October. Rainfall in the mountains and highlands causes flood damage in the central plain and coastal areas. Flooding spanned over the long term at the delta near the river mouth. Locations of flood disasters in Myanmar are as shown in **Figure 9-14**.

Floods in Greater Yangon can be classified into three types: (i) river flood; (ii) localized flood inundation in urban areas due to a combination of factors such as cloudburst, poor infiltration rate, poor drainage infrastructure (possibly due to climate change, heat island phenomenon); and in rural areas due to decrepit dams, dikes and levees, and (iii) floods due to cyclone and storm surge.

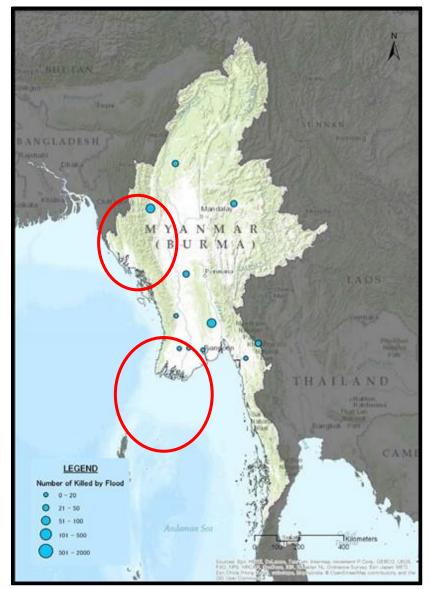


Figure 9-14 Locations of Flood Disaster in Myanmar

# 9.7.2 Earthquake

The country is exposed to earthquakes due to its geographical location within the Alpide Belt, which is noted to be the most seismically active zone in the world with multiple damaging earthquakes and volcanic eruptions having occurred there. The country itself is besieged by a series of faults, of which the Sagaing fault is the longest, trending north to south across the central part of the country. Yangon City is about 30 kilometers west of the Sagaing fault. History suggests that earthquakes have had grim consequences on lives, social assets, and physical systems in the region. According to the seismicity and the records of the previous considerably high magnitude earthquakes, Yangon Region can be regarded as the low to medium seismicity region. Moreover, tectonically the region is surrounded by the subduction zone between the Indian Plate and Burma Plate to the west and the right lateral Sagaing fault to the east. Based on the Peak Ground Acceleration (PGA) values and

past records, the cities are classified as Low Zone, Moderate Zone, Strong Zone, Severe Zone and Destructive Zone.

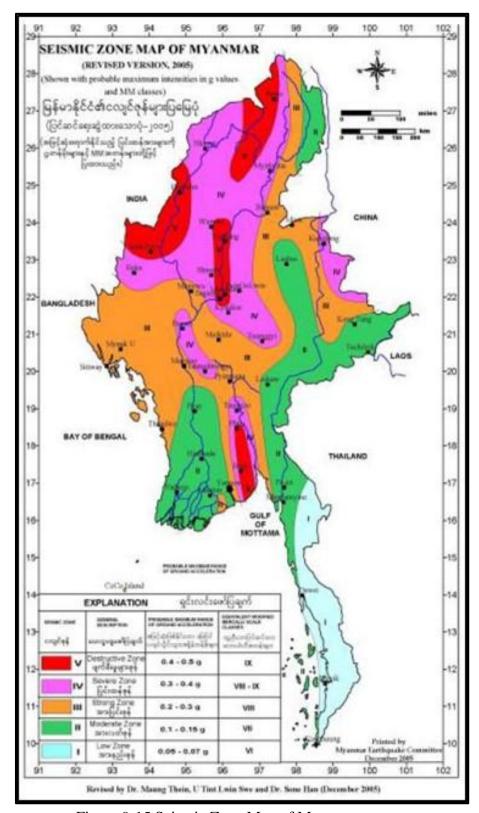


Figure 9-15 Seismic Zone Map of Myanmar

# 10.0 CAPACITY DEVELOPMENT AND TRAINING

Capacity building of the factory officers will enhance the awareness of the manufacturing case of cleaner production and possibly also of the need for ensuring compliance with local legislation. The training programme begins with a detailed needs assessment phase, involving engagement with factory owners, management, supervisors, trade union representatives and workers to understand each factory's priorities and needs. The HR training modules focus on a number of key topics, including establishing clear roles and responsibilities, as well as introducing support networks (such as buddying schemes) and formal and accessible communications and feedback systems.

# 10.1 Company Working Task Force

# 10.1.1 Human Resource Policy

The human resource policy relevant to employment, recruitment, dismissal, salary, welfare, labor insurance, labor protection and labor discipline of the employees of the Company shall be carried out in accordance with the relevant policies.

The company has the right to give a warning to workers who violate the rules and regulations of the company and disciplines of labor discipline and pay a reduction of wages. If the circumstances are serious, they may be dismissed, and the dismissed workers shall be reported.

Wages and salaries of employees of the Company shall be in accordance with the relevant laws and the board of directors shall determine the standards in accordance with the operating conditions of the Company.

Employee benefits, bonuses, labor insurance and other matters, the company will be provided in the system.

The Company provides training to employees in terms of occupation, work skills and working knowledge, so as to promote positive progress and improve their abilities.

## 10.1.2 Employee Complaint Mechanism

There are several reasons to set up the Employee Complaint Mechanism:

- ✓ to safeguard the legitimate rights and interests of the company and employees,
- ✓ to detect and deal with hidden problems in time,
- ✓ to smooth the communication between employees and the management,
- ✓ to improve work motivation,
- ✓ to establish a harmonious labor relation, enhance enterprise cohesion,
- ✓ to improve employee satisfaction

The scope of the appeal shall be within the functions of the Human Resources Department, including but not limited to the following:

- if employees disagree with the performance appraisal, rewards & punishments they should follow the policy of "staff performance evaluation feedback and rewards and punishments management approach",
- the objection about the position, grade rank adjustment,
- > the objection about recruitment, training,
- > the objections about salary, benefits, attendance,
- ➤ the objection about signing labor contract, and renewal, change, release, termination and other aspects of employment contract,
- ➤ the objection about meal, reasonable vehicle arrangement and other administrative stuffs,
- > the complaint about unfairly treatment by superior or colleagues,
- ➤ the other matters which complainants have evidence to prove that his/her rights have been violated.

If employees disagree with the performance between them according to the scope, the Workplace Coordinating Committee (WCC) will solve the problems.

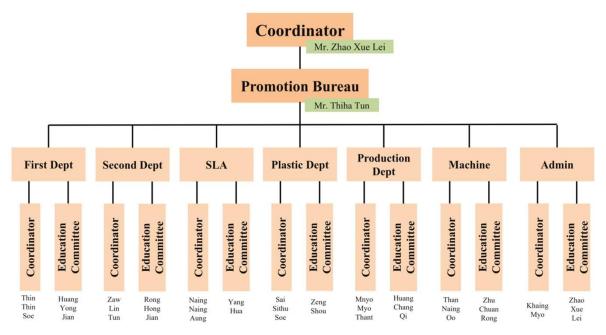


Figure 10-1 Organization Chart of WCC

# 10.1.3 Emergency Response Team

The emergency contact numbers of township and district fire department must be printed and tagged at easily visible places fire emergency cases.

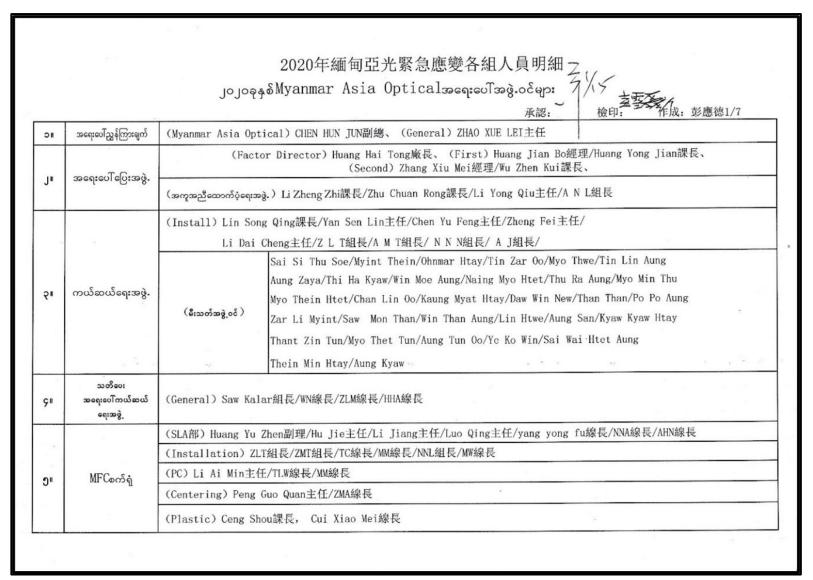


Figure 10-2 Emergency Response Team

# **10.1.4** Internal Emergency Communication (Factory-2)

The internal emergency communication for MAOI-2 is as follow.

Table 10-1 Firefighting Team

Sr. No.	Name	Department
1.	U Min Thu Htwe	Generation
2.	U Zaw Lin Tun	Installation
3.	U Nyi Nyi Naing	Installation
4.	U Myo Aung	SLA

Table 10-2 Equipment Moving Team

Sr. No.	Name	Department			
1.	U Min Min Tun	SLA			
2.	Shang Hou	Plastic			

Table 10-3 Security Team

Sr. No.	Name	Department	Sr. No.	Name	Department
1.	U Win Than Aung	Generation	7.	U Ye Ko Win	Generation
2.	U Aung San	Generation	8.	U Aung Kyaw	Generation
3.	U Kyaw Kyaw	Generation	9.	U Aung Khant Mg	Generation
	Htay				
4.	U Aung Tun Oo	Generation	10.	U Chit Phoo Aung	Generation
5.	U Thant Zin Tun	Generation	11.	U Kyaw Zin Khaing	Generation
6.	U Khaing Htet Lin	Generation	12.	U Than Than	Generation

Table 10-4 Search and Rescue Team

Sr. No.	Name	Department	Sr. No.	Name	Department
1.	Daw Win Win New	Generation	7.	Daw Pan Nu Swe	Generation
2.	Daw Hnin Hnin Wai	Generation	8.	Daw Chaw Ei Hmone	Generation
3.	Daw Zarli Myint	Generation	9.	Daw Lwin Marlar Oo	Generation
4.	Daw Po Po Aung	Generation	10.	Daw Win Min Swe	Generation
5.	Daw Saw Mon Than	Generation	11.	U Aung Kyaw Kyaw	Generation
6.	Daw Thet Yee Mon Kyaw	Generation	12.	U Aung Kyaw Min	Generation

Table 10-5 Reporting Team

Sr. No.	Name	Department
1.	Hong Lui Ping	Plastic
2.	Zeng Ping Yan	SLA

# 10.2 Employee's Welfare Plan

Employee welfare raises the company's expenses but if it is done correctly, it has huge benefits for both the employee and the employer. In fact, employee welfare is in the interest of the employee, the employer and the society as a whole. The objectives of employee welfare are:

- It helps to improve the loyalty and morale of the employees.
- It reduces labour turnover and absenteeism.
- It helps to improve employee productivity.
- Welfare measures help to improve the goodwill and public image of the company.

The project proponent has set up the following items as employees' welfare plan.

- Provide the dormitory and social security expense.
- Provide the accommodation for foreigner staff.
- Provide food store, library and clinic inside the factory compound
- Provide the transportation charges and dormitory expense for leaders lived in rent.
- Have 96 toilets in total for employee.
- Discharge the domestic water and process water, according to government's guideline.
- Install the wastewater treatment plant and wastes are discharged according to emissions standard.
- Plan the trips, year-end party including the game and lucky draw sections, yearly.
- Award the best employee as 5<sup>th</sup> year, 10<sup>th</sup> year company anniversary.
- Celebrate the birthdays, cakes and meal for extra.
- Held the sport matches monthly.
- Held the Dahmah Thabin Pwel yearly.
- Provide the wedding present, pregnancy and funeral allowance.

#### 10.2.1 Accommodation

The project proponent arranges dormitory with full facilities for foreign technicians at the factory-2 and for local employees at the factory-1.



Figure 10-3 Dormitories (Factory-2)

#### **10.2.2 Uniform**

All the employees are supplied with uniforms.

- The fresher employees are supported two sets after one month working in factory. [for a complete year]
- Depend on the job position, supply one time per six month.
- Employees needed to wear shoes, card and coat according to position supply as essential.



Figure 10-4 Uniform

### 10.2.3 Meal System

Meal system is provided for all the employees. Employees can eat lunch and dinner at canteen. The chief and cleaners are provided for canteens and kitchen. Only one kitchen is located in the factory-1.



Figure 10-5 Three Months Routine Menu



Figure 10-6 Kitchen



Figure 10-7 Canteen for Staffs (Factory -2)

#### 10.2.4 Health Care

The company provides clinic with nurse aid, certificate holder (free of charge) for all employees in addition, purified water is provided for staff drinking water. Only one clinic is located in the factory-1. Appropriate sanitation facilities are installed, and regular disinfection work carried out. The project proponent provides the following health programs.

- Medicine and first aid kits are available in every section of the factory to address emergency cases.
- The factory has a clinic for staffs who feel sick.
- The project proponent trains employees on basic health care. It aims to teach staff how to provide first aids for injured person during emergency cases.

Table 10-6 Medicine List

Sr. No.	Name	Sr. No.	Name	Sr. No.	Name
1.	75% Alcohol	82.	Local inj:	163.	Contac NT
2.	3/0 Thread	83.	Menthol plaster	164.	Dexamethasone tab china
3.	3/0 Cutgut	84.	Metoclopramide (Maxalon)	165.	Dexamethasone cream
4.	25% Glucose inj	85.	Metronidazole	166.	Duo Pan Li tong Pian
5.	27 G needle	86.	Mannyl inj	167.	Ephedrine Nasal
					HydrochiorideNosal Drops
6.	3" Syringe	87.	Metro inj	168.	Erythromycin eye
					ointment
7.	3" Bandage	88.	Maxalon inj	169.	Fu Fang An
8.	4" Bandage	89.	MOM	170.	Feng You Jing
9.	5" Syringe	90.	Norflox * eye drop	171.	Chloramphenicol maleate
10.	5% Glucose inf (DW)	91.	Norflox	172.	Gan Kang 2
11.	20 ml 20 cc syringe	92.	Neurobian tab blue	173.	Gan Mao Ling Keli
12.	Ascptol	93.	Normal Saline	174.	Gan Mao Ling Jiannang
13.	Atenolol	94.	Omezal	175.	Gan Mao Ling
14.	Antacid gel	95.	ORS	176.	Golden Throat
15.	Atropine Inj:	96.	Battery 3V	177.	Ke Ke Jiao Nang*
16.	Kemose 2	97.	Paper Plaster	178.	Qu Xiang Zheng Qi Shui

Sr. No.	Name	Sr. No.	Name	Sr. No.	Name
17.	Amoxycillin	98.	Paracetamol BPI	179.	Hou tong ling pian
18.	Amoxycillin Cap	99.	Plastic Glove	180.	Ichthammol Ointment
19.	Ampiclox	100.	Plastic Bag	181.	Jian Wei Xiao Shi Pian
20.	Aminophylline inj	101.	Propornolol	182.	Ji ng Wan Hong
21.	Analgesic Plasterfor	102.	Pressure Calf pad	183.	Josamycin tab
	Arthritis	102.	•	105.	,
22.	Andrographitis	103.	Ranitidine tab	184.	Keyangmin xu
23.	ATT	104.	R/L	185.	Keteling
24.	Azeptil Inj:	105.	Ranitidine inj	186.	Levoflox china
25.	Begesic	106.	Septidine	187.	Li Jun Sha
26.	Bisolvin inj	107.	Silverdern	188.	Long Ma Yi Fu Ning *
27.	Bladge	108.	Skinel cream	189.	Lincomycin
28.	BP card	109.	Sofratulle	190.	China Tiger *
29.	Brom	110.	Surgical Glove	191.	Metronidazole and
					Fenbufen Cap
30.	Burmeton inj	111.	Salbutamol inhaler	192.	Yan Yan Pian *
31.	Burmeton	112.	Slow K	193.	Kang Jun Xiao Yan Jiao
	Durnicton				Nang *
32.	Buscopan Inj:	113.	Scalp vein	194.	Mycostatin
33.	Buscopan Tab	114.	Sonexa-c	195.	Norfloxacin(china)
34.	Cifran Eye Drop	115.	Stethosco	196.	Neomycin cream
35.	Steel Cup	116.	Stimitil	197.	NiuHuang Jiedu Pian
36.	compound miconazole	117.	Sticking tape (coconut tree)	198.	Ofloxain Ear Drop
37.	Cifram Tab	118.	Thermometer	199.	Panadol
38.	Celexin	119.	Tetracycline Eye Ointment	200.	Qutong pian (COX II ) Hansa
39.	Cannular	120.	Tetracycline Eye Tab	201.	Roxithromycin
40.	Cloxa Cap	121.	UCG	202.	Roxithromycin Dispersible
41.	Cifran Tab	122.	Sprit	203.	Shuang Huang Liang Kou Fu Ye
42.	Caladyl solution	123.	Ventolin Tab	204.	sulfer ointment
43.	Cotton Bud	124.	Vitamin B1	205.	Tiger Plaster
44.	Cotton rod	125.	Vitamin B1 Vitamin B2 Tab	206.	Wei C line
45.	Cup	126.	Vitamin B6 Amp	207.	Wei C green
46.	Digene	127.	Vitamin B6 Tab	208.	Xie Li Ting
47.	Dexamethasone Inj	128.	Vicee Tab	209.	Fu Zhi Fang
48.	Doxycycline Tab	129.	Vitamin C inj	210.	Yun Nan Bai yao Powder
49.	Dextro	130.	Vitamin C Tab	211.	Zhenggu shui
50.	Diclo Fenac tab	131.	Wokadine (Small Size)	212.	zhan zhu min mu yan ye
51.	Diclo Fenac inj	131.	Wokadine (Large Size)	213.	Trimetazidine
52.	Dit gel	133.	Weight Machine	214.	Greengel
53.	Diclo gel	134.	Zocovin Cream	215.	Ferrovit
ارد	DICIO goi	134.	Zocoviii Cieaiii	413.	1 OHOVII

Sr. No.	Name	Sr. No.	Name	Sr. No.	Name
54.	Dettol	135.	Zocovin Tab	216.	Oramin.G
55.	Dopamine Inj:	136.	Glass measuring cup	217.	Cetrazine
56.	D/L	137.	Theophylline ephedrine	218.	Cotton roll Small
			tablets		
57.	N/S	138.	Long hemostatic forceps	219.	Scissor
58.	Dicotil Tab	139.	Needle holder	220.	zinc oxide
59.	Dexona Eye drop	140.	Big can	221.	Sonaderm GM
60.	Dexa Tab	141.	Big can	222.	panbiccort inj
61.	Dolfenal Tab	142.	Knife handle	223.	panbiccort inj
62.	DripSet	143.	Flashlight	224.	Pan Bu
63.	E glove	144.	Short hemostatic forceps	225.	Bcomplex Tab
64.	Erythromycin cream	145.	Square box	226.	Bcomplex inj
65.	Erythromycin	146.	Square plate	227.	Mico-bio
66.	Flumol	147.	Dressing can	228.	Counter plast
67.	Frusid tab	148.	Compound Paracetamol	229.	Ibuprofen (China)
			Amines (Gangkang)		
68.	Face mask	149.	Ribavirin inj	230.	Houjiling jiaonang
69.	Furosemide Inj	150.	Tweezers	231.	San Huang Pian
70.	Gauze	151.	Hot water bottle	232.	Wai U [Vit V]
71.	Gener Log	152.	Triangle needle	233.	neurobian Tab red
72.	Gentamicin	153.	Sand cloth pliers	234.	K. Vit Inj
73.	Glucose 粉	154.	Silk thread	235.	Water
74.	Hansaplast	155.	Curved shear	236.	Eye Drop
75.	Hot Bag	156.	Di Tong Bi Yan Shui	237.	Zong Sheng Wan
76.	Hydrocortisone	157.	Paracetamol BPI	238.	Folic Acid
77.	Ibuprofen(Myanmar)	158.	Ren Gong Nihuang Jiao	239.	Cup
			Xiao Zuo jiaoNang		
78.	Inj: Nuramin Forte	159.	China Amoxicillin	240.	Biogesic
79.	K Vitamin tab	160.	Axe Brand red Flower oil	241.	Asipilin ChanGrong
80.	Kemose 1	161.	Balange Keli	242.	Pudilan xiao yan Pian*
81.	Levo Flox Tab	162.	Belladonna	243.	Bioplaceton



Figure 10-8 Certificate of Nurse



Figure 10-9 Clinic

#### **10.2.5 Parking**

The project proponent provided parking area for trucks, cars, and motorbikes with safety lines and broad space.





Figure 10-10 Parking Areas (Factory-2)

#### 10.2.6 Locker Room

The employees worked at the factory are supplied with lockers. Before the entering the workplace, they can temporarily store their important things in them.

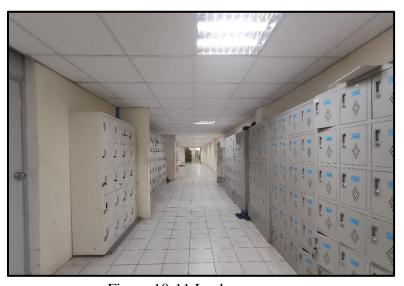


Figure 10-11 Lockers

#### 10.2.7 Social Security Fund

All employees are given an additional 2% of their salary for SSP (Statutory sick pay) contributed by the company toward health care, social security and injury fund. In addition, workers are provided aid-money for both good events and funerary ceremony. For giving birth of female workers, they can get 90 days' leaves, 2 days leave for wedding and other leave (sick leave, annual leave etc.) will be drawn up.

#### 10.2.8 Staff Activities

The project proponent organizes and pays for additional out of work activities for the employees to participate in. e.g., fusel football match, karaoke competition, cooking master competition, annual staff party, trip, dancing competition, donation and so on.



















Figure 10-12 Donation

# **10.3** Reporting Requirements

#### 10.3.1 Documentation

The following documentation must be kept at Project Manager Office in order to maintain the record of compliance to the EMP for future references:

- Record of Complaints
- Monitoring Results
- Notification of Emergencies and Incidents.

Environmental Register which is maintained and kept in custody of the manager responsible for operations at the factory. It may contain the following information, observations and records:

- The manager will report incidents involving employees and / or the public that could potentially cause negative sentiments and perception towards the project.
- Report environmental complaints and correspondence received from the public to the Project HR Manager or the Environmental Manager.
- Record and report incidents that cause harm or may cause harm to the environment to the Environmental Manager.
- Record all hazardous materials used on site.
- Maintain a record of all hazardous waste disposal manifests detailing the nature of the hazardous waste disposed of the hazardous waste classification and the location of the site to which such waste was sent.
- These records will be kept with the EMP, and will be made available for scrutiny if so requested by the Project Manager or his delegate or the Environmental Manager.
- The Environmental Manager will ensure that the following information is recorded for all complaints / incidents:
  - ➤ Nature of complaint /incident
  - ➤ Causes of complaint /incident
  - ➤ Party/parties responsible for causing complaint/incident
  - ➤ Immediate actions undertaken and/or to be taken to address and to prevent reoccurrence of the complaint/incident
  - > Timeframes and the parties responsible for the implementation of the corrective or remedial actions
  - ➤ Copies of all correspondence received regarding complaints /incidents.

#### 10.3.2 Reporting

The project proponent will establish and maintain a procedure to monitor and report key characteristics of its operations and activities that have potential to have a significant impact on the environment.

Reports are to be forwarded to the Project Manager. This will comprise the incident reporting protocol and will allow the Project Manager to determine the effectiveness of environmental measures implemented in reducing impacts on the environment and/or to determine the extent of potential environmental harm. The measures ensure the management of the activity will achieve ongoing minimization of the activity's environmental harm through cost effective measures.

Environmental harm is defined as any adverse effect on the environment (of whatever degree or duration) and includes an environmental nuisance. The responsibilities for reporting environmental incidents are as follows:

- The person discovering a reportable environmental incident, as described below, on the proponent's site must report it to the proponent,
- The proponent may report the incident to external organizations that are needed to provide response support,
- The proponent gathers details about the incident and supplies them to the Environmental Committee; and
- Project Manager is responsible for reporting environmental incidents to relevant external organizations who are not involved in immediate response.

Incidents must be reported to the Department of Environmental Management as soon as reasonably practicable, but no later than 24 hours, after becoming aware of the release of a pollutant occurring as the result of an emergency, accident or malfunction in relation to any harmful activity.

				MAOI Co	o.,Ltd	2019 ခုနှစ်လုပ်ငန်းခွင်ထိခိုက်ဒဏ်ရာမှတ်တ	S:				
序號	姓名 300년	卡號 თანთყონ	部門 524	發生日期 ලිර්ගුන්නන්.අන් ද	入社日期 οδορδ	ထိနိုက်ပုံခံ	程度 %8:000	工作 損失日 3000年前旬	傷殘 အကြွေးကျန်ခဏ်ရ ၁	費用 /元 エキョン・ロック・ファ	備注 young
1.	Win ko ko	138304	Polishing	2.4.2019	12.11.200	တ်ဖုံးသို့တို့ ၁) မွေနေ့ လိုက်သဉ် လေ့နှေ ဤ ၅ ( ခြေ စ		3905	68	68	
2.	Khin Yeon	148123	8T	4-5-2019		omig ମୁଟି ଫରିଆ ହେବ, ଷ୍ଟିମିନ ନିକ୍ଷେକ ଲାପ୍ତା ବଞ୍ଚିତ ଟୋଲାଥିତ ବ୍ୟୁକ୍ତି । ସହିତ୍ୟକ ମଧ୍ୟ ଅଧ୍ୟକ୍ତି । ପ୍ରଧିକ ଜାପ୍ତା ବଞ୍ଚିତ ଦଳ ପ୍ରଧ୍ୟ ସମୟ ଥିଲି ।		3705	48	180	7-1
3.	Sandar Lin	110601	QA.	20.9.2019		2) (2) (1) (2) (3) (3) (3) (3) (3) (3) (3) (3) (3) (3		14900	98	68	,
4	Tin Mar Aye	*	Con	10.12.2019		CIM IN LE Shyer 10ge My ought		396	49	48	
5.	8 Winning		(Gr	2019.12.10		wide of show with ope		795	<b>હ</b> તુ	us	
6	Tun Share	.*	General	2019.1219		380x 10 elecane e 2 Cho. 1		302	-3	-8	
							×				
									1		

Figure 10-13 Workplace Incident Records

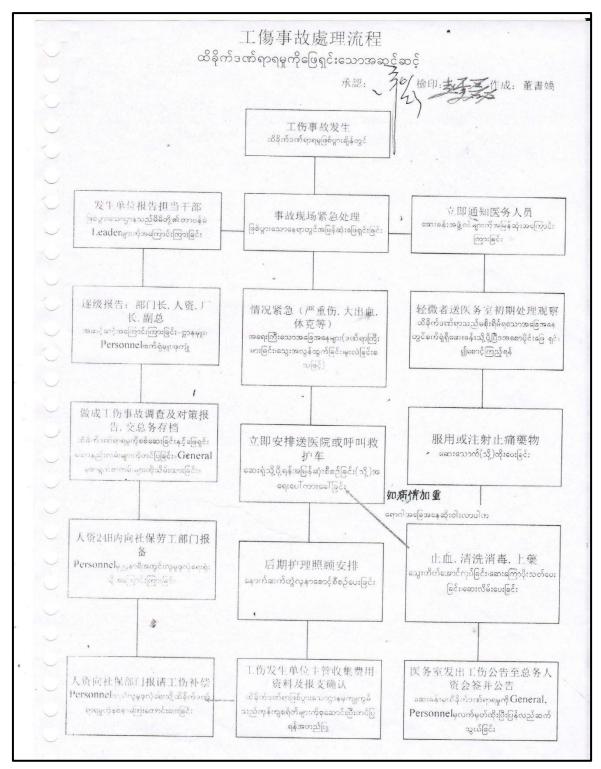


Figure 10-14 Step by Step of Solving Accident Injury

# 10.4 Safety Training

#### **10.4.1 Chemical Safety Training**

Chemical management requires that employees who handle chemicals in one way or another, or make decisions that affect chemical handling, have sufficient expertise for their tasks.

It is a matter of knowing the company's effect on the environment and ambitions in the chemicals area and understanding one's own role in contributing to safer chemicals handling. Many companies choose to provide basic training for all their staff, and further special training for those who need deeper knowledge. Training in chemicals could contain the following components:

- \* Basic knowledge concerning chemical issues in the company's operations,
- \* Tasks and responsibilities within the company,
- ❖ An overview of the regulatory system and authorities in Sweden and the EU.
- ❖ How to search for information and help via the Internet,
- ❖ Handling of chemicals in the workplace,
- The responsibilities of producers of goods, choice of chemical products and the place of chemicals in design,
- ❖ The phasing out of hazardous substances and preventive work,
- The position of chemicals in negotiating, purchasing and supplier assessment,
- Classification, labeling and safety data sheets (SDS),
- Risk assessments







Figure 10-15 Chemical Safety Training



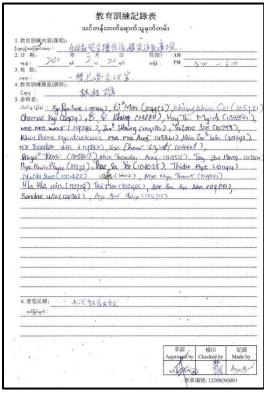


Figure 10-16 Chemical Related Substance Knowledge Training

#### **10.4.2** Fire Safety Training

The factory provides adequate fire safety training for their employees. Training plans include the following:

- ❖ What to do on discovering a fire,
- ❖ How to raise the alarm and what happens then,
- ❖ What to do upon hearing the fire alarm,
- ❖ The procedures for alerting employees, where appropriate, directing them to exists,
- ❖ The arrangements for calling the fire and rescue service,
- ❖ The evacuation procedures for employees in the factory to reach an assembly point at a place of total safety,
- ❖ The location and, when appropriate, the use of firefighting equipment,
- ❖ The location of escape routes, especially those not in regular use,
- ❖ How to open all emergency exit doors,


All the employees identified in the emergency plan that have a supervisory role if there is a fire, heads of department, fire marshals and firefighting team should be given details of fire risk assessment and receive additional training.



Figure 10-17 Firefighting Training

#### 10.4.3 Fire Drill Procedure Training

The purpose of a fire drill is to familiarize and re-enforce proper evacuation routes and practices. The goal is to have the proper actions be an automatic response whenever fire alarms sound, so that everyone safely evacuates the area in an orderly manner. Fire drills are required annually for most facilities and should be used to evaluate warning features and occupant knowledge.

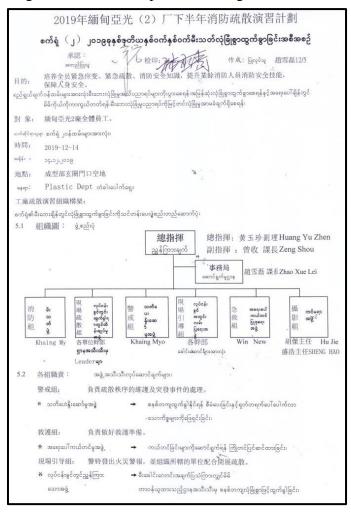



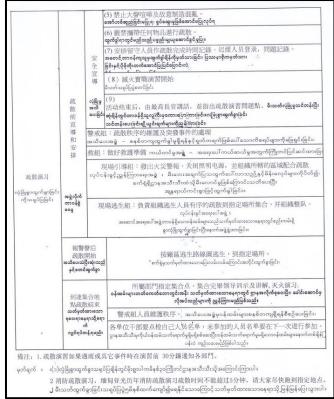


Figure 10-18 Fire Drill Plan (Factory 2)





Figure 10-19 Fire Drill Exercise (Factory 2)

#### 10.4.4 Health Safety Trainings

Myanmar Asia Optical International Co., Ltd. (MAOI) holds occupational health and safety workshops with organizers. They have trained better local knowledge and practical workplace experience to have a real impact on workers' lives. They organize to remove dangers from the factory, train workers and employees on basic safety and lobby for personal protective equipment.

## 11.0 PUBLIC CONSULTATION AND DISCLOSURE

# 11.1 Purpose

Public consultations on environmental management programs are designed to provide a real understanding of industry issues and the aim is to make the public aware of the environmental impact of industrial operations and the increase in job opportunities caused by industry. By participating in the consultation process with anyone affected by the proposed project, the business community will be able to resolve any issues that may arise in advance.

# 11.2 Methodology and Approach

Green Myanmar Environmental Services Co., Ltd. (GMES) approaches two methods for consultation and disclosure, which are meeting and receiving suggestion letters. For public consultation meeting, GMES had arranged in two ways:

- i. Quantitative approach and
- ii. Qualitative approach.

For quantitative approach, suggestion forms have been used for factory employees in the proposed area. On the other hand, for qualitative approach, group discussion has been arranged.

There are two group discussions: one for meeting with employees of the factory and another for consultation meeting with the relevant government organizations and local community in the vicinity of project.

# 11.3 Meeting with Factory Employees

This meeting aims for the health and safety of workers. Regarding to the EMP report for Myanmar Asia Optical International (MAOI) Co., Ltd., the employees were met and discussed about drinking water system, cleaning system, sanitation system, noise level, dust amount, particles, smell smoke, lighting system, ventilation system and the social situation at the workplace.

Method: Meeting
Date: 12.3.2021

Participants: Factory Employees from both Factories (242) Persons

Venue: Factory's Canteen

The attendee lists, and suggestion forms from discussion with factory employees are attached as **Appendix 29** and **Appendix 30**. The main points of discussion, questions and answers were mentioned in the **Table 11-1**.





Figure 11-1 Employees Discussion Program

Table 11-1 Excerpts from Suggestion of the Factory Employees

Sr. No.	Issues	Suggestions/ Comments	Responses of Factory In-charge						
1. Su	1. Suggestion on Occupational Health and Safety								
1.1	Personal Protective Equipment	<ul> <li>All persons mentioned that they were provided</li> </ul>	✓ PPE is provided to all employees in the factory.						
		adequately.	,						
1.2	Drinking Water	<ul> <li>All persons mentioned that they were provided with good drinking water.</li> </ul>	✓ The company provides healthy drinking water. In addition, the water quality is monitored annually.						
1.3	Sanitation System	<ul> <li>All persons recommended it is good and enough.</li> </ul>	✓ There are hand basins, soaps and hand sanitizer in toilets, public						
1.4	Cleaning System	All staff members who attended the meeting stated those soap / hand sanitizers are provided for washing.	areas and canteen entrances of the factory.						
2. Su	ggestion on Working (	Conditions in the Workplace							

Sr. No.	Issues	Suggestions/ Comments	Responses of Factory In-charge
2.1	Noise in Workplace	■ The 40 persons mentioned	✓ Noise is monitored monthly.
		there is no noise, but 7	✓ Earplugs and ear masks are
		persons mentioned there was	provided for employees who
		a little noise.	exceed the limit in the workplace.
2.2	Bad Odor	• The 45 persons mentioned	✓ Ventilation system will be
		there is no odor, but 2 persons	cleaned regularly every month.
		mentioned there was a little	
		odor.	
2.3	Workplace Light	<ul> <li>All persons recommend.</li> </ul>	✓ There are enough standard lamps
	Intensity		in every workplace of the
			company.
2.4	Particles/dust in	■ The 9 persons mentioned it	✓ Workers at the site will be fitted
	Workplace	was no particles, but 8	with a mask and regularly
		persons mentioned there was	cleaned to remove particles.
		a little.	
2.5	Ventilation System	<ul> <li>All persons recommend.</li> </ul>	✓ There is adequate ventilation in
	in Workplace		the workplace. There are exhaust
			system and air conditioning
			system.
3. Su	ggestion on the Social	Relation in Workplace	
3.1	Social Relation	<ul><li>All persons mentioned it was</li></ul>	✓ Employees from different level
	between Employees	convenient with upper level.	work or act together with good
			collaboration

# 11.4 Consultation Meeting with the Relevant Government Organization and Neighbors of the Factory

For the reporting of environmental management plan, the purpose of consultation meeting is to inform and request comments about of the project to the local community. There were 16 persons attended to the meeting, responsible person of Industry Zone Management Committee, relevant to the government organization, responsible person from the vicinity of the factory, responsible persons from both factories and third-party organization. There were received 14 comments in the meeting. The facts of public consultation meeting were shown in **Table 11-2**. The attendance lists are attached in **Appendix 31** and also suggestion sheets in **Appendix 32**.

Method: Meeting
Date: 16.10.2021

Participant: Responsible person of Industry Zone Management Committee,

relevant to the government organization, responsible person from the vicinity of the factory, responsible persons of the factory and third-

party organization.

Venue: Industries Zone Management Committee Office, Mingaladone Industry

Park (MIP), Mingalardone Township, Yangon Region.









Figure 11-2 Consultation Meeting with the Relevant Government Organization and the Neighbors of the Factory

Table 11-2 Summary of Discussion in the Meeting

Sr. No.	Participants	Explanations/ Responses of Factory
1	<ul> <li>Daw Nyo Lin Htet (Deputy Officer)         Yangon Region (North district),         Environmental Conservation Department         An environmental team must be formed at the factory.     </li> <li>Trainings and the environmental awareness program should be provided to the workers by the team.</li> <li>For more information on environmental conservation, please visit the Department of Environmental Conservation's website and social media pages.</li> <li>The guidelines set by the Department of Environmental Conservation should be followed.</li> <li>Emphasis should be placed on health care for employees working in the factory.</li> <li>It is recommended that the required business licenses for the factory business be submitted to the relevant department for approval.</li> </ul>	<ul> <li>U Kyaw Soe Win- Managing Director (Green Myanmar Environmental Services Co., Ltd)</li> <li>The skilled staff such as Pollution Control Manager or Safety Officer will be appointed in their factories.</li> <li>These employees need to take care of the occupational safety and environmental protection of the employees in the relevant factories.</li> <li>Participants were also encouraged to submit comments on the suggestion letter if they did not wish to do so in person.</li> </ul>

Table 11-3 Description of Suggestion Letter from the Meeting

Sr. No.	Name	Comments	
1	U Aung Thu	➤ Good environmental management arrangements	
2	Daw May Myo Shwe	➤ Convenient to prevent environmental damage	
		➤ Complete in all respects	
3	U Tun Lin Kyaw	➤ Social welfare of employees	
		➤ Health and employment	
		Please try to get a regular salary	
4	U Thet Myo Htike	➤ Wastewater treatment system is found at the factory	
		➤ Water pH is 6.35 according to Green Myanmar Analysis	
		➤ Wastewater treatment should be maintained regularly due to the	
		use of chemicals	
		Plastic Injection machines are running. Ventilation system	
		should be provided for odors and should be maintained	
		Chemical management plans should be developed and	
		implemented to protect the workplace and the environment	
5	Daw Zin Mar Hlaing	➤ No comments	
6	Ma May Chan Khaing	➤ No comments	
7	Daw May Aye	➤ Follow to the laws and regulations issued by the government	

Sr. No.	Name	Comments	
8	Daw Nyo Lin Htet	<ul> <li>Apply for a license from the relevant department for handling and handling chemicals</li> <li>Describe daily/monthly energy consumption in a report</li> <li>There is follow to the national environmental quality (emission) guidelines for discharging of wastewater, emission of Exhaust fumes, Noise in workplace</li> <li>It is suggested that staff be educated on environmental awareness dissemination and environmental awareness on the Environmental Conservation Department Yangon Region Facebook Page</li> </ul>	

# 12.0 WORK PLAN AND IMPLEMENTATION SCHEDULE

# **12.1** Social Environmental Aspects

- There is No rehabilitation/resettlement issues are involved
- The project on implementation will generate direct employment opportunities
- The project is a manufacturing factory, which is owned by Myanmar Asia Optical International (MAOI) Company Limited, hence the tax revenue for proposed project will be directly paid to the Government.
- Activities such as donation and charity had been implemented.
- Project proponent is already engaged with many activities under various sector such as public educational, health, cultural as well as welfare activities, and will continue the activities with updated mechanisms.

# 12.2 Time Schedule for Implementation of the EMP

The time schedule for implementation of the EMP is as follows.

Actions	Responsible Party/ Person	Monitoring/ Measurement
Develop action plans against	Myanmar Asia Optical	Will do in future
mitigation measures	International (MAOI) Company	
Implement mitigation action	Limited	No need yet
plans, re-layout, install new		
equipment		
Install fire protection system at		Done
storage area		
Provide training and on EMP		Training Records
implementation		

# 13.0 CONCLUSIONS AND RECOMMENDATIONS

During the preparation of EMP report, it was observed that most of the negative impacts on the environment are largely localized. The negative environment impacts that will result from the project include waste generation, emissions, and fire hazards during operation which, however, can be mitigated if adequate control measures are taken. Based on this environmental study, environmental management and mitigation measures are proposed to ensure that there are no environmental impacts that exceed acceptable levels.

# 13.1 Findings

The impact on the social environment shall be positive because of the local people is hired during operation of the project, and hence, improving the livelihood. Since the proposed project area is in the industrial zone, there is no significant impacts for biodiversity, cultural and heritages.

For the environmental quality monitoring, **Ambient air quality** was measured for 24 hours within the project area. The collected air quality monitoring data were checked with the target values and the results are recorded in Tables. It was found that the particulate matters (PM<sub>10</sub> and PM<sub>2.5</sub>) were much higher than the guideline values because vehicles and humans are moving around the air measuring station. The other parameters of the ambient air quality are within the National Environmental Quality (Emission) Guidelines. The **workplace** (**indoor**) **air quality** was measured at 11 locations, although there are no specific guidelines. The **stack emission measurement** was done. The results of stack emission gases from generators are within the desirable limits and the other parameters do not have the specific guidelines.

Ambient noise level measuring was measured for 24 hours within the project area, at the same ambient air quality measuring points. According to the investigation, both daytime and nighttime results are within the guidelines, and it can be said that the noise values cannot affect the workers and the environment. The workplace (indoor) noise level measuring was done at 11 locations and the results are compared with OHS exposure guidelines. According to the measuring results of average noise levels at workplace, the noise levels were within the acceptable conditions except generator room. The major noise pollution source inside the factory may be happened due to operation of generators and they are used in case of emergency only when the electricity goes out.

**Light intensity** measuring was done at one location in the workplace and all the results were within the acceptable limits.

For water quality, selected water quality parameters of ground water have been studied for assessing the water environment and evaluating the anticipated impact of the proposed project, tube well water and wastewater samples were collected and analyzed at the laboratory of Green Myanmar Environmental Services Co., Ltd. and ALARM ecological laboratory. According to the water quality results, even though the turbidity values decrease from 10.7 NTU to 8.86 NTU after treatment, turbidity from WSP-1 (Tube well water) and WSP-3 (Treated water) are still higher than the guidelines. Manganese and total iron from WSP-1 are higher than the guidelines but after treating they are within the guideline values. pH value from WSP-2 is a little lower than the guidelines and the other parameters are within

the limits. According to the wastewater analysis results, most of the parameter measured from wastewater samplings are within the guideline values except the value of TSS from WSP-5 (Wastewater Treatment Plant-Inlet). After this is treated in wastewater treatment plant, it can be seen that the TSS value decreases from 1510 mg/l to 20 mg/l. Therefore, the wastewater treatment system is effective.

In order to monitor the **soil quality**, soil sample is collected from inside the project site and tested at GMES laboratory. The analysis results of the physico- chemical parameters are presented in Tables.

The main impact for this project is solid waste generation, wastewater generation and fire hazards. Even though the project proponent provides the firefighting equipment and waste disposal system, make sure to follow the instruction every time.

#### 13.2 Recommendations

The following recommendations have been made for efficient and effective implementation of environmental conservation, ecosystem management, health and safety, social responsibilities measure through the lifespan of the proposed project:

- Follow the comments and suggestions made by ECD after reviewing this EMP report
- Once EMP is approved by concerned authorities, strict implementation is essential
- For full and proper implementation of EMP, well understanding and supports by proponent and its administrative authority is deeming necessity
- Fully implement Corporate Social Responsibility (CSR) Plan as an ethical business obligation, so as to be regarded as good neighbor/investor in the neighborhood
- Daily, monthly and annual action plan shall be formulated based on EMP and fully practiced
- Environmental Management Plan (EMP) in this report mainly deals through awareness campaigns, provision of safety measures and sanitation such as clean toilets, provision of first-aid kit, training and estimated cost required for implementation of EMP.

The project proponent also needs to provide -

- 1. Separate clinic room with patient beds where injury employees can rest for a while
- 2. First-aid kits at operation rooms in order to give medical assistance for less severe accidence at workplace
- 3. Write Emergency Calls Numbers clearly on notice board
- 4. Keep ready Standard Operation Procedure for machines and Safety Data Sheet (SDS) for materials at visible working place
- 5. Provide more ventilation at workplaces
- 6. Clean regularly to remove foul odor from toilets
- 7. Use two languages (Chinese and Myanmar) in instructions and notices so that all employees can understand clearly
- 8. Plant trees for fresh air

#### 13.3 Conclusions

The positive impacts will arise from the project if well implemented and laws adhered to and will benefit all stakeholders in the region. The project proponent has promised to adhere to prudent implementation of the environmental management plan in addition to carrying out annual environmental audits which identify and mitigate any unforeseen negative impact.

In addition, the following conclusions are drawn:

- ➤ There will be no significant negative impacts arising from the operation of the proposed development.
- > The proposed development and associated infrastructure implementations are of an appropriate scale relative to the existing layout.
- > The development is consistent with the national development ambitions for the area.
- ➤ No significant adverse impacts on cultural and industrial heritage arise from the development.

The Project will cause some minor environmental impacts, which will be both positive and negative. The impacts resulting from the Project include

- air emission and suspension of dust,
- increased traffic within the industrial zone due to the transportation of raw materials and products,
- increased growth in the economy of the region,
- substantial income and employment opportunities and
- reduced poverty.

Implementation of appropriate mitigation measures during operation phases will minimize the negative impacts of the project to acceptable low levels. Environmental monitoring of the project will be undertaken regularly and through the first five years of its operation to ensure that the measures are being implemented properly and in compliance with the environmental rules and regulations.

In conclusion, the project will have overall beneficial impacts in reducing air pollution, dust, and improving socioeconomic conditions along the project corridor, and will have insignificant negative impacts, which will be carefully monitored and adequately mitigated.